

IAC-22-B4.3 x69745

## **CAPSTONE: A Unique CubeSat Platform Operating in Cislunar Space**

**Tom Gardner<sup>a\*</sup>, Brad Cheetham<sup>a</sup>, Jeff Parker<sup>a</sup>, Alec Forsman<sup>a</sup>, Ethan Kayser<sup>a</sup>, Michael Thompson<sup>a</sup>, Connor Ott<sup>a</sup>, Lauren DeMoudt<sup>a</sup>, Matt Bolliger<sup>a</sup>, Arlen Kam<sup>a</sup>, Keith Thompson<sup>b</sup>, Tristan Latchu<sup>b</sup>, Rebecca Rogers<sup>b</sup>, Brennan Bryant<sup>c</sup>, Tomas Svitek<sup>c</sup>**

<sup>a</sup> *Advanced Space, LLC, 1400 W 122nd Ave Suite 200, Westminster, CO 80234, gardner@advancedspace.com*

<sup>b</sup> *Terran Orbital, 15333 Barranca Parkway, Irvine, CA 92618, keith.thompson@terranorbital.com*

<sup>c</sup> *Stellar Exploration, Inc, 835 Airport Dr, San Luis Obispo, CA 93401, brennan@stellar-exploration.com*

*\* Corresponding Author*

### **Abstract**

With the number of NASA, commercial, and international missions to the Moon growing rapidly, the need to make these future endeavors as efficient as possible is a challenge that is being solved now. Advanced Space is aiming to mitigate the existing Earth based tracking and communications resource limitations by enabling spacecraft in the cislunar environment to navigate autonomously and reduce the need for oversubscribed ground assets for navigation and maneuver planning.

Launched on June 28 2022 and operating successfully in its transit deep space transfer cislunar orbit, the Cislunar Autonomous Positioning System Technology Operations and Navigation Experiment (CAPSTONE) mission is utilizing a highly capable 12U CubeSat to demonstrate the Cislunar Autonomous Positioning System (CAPS) software as well as a validation of the mission design and operations of the Near Rectilinear Halo Orbit (NRHO) that NASA has baselined for the Artemis Lunar Gateway architecture. The CAPS software enables cislunar missions to manage their navigation functions themselves and reduces the reliance on Earth based systems.

The CAPSTONE spacecraft has recently performed its third Trajectory Correction Maneuver (TCM) and will soon insert into the NRHO where it performs the CAPS technology demonstration in collaboration with the Lunar Reconnaissance Orbiter (LRO) team at NASA's Goddard Space Flight Center to demonstrate the CAPS autonomous navigation system. Success criteria for CAPSTONE in this demonstration are defined as 1) semi-autonomous operations and orbital maintenance of a spacecraft in an NRHO, 2) collection of inter-spacecraft ranging data in support of the autonomous navigation process, and 3) execution of the CAPS navigation software in an autonomous mode on-board the CAPSTONE spacecraft. Additionally, CAPSTONE is demonstrating an innovative one-way ranging navigation approach utilizing a Chip Scale Atomic Clock (CSAC) and additional autonomous navigation algorithms.

Advanced Space, along with our partners at NASA, the Jet Propulsion Lab (JPL), Terran Orbital, Stellar Exploration and Rocket Lab, have developed and implemented the CAPSTONE mission to support both NASA's upcoming Gateway operations development and the expanding commercial cislunar economy. This high value mission has already demonstrated an efficient low energy orbital transfer on its way to NRHO insertion and will soon demonstrate full-scale operations in this unique orbit. Over the next 20 months, CAPSTONE will continue to validate these key operations and navigation technologies required for the success of NASA's lunar exploration plans. This presentation will include an overview of the current mission status, lessons learned from the launch, transfer, and planned insertion into the NRHO, and an overview of mission operations to date.

**Keywords:** (CAPSTONE, Artemis, cislunar, navigation, NRHO, operations)

### **Acronyms/Abbreviations**

CAPSTONE: Cislunar Autonomous Positioning System Technology Operations and Navigation Experiment

CSAC: Chip Scale Atomic Clock

ICM: Insertion Correction Maneuvers

LRO: Lunar Reconnaissance Orbiter

NIM: NRHO Insertion Maneuver

NRHO: Near Rectilinear Halo Orbit

OMM: Orbit Maintenance Maneuvers

SBIR: Small Business Innovative Research

TCM: Trajectory Correction Maneuver

TRL: Technology Readiness Level

### **1. Introduction**

The CAPSTONE mission is a pathfinder for NRHO operations that will be vital for future Lunar Gateway activities. Awarded in mid-2019 to Advanced Space, the mission has since completed its key development and implementation milestones and was recently launched from the Rocket Lab LC-1B in Mahia, NZ into its deep space, cislunar transfer orbit to the Moon. Partnering with Terran Orbital, Stellar Exploration, and Rocket Lab as well as working closely with NASA through multiple centers, the CAPSTONE mission represents not only the first steps to laying the foundation of the Artemis Program but also a different way of collaboration. By utilizing the best features of commercial and

governmental capabilities, this technology demonstration is being executed in a rapid and low-cost mission not typically seen in more traditional NASA small-mission contracts.

In addition to the orbital and operational focuses of this demonstration, the mission serves as a technology demonstration of an Advanced Space navigation product developed via a NASA SBIR that concluded its Phase II period of performance and has been extended into Phase III for this demonstration mission. The Cislunar Autonomous Positioning System (CAPS) is Advanced Space's solution to the lunar mission congestion predicted to dramatically increase in the coming years as government, commercial, and international interests bring more missions into the cislunar environment in and about the Moon. By demonstrating this absolute inertial navigation capability on the CAPSTONE mission, it will also rapidly raise the TRL, commercialization options, and infusion of CAPS in preparation of the cislunar traffic to come.

This paper will provide an overview of the mission, through its objectives and operations, as well as insight into the science payloads and their significance to both this mission and future ones and provide an update on the ongoing mission operations to date.

## 2. Mission Objectives

The CAPSTONE mission has objectives that will serve the interests of NASA, Advanced Space, and future participants in the cislunar ecosystem. Detailed below, the objectives cover science, technology, and mission operations as part of the overall demonstration that CAPSTONE will perform:

### 2.1 *Validate and demonstrate NRHO / highly dynamic Earth-Moon Operations*

The first mission objective is focused on mitigating technical uncertainties associated with operating in the uniquely beneficial and challenging orbital regime defined as NRHO's. This objective will include demonstrating navigation capabilities and validating stationkeeping strategies and operational simulations. This objective will directly support future missions through dissemination of operational information and by obtaining operational experience in this unique orbital regime.

### 2.2 *Inform future lunar exploration requirements and operations*

The second CAPSTONE mission objective is focused on building experience operating in complex lunar orbital regimes to inform future lunar exploration requirements and operations, including human exploration flights with

lower risk thresholds and higher certainty of success requirements. This will include the establishment of commercially available capacity to support NASA, commercial, and international lunar missions in the future. This objective also seeks to demonstrate the capacity of innovative NASA-industry approaches to rapidly bring capabilities to the Moon and challenge current expectations for cost and schedule.

### 2.3 *Demonstrate and accelerate the infusion of the Cislunar Autonomous Positioning System (CAPS)*

The third objective is focused on demonstrating core technical components of CAPS in an orbital demonstration. This objective will include collaboration with the operations team at NASA Goddard Space Flight Center to demonstrate inter-spacecraft ranging between the CAPSTONE spacecraft and the Lunar Reconnaissance Orbiter (LRO) currently in operation at the Moon. In addition to demonstrating key inter-spacecraft navigation in cislunar space, CAPSTONE will also enhance the technology readiness level of the CAPS software. This accelerated maturation will permit it to be available to support near term flight plans to the Moon and to be more widely adopted by future lunar missions and thus increase the value of this peer-to-peer navigation capability.

## 3. Mission Overview

### 3.1 *Proposal and Contract*

Proposed and funded in mid-2019, the CAPSTONE mission was awarded a contract through NASA's Small Spacecraft Technology Program (SSTP) with an initial level one objective of achieving launch readiness within 18-24 months of contract award. This mission represents a new way of commercially partnering with NASA to enable rapid and cost-efficient technology demonstrations for highly condensed returns in experience to inform near-term operational needs. Due to the impacts of the Covid-19 global pandemic and development issues with the launch vehicle's new upper stage, actual launch readiness was achieved after 36 months in June 2022.

### 3.2 *Hardware*

The CAPSTONE spacecraft is a 12U CubeSat (Figure 1, Table 1) that has been designed and built by Terran Orbital based on their existing commercial 12U satellite bus. In addition to the CAPS payload flight board, CAPSTONE also includes a color commercial CMOS imager for generating images of the Earth and Moon, two communication systems (X-band and S-band) as well as a CSAC for generating additional 1-way navigation data.

Table 1. CAPSTONE Spacecraft Key Characteristics

Subsystem	Value
Battery Modules	QTY 3x, 182 W-hr storage
Solar Panels	Deployable Fixed Angle Arrays, Peak Power 114W (BOL), 120 XTJ Prime cells
Space / Ground Radio	Iris Radio, 3.8W, operating at 8.45 GHZ downlink, 7.19 GHz receive
Space / Ground Antennas	X-band high gain & low gain patch antennas, on spacecraft Y- and Y+ faces
LRO Crosslink Radio	TUI SLX, 2W, operating at 2.091 GHz transmit, 2.271 GHz receive
LRO Crosslink Antenna	S-band patch antenna on Z+ face
ADCS Control	Coarse sensor module, redundant star trackers, redundant IMUs with STIM 320 10g, four pyramidal reaction wheels
Thermal Control	Active battery heaters, 16 thermistor channels, 8 independent heaters, passive coatings and MLI
Propulsion	8x 0.25N thrusters, 3.25 kg fuel, >200 m/s $\Delta V$

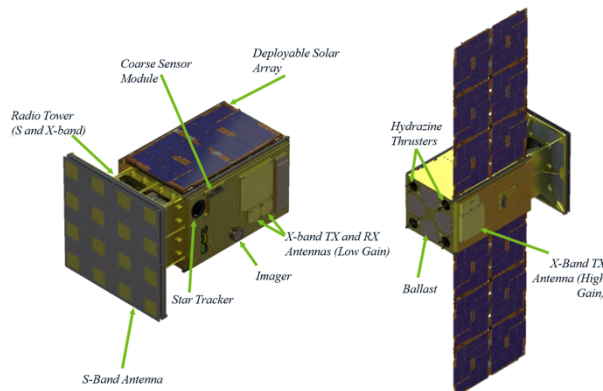


Figure 1. CAPSTONE spacecraft in a stowed (left) and deployed (right) configuration.

### 3.2.1 Communications

The X-Band system is used to communicate with the ground, while the S-Band system will perform radiometric measurements with LRO to gather data for the CAPS payload. The flight proven, mature Iris X-Band system will be used for both two-way communication and ranging as well as part of the 1-way ranging experiment, while the S-Band system will perform coherent, 2-way radiometric measurements with LRO to gather data for the CAPS payload using a S-Band patch array antenna.

### 3.2.2 Propulsion

The spacecraft hosts a monopropellant hydrazine propulsion system, designed, implemented delivered by Stellar Exploration, Inc., which provides over 220 m/s of total  $\Delta V$  with eight 0.25-Newton thrusters. Four thrusters will be used for translational maneuvers and attitude control, and four thrusters will be used for attitude control and momentum desaturation.

### 3.2.3 Payloads

The CAPS navigation software will be hosted on a separate flight computer from the spacecraft's primary redundant flight computer boards and will operate

distinctly from one another. Being hosted on a separate board allows for the CAPS software to experience updates and modifications throughout the demonstration as observations are returned, without disrupting the operations of the primary flight computer(s).

Described further in Section 5.1, the CAPS development received follow-on funding through a Phase II-E SBIR award to support development and integration of an additional component added to the CAPSTONE spacecraft design. An integrated Chip Scale Atomic Clock (CSAC) will provide an additional data 1-way ranging type using the Iris X-Band radio for navigation measurements to support CAPS when other methods are not readily available. A significant part of the demonstration is developing and testing the capability of CAPS to ingest these CSAC time tagged measurements in addition to the LRO crosslink and ground-link inputs.

## 4. Operations Overview

The mission launched on June 28, 2022, and after an approximate four-month, low energy deep space transfer with several TCM maneuvers, the spacecraft will insert into the NRHO on November 13, 2022, and then perform its primary and enhanced mission over the next eighteen months. From the post-launch TLI deployment state, the spacecraft is traversing a low-energy Ballistic Lunar Transfer (BLT), which is a very energy-efficient means of transferring from the LEO environment to an orbit near or about the Moon. The spacecraft has and will perform up to six Trajectory Correction Maneuvers (TCMs) that cleaned up launch injection errors, navigation, and maneuver execution and NRHO orbit insertion targeting prior to arriving at its NRHO insertion point. The spacecraft will then perform a relatively small maneuver to insert into the NRHO; this maneuver is referred to as the NRHO Insertion Maneuver (NIM). Two small clean-up maneuvers are planned to ensure that the spacecraft is successfully inserted into the NRHO: Insertion Correction Maneuvers 1 and 2 (ICM-1 and ICM-2). From there, small stationkeeping maneuvers, known as Orbit Maintenance Maneuvers (OMMs) in combination with momentum desaturation, are

performed on a weekly cadence to remain in the NRHO. Finally, a small Decommissioning Maneuver (DM) is performed when the mission is complete to safely decommission the spacecraft to either deep space or to a predetermined designated impact point on the lunar surface.

#### 4.1 Launch

The CAPSTONE spacecraft launched (Figure 2) on a three-stage Electron, a launch vehicle developed by Rocket Lab that includes the first ever use of the Lunar Photon upper stage (Figure 3). After launching into a low Earth orbit from the Rocket Lab LC-1 on Mahia Peninsula, NZ at a latitude of approximately  $-39^\circ$ , the Lunar Photon third stage performed a series of apogee raising maneuvers to achieve the trans-lunar injection (TLI) characteristic energy,  $C_3$ , of approximately  $-0.7 \text{ km}^2/\text{s}^2$  that put the spacecraft on its deep-space BLT trajectory. A true ballistic BLT (no deterministic maneuvers) requires instantaneous Sun-Earth-Moon geometry; however, a deterministic apogee maneuver (TCM-2) was required in order to build a TLI period, as well as target a specific NRHO [1,2].



Figure 2. CAPSTONE Launch, 28 June 2022



Figure 3. The CAPSTONE Spacecraft/Dispenser-Lunar Photon Integrated Stack

#### 4.2 BLT Maneuver

Ballistic Lunar Transfers (BLTs) are a type of low-energy transfer in which a spacecraft travels to an apogee of 1-1.5 million kilometers to utilize the Sun's gravity to modify the spacecraft's orbital perigee and inclination.<sup>1,2</sup> For CAPSTONE, this effect is used to decrease the inclination from a launch latitude of  $\sim 39^\circ$  to an inclination in line with the Moon's orbital plane, as well as raise the spacecraft's perigee to the radius of the Moon. This reduces the deterministic spacecraft  $\Delta V$  to approximately 20-60 m/s, compared to the 350-550 m/s required for a direct transfer to an NRHO. This reduction in spacecraft  $\Delta V$  enables the mission to be achieved with a 12U-class CubeSat. The TLI  $C_3$  of approximately  $-0.7 \text{ km}^2/\text{s}^2$  is higher than  $-2.0 \text{ km}^2/\text{s}^2$ , the value needed for a direct transfer. The BLT for CAPSTONE requires approximately four months of time to traverse, which is substantially longer than a direct transfer. This extended transfer duration provides for advantages from an operational perspective. First, there has been ample time to characterize and navigate the spacecraft performance and then perform well-timed trajectory correction maneuvers that allow for a consistent entry time into the NRHO. When the spacecraft reaches its perigee, it encounters the Moon and inserts into the NRHO.

#### 4.3 Trajectory Correction Maneuvers

CAPSTONE must perform multiple Trajectory Correction Maneuvers (TCMs) (Figure 4) in order to clean up launch vehicle errors, target the insertion maneuver timing to achieve an Earth-eclipse free NRHO, as well as correct for navigation and maneuver execution



errors. Given that the CAPSTONE spacecraft must achieve both a specific state and epoch after insertion to achieve an Earth-eclipse free NRHO, the TCMs and insertion maneuver are designed using a three-burn optimization, rather than a simple one or two-burn targeter. Each correction maneuver is designed to minimize the sum of the  $\Delta V$ s of the current TCM, the next TCM, and the insertion maneuver to achieve a state along the reference NRHO (and corresponding epoch). The final TCM is not redesigned, but rather executed as it is designed in the previous TCM's optimization. The insertion maneuver initial epoch is also part of the optimization, while the TCMs are fixed in time.

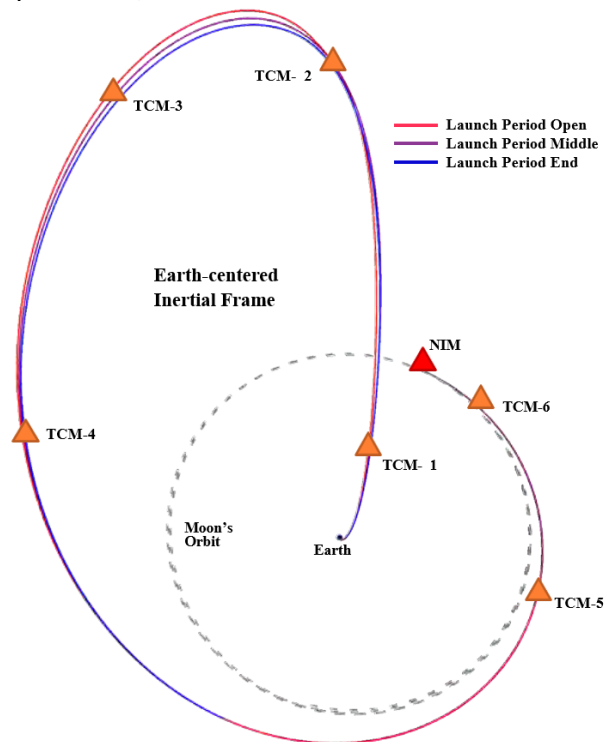


Figure 4. TCM Placement in the Earth-Centered EME 2000 Frame

#### 4.4 Insertion into NRHO

Given the objective of demonstrating NRHO stationkeeping and operations to inform future lunar exploration, CAPSTONE will operate in the same sized orbit targeted by the Lunar Gateway: a 9:2 resonant, southern L2 NRHO (Figure 5). For every two lunar synodic periods, approximately 29.53 days each, CAPSTONE will complete 9 revolutions in its NRHO.

There are four families of NRHOs, distinguished by the location of their apolune. The apolune may be stretched towards either the L1 or L2 Earth-Moon Lagrange point and may be either above (northern) or below (southern) the lunar orbital plane. A 9:2 resonant NRHO only exists in the L2 family, and the southern trajectory was chosen to maximize the Lunar Gateway's

time over the lunar south pole, an area especially of interest to lunar exploration.

The NRHO Reference Orbit (NRHO) is specifically designed to avoid Earth induced solar eclipses for the duration of the primary and enhanced missions (~18 months), as well as align the epoch of the first perilune with the low-energy transfer to minimize the  $\Delta V$  required to achieve the NRHO. Although periodic in the circular restricted three-body problem, a multi-shoot method was used to build an Earth-eclipse free, 90-revolution NRHO with minimal discontinuities in the ephemeris model.

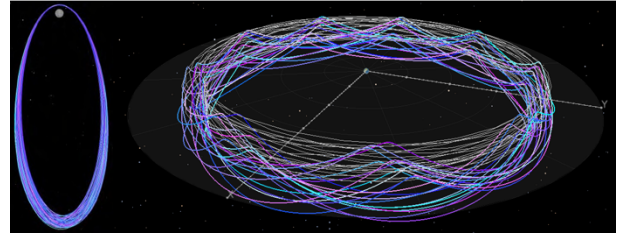


Figure 5. NRHO Reference Orbit in the Earth-Moon Rotating (left) and Sun-Earth Rotating (right) Frames

As the spacecraft arrives at the Moon it targets the reference NRHO periapse passage, and the spacecraft must precisely insert into the NRHO. Planetary missions are often robust to large maneuver execution errors upon insertion into a capture orbit because the capture orbit simply must be safe and otherwise a good transition to the science orbit via additional maneuvers. CAPSTONE's insertion is quite different from this model. First, the NRHO Insertion Maneuver (NIM) is on the order of 20 m/s, quite a small maneuver compared with conventional planetary orbit insertions. Second, the maneuver must very accurately target the NRHO. If the post-NIM state, mapped to the nearest periapse, is more than 5 m/s different from the NRHO periapse state, the resulting orbit is far different from the NRHO, and the mission must spend a significant amount of fuel to return to the reference NRHO. One way in which CAPSTONE's orbit insertion is similar to conventional planetary insertions is that the NIM is considered a critical maneuver: it must be performed approximately as designed or else the mission is substantially impacted.

CAPSTONE introduces two maneuvers following NIM: ICM-1 is performed one day later to clean up NIM execution errors; ICM-2 is performed three days after ICM-1 to complete the insertion process into the reference NRHO. The two ICM's offer six degrees of freedom to achieve a six-state at the time of ICM-2, i.e., they compose a two-burn transfer from the post-NIM orbit to the reference NRHO and must be performed relatively soon after NIM in order to avoid exponentially increasing  $\Delta V$  cost. Some separation is desirable between the two ICMs to give the spacecraft time to drift from the post-NIM orbit to the reference NRHO, but it is desirable

to achieve the transfer prior to the next periaipse passage since periaipse passages are very sensitive to orbital

errors. A full summary of all TCM's, ICM's and OMM's their timing, and purpose are outlined below (Table 2).

Table 2. CAPSTONE's Planned Maneuvers

Maneuver	Date / Timing	Purpose	Status
<b>TCM-1</b>	Executed in two parts on 6 July 2022 & 11 July 2022	Correct launch vehicle insertion errors	Completed
<b>TCM-2</b>	Executed on 25 July 2022, 55 days before insertion	Deterministic maneuver to correct for non-optimal Sun-Earth-Moon geometry	Completed
<b>TCM-3</b>	Executed on 8 September 2022, 60 days before insertion	Correct for errors in the execution and design of TCM-2	Completed
<b>TCM-4</b>	Mid October 2022, ~20 days before insertion	Target the NRHO insertion state	Planned
<b>TCM-5</b>	Early November 2022, ~10 days before insertion	Target the NRHO insertion state	Planned
<b>TCM-6</b>	Early November 2022, ~5 days before insertion	Target the NRHO insertion state	Planned
<b>NIM</b>	13 November 2022, ~90-120 days after launch	Insert into the NRHO and get captured in lunar orbit	Scheduled
<b>ICM-1</b>	14 November 2022, ~1 days after insertion	Target the NRHO Reference Orbit (NRO)	Planned
<b>ICM-2</b>	18 November 2022, ~5 days after insertion	Target the NRHO Reference Orbit (NRO)	Planned
<b>OMMs</b>	Every 6-7 days during the primary and enhanced mission	Maintain the CAPSTONE spacecraft near the NRO	Planned
<b>DM</b>	21+ months after launch	Safely dispose of the CAPSTONE spacecraft to heliocentric space or the lunar surface	Planned

#### 4.5 Daily Operations

The orbit maintenance strategy for CAPSTONE is both informing and responding to projected lunar Gateway requirements. CAPSTONE's orbit maintenance maneuvers (OMM) are based on the "X-axis crossing control" strategy—a low-cost, robust method of maintaining NRHOs for long durations [3-5]. The maneuver is designed to achieve a target 6.5 revolutions downstream (that is, at the seventh perilune crossing), where the target is the X-velocity of the reference orbit (NRO) in the Earth-Moon rotating frame at that perilune. This strategy is low-cost and effective at maintaining the NRHO-like motion, but the controlled spacecraft drifts away from the reference over time. This drift is realized not only in the position and velocity states of the spacecraft, but also the phasing. Such a drift is undesirable because the NRHO for CAPSTONE was designed to avoid Earth induced solar eclipses by targeting strict phasing.

Different approaches to correct this drift have been developed [6,7]. Some of these strategies implement a two-burn sequence to correct the phasing, while others implement small augmentations to the traditional X-axis crossing algorithm [8]. The current OMM approach baselined for CAPSTONE supplements the traditional

X-axis crossing control algorithm by adding an epoch constraint to the maneuver targets. This constraint requires the perilune passage time of the controlled spacecraft to match the perilune passage time of the reference spacecraft to some tolerance.

Other OMM augmentations were considered as well. These augmentations incorporated different aspects of phase-control strategies presented in literature, such as where in the NRHO the OMM is performed. In these cases, where the location of the maneuver was changed, the same epoch constraint as discussed in the CAPSTONE baseline OMM strategy are still implemented [6]. The additional maneuver locations chosen were 160° and 200° osculating true anomaly (in the Earth-Moon rotating frame).

#### 5. Cislunar Autonomous Positioning System (CAPS)

CAPS is a unique innovation that operationalizes, and leverages investments made in algorithms, flight computers, and radios over the past decade. At its foundation, CAPS starts with the algorithms and logic of automated navigation layered on top of an innovative approach to absolute orbit determination that requires only relative radiometric ranging and Doppler measurements. In its most streamlined implementation, CAPS will be a software innovation that can be incorporated on any future spacecraft using multiple types of ranging data.

### *5.1 SBIR Development*

From 2017 to present, the CAPS development has been supported via NASA SBIR contract through Goddard Space Flight Center. In this time the software was developed and tested in a lab environment that readied it for further integration and ultimately flight testing. With the Phase II concluded in mid-2020, the CAPS research and development was funded for continuation through a Phase IIE and Phase III SBIR awards. The intent for these awards is the ongoing development and support of the software as it approaches demonstration on the CAPSTONE mission. Part of these funding extensions is also to expand the data types ingestible by CAPS (such as the one-way ranging uplink), thereby widening its navigation capabilities in the cislunar environment.

### *5.2 Crosslink*

To demonstrate and accelerate the infusion of the Cislunar Autonomous Positioning System (CAPS), CAPSTONE will perform numerous crosslink communication passes with the Lunar Reconnaissance Orbiter (LRO) using its S-band telecommunication system. The tracking passes will occur when CAPSTONE is nearer to periapse, as LRO is in a polar, low lunar orbit. The availability of these passes will depend on several factors, including each spacecraft's power, their relative distances, lunar occultations, pointing constraints, and LRO ongoing science operational priorities. These tracking passes will provide two-way, coherent range and Doppler measurements to the CAPS flight software onboard CAPSTONE. The flight software will demonstrate CAPS in flight, while also downlinking the CAPSTONE-LRO crosslink data to the ground for further navigation filter refinement, validation, and development. The objective for CAPSTONE is to accelerate the infusion of autonomous spacecraft navigation, where such crosslink tracking may support the navigation needs of both spacecraft in the link. Eventually, during the enhanced mission phase, the goal is for the CAPS software to provide full autonomous navigation onboard the CAPSTONE spacecraft thus demonstrating this capability for future cislunar mission applications.

### *5.3 Vision of a CAPS-enabled future*

As cislunar space is poised for significant increases in mission activity, missions large and small are inherently constrained by the current limitations of ground tracking systems such as DSN and the Near Space Network (NSN). The increasing complexity of this problem is the ambiguity with which schedule and mission scope can be accurately projected. Many of these missions will be operating in orbital regimes that would normally require frequent tracking and station keeping maneuvers,

which drives the demand for ground-based navigation support even higher. NASA's Artemis Program of lunar exploration will return US astronauts to the Moon and lay a foundation for development of lunar resources. The Artemis Program lunar architecture now in development includes major elements such as the Orion space capsule, the Lunar Gateway, a lunar lander, and the Space Launch System (SLS). Gateway will serve as a departure point for human excursions to the surface of the Moon. Many of these projects, and others from around the world, are now in development and can benefit from the CAPS capabilities for their operational navigation requirements.

Advanced Space foresees a future of increasing scientific, exploration, and commercial activity within cislunar space. Future missions operated by NASA, commercial entities, and international agencies will face increasing congestion due to limited communication and navigation infrastructure.

## **6. Current Mission Status**

Currently, the CAPSTONE spacecraft (Figure 6) is in the BLT cislunar orbit on its way to the NRHO insertion on November 13, 2022. The spacecraft is healthy and performing well and has successfully executed the necessary maneuvers planned for the mission thus far.

The Lunar Photon performed well in its orbit raising and TLI insertion maneuvers without issue and it has continued on its own deep space trajectory after the CAPSTONE spacecraft deployment.

All operations systems at the Terran Orbital Mission Operations Center (MOC) for spacecraft TT&C and at the Advanced Space Operations Center (ASOC) for navigation and flight dynamics management continue to perform well.

Coordination with the LRO operations team continues and both the CAPSTONE and LRO teams are ready to support the inter-spacecraft ranging operation in late 2022 or early 2023 in support of the CAPS on-orbit demonstration.

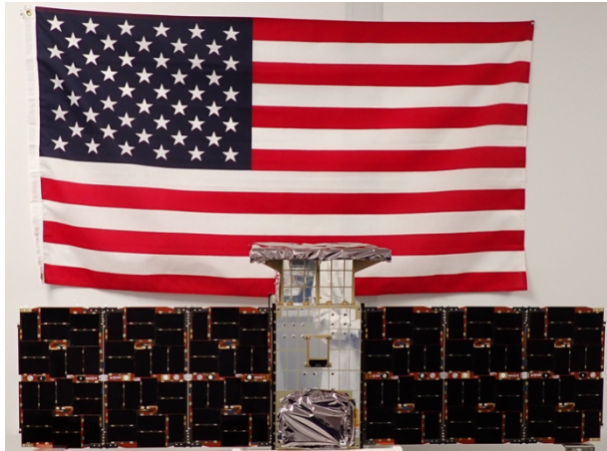


Figure 6. CAPSTONE Spacecraft Flight Configuration

## 7. Conclusions

As the Moon becomes the focus of more entities – whether governmental, commercial, or international – it is becoming imperative that there is a stronger understanding of the nuances and difficulties faced by future spacecraft as they enter this new environment. Not only is CAPSTONE providing rapid feedback and experience on operational challenges soon to be faced by the future Lunar Gateway and other Artemis Program missions, but it is doing so in a way that is expedited via commercial strengths in schedule, cost, and risk management. It is the hope and goal of the Advanced Space CAPSTONE team that this technology demonstration will not only support Artemis operations and CAPS maturation but will also model a new way of commercial partnerships for NASA and other agencies to pursue in support of their directives.

## Acknowledgements

The CAPSTONE mission is a rapid and low-cost small spacecraft pathfinder for the Artemis program that will also demonstrate the CAPS technology. CAPSTONE is supported by NASA's Space Technology Mission Directorate through the Small Spacecraft Technology program and by the Human Exploration and Operations Mission Directorate through the Advanced Exploration Systems program. CAPS is supported by NASA's Small Business Innovation Research (SBIR) program.

The authors would like to thank Christopher Baker (HQ-STMD), Elwood Agasid (ARS-SSO), Roger Hunter (ARC-SSO), Norman Phelps (KSC-LSP), Jennifer Donaldson (GSFC) and the entire LRO Operations Team (GSFC) at NASA for their ongoing support of the CAPSTONE mission. We also wish to thank the AIAA Small Spacecraft Technology Committee for its recent award to the CAPSTONE team for the 2022 Small Spacecraft "Mission of the Year".

## References

### *List of references*

- [1] Parker, J. S. & Anderson, R. L., Low-Energy Lunar Trajectory Design, J. Wiley, 2014.
- [2] Davis, D. C., S. A. Bhatt, K. C. Howell, J. Jang, R. L. Whitley, F. D. Clark, D. Guzzetti, E. M. Zimovan, and G. H. Barton, Orbit Maintenance and Navigation of Human Spacecraft at Cislunar Near Rectilinear Halo Orbits, AAS 17-269, 27<sup>th</sup> AAS/AIAA Space Flight Mechanics Meeting, San Antonio, Texas, 2017, 5 – 9 February.
- [3] Guzzetti, D., E. M. Zimovan, K. C. Howell, and D. C. Davis, Stationkeeping Methodologies for Spacecraft in Lunar Near Rectilinear Halo Orbits, AAS 17-395, 27<sup>th</sup> AAS/AIAA Space Flight Mechanics Meeting, San Antonio, Texas, 2017, 5 – 9 February.
- [4] Newman, C. P., D. C. Davis, R. J. Whitley, J. R. Guinn, and M. S. Ryne, Stationkeeping, Orbit Determination, and Attitude Control for Spacecraft in Near Rectilinear Halo Orbit, AAS 18-388, AAS/AIAA Astrodynamics Specialists Conference, Snowbird, Utah, 2018, 19 – 23 August.
- [5] Davis, D., C., Khoury, F. S., Howell, K. C., Sweeney D. J., Phase Control and Eclipse Avoidance in Near Rectilinear Halo Orbits, AAS 20-047, 43<sup>rd</sup> AAS Guidance Navigation and Control Conference, Breckenridge, Colorado, 30 January – 5 February 2020.
- [6] Parrish, N. L., Bolliger, M. J., Kayser, E. K., Thompson, M. R., Parker, J. S., Cheetham, B. W., Davis, D. C., Sweeney, D. J., Near Rectilinear Halo Orbit Determination with Simulated DSN Observations, AIAA 2020-1700, AIAA Scitech 2020 Forum, Orlando, Florida, 2020, 6 – 10 January.
- [7] Parrish, N. P., Kayser, E., Udupa, S., Parker, J. S., Cheetham, B. W., Davis, D. C., Survey of Ballistic Lunar Transfers to Near Rectilinear Halo Orbit, AAS 19-740, AAS/AIAA Astrodynamics Specialist Conference, Portland, Maine, 2019, 11 – 15 August.
- [8] Gardner, T. et al, CAPSTONE: A CubeSat Pathfinder for the Lunar Gateway Ecosystem, SSC21-II-06, 35<sup>th</sup> Annual Small Satellite Conference, Logan, Utah, 2021, 7 – 12 August.
- [9] Thompson, M.R., Kayser, E., Parker, J.S., Ott, C., Gardner, T., Cheetham, B.W., Navigation Design of the CAPSTONE Mission Near NRHO Insertion AAS/AIAA Astrodynamics Specialist Conference, (2021).
- [10] Thompson, M.R., Forsman, A., Peters, B.C., Ely, T., Sorensen, D., Cheetham, B., Cislunar Navigation Technology Demonstrations on the CAPSTONE Mission, Institute of Navigation International Technical Meeting, (2022).