



7030TDRI-HK

1-1/2" Schedule 40 Testable ABS Half Kit

Project Name: _____

Schedule #


Contractor: _____

Description:

1-1/2" Testable ABS Half Kit, Less Pipe, Less Tee, Less Trim with Upper and Lower Testing Devices
(Trim Kit Sold Separately)




*The "cCSAus Meets UPC" mark means the product conforms to the requirements of the NPC, UPC, IPC and IRC.

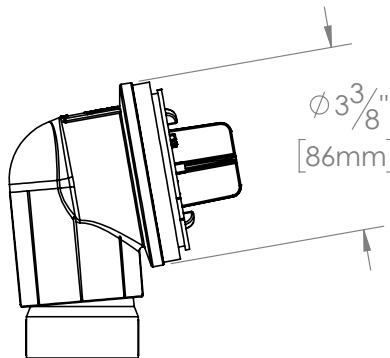

TESTING SPECIFICATIONS

Test Plug Rating	25 PSI - Test Up To Four Floors
Flow Rate	8.25 GPM



Oakville Stamping and Bending Ltd.

2200 Speers Road, Unit C. Oakville, ON. Canada. L6L 2X8.

T. 905.827.0320 or toll free 1.877.314.6040 F. 905.827.6375 or toll free 1.877.827.6040.

All rights reserved. OS&B™ reserves the right to change product specifications and material or discontinue models without notice.

www.osb.ca (Canada) www.osbplumbing.com (USA)