


## 52H-3E Series

### Enclosed Manual Clamps

Destaco enclosed manual and power clamps are designed to meet the rigorous requirements of automotive and sheet metal processing applications, while lasting millions of cycles.

The 52H-3E Series manual clamps are built to withstand the harshest of manufacturing environments and designed to deliver superior clamping power with unparalleled flexibility.

When it comes to holding and positioning work perfectly in place, look no further than Destaco's flexible and robust 52H-3E Series enclosed manual clamps to get the job done.

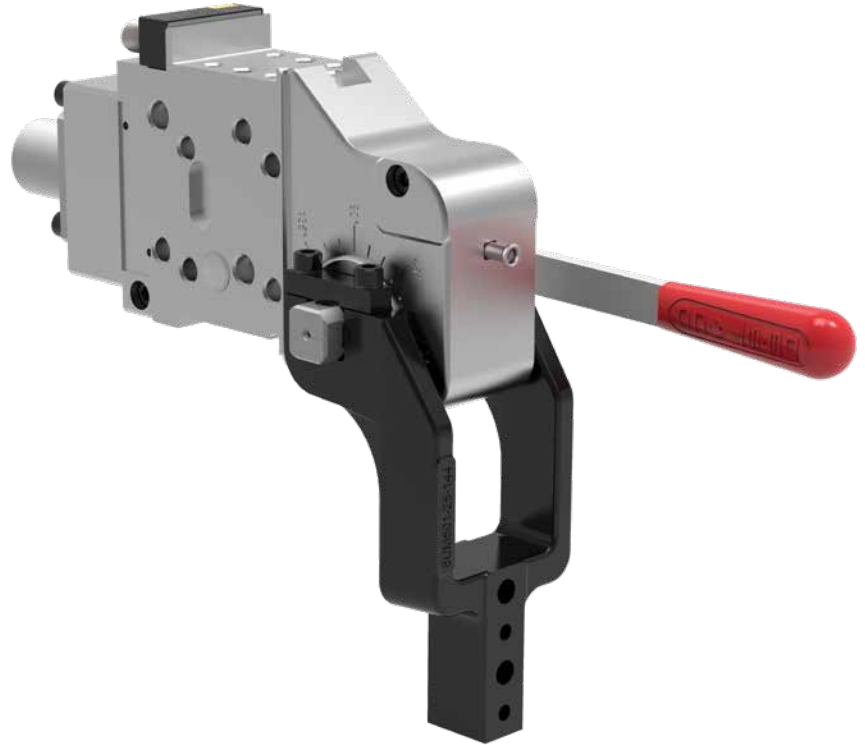

### Product Highlights/Options

- Two sizes available - 50 and 63mm
- Integrated sensor package
- Compact, enclosed aluminum body
- Optional U-Arms and lateral arms available













CLAMPING



HOLD DOWN

### Features, Markets and Applications


 LOW/NO MAINTENANCE	<ul style="list-style-type: none"><li>• Easily adjust arm opening angle with one tool</li><li>• Hand lever is adjustable for better ergonomics</li></ul>	 AUTOMOTIVE	 ASSEMBLY
 PERFORMANCE	<ul style="list-style-type: none"><li>• Infinite arm opening adjustment (up to 135°)</li><li>• Toggle locking mechanism ensure secure clamping</li></ul>	 INDUSTRIAL	 WELDING
 INTERCHANGEABLE	<ul style="list-style-type: none"><li>• Multiple mounting surfaces provide greater flexibility</li><li>• Conform to NAAMS and Euro mounting standards</li><li>• Same mounting pattern and surfaces as 82M3E power clamps</li></ul>	 AEROSTRUCTURE	 FIXTURE/TESTING
		 Consumer Goods CONSUMER GOODS	

## The Most Flexible and Complete Family of Clamps




**50mm**  
Max Holding Torque  
1300 Nm

**63mm**  
Max Holding Torque  
1800 Nm

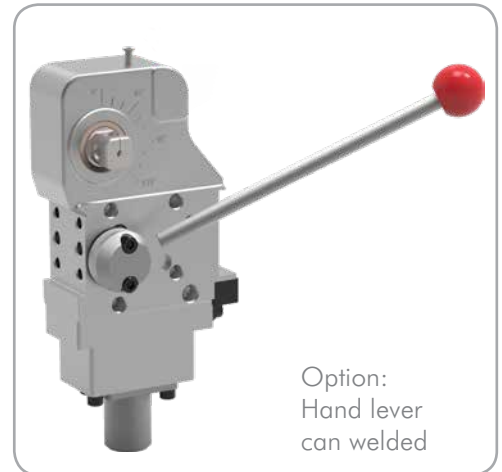

- Hand lever position is adjustable for improved ergonomics.
- Handle can be mounted on the left or right side

## Adjusting the Arm Opening Angle

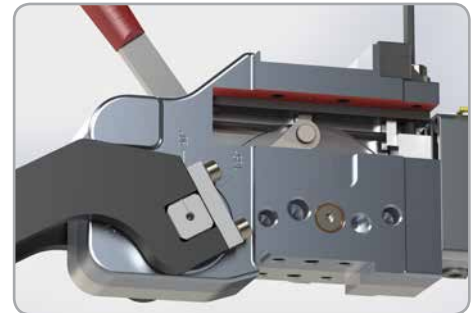



Easily adjust arm opening angle with an M5 Allen wrench.

- Move clamp arm to full open position
- Using Allen wrench, release mechanism (leave Allen wrench in place)
- Move clamp arm to desired opening
- Tighten to 10-15 Nm

Dimensions and technical information are subject to change without notice.

PC\_52H-F\_0119\_US

**CORPORATE HEADQUARTERS**  
 **US**  
+1-888-DESTACO  
+1-248-836-6700  
northamerica@destaco.com

 **DE**  
+49-6171-705-0  
europe@destaco.com  
 **PL**  
+48-506002115  
poland@destaco.com

 **FR**  
+33-4-7354-5001  
france@destaco.com  
 **NL**  
+31-297285332  
benelux@destaco.com

 **UK**  
+44-1902-797980  
uk@destaco.com  
 **CZ**  
+420-603-577-341  
czech@destaco.com

 **SP**  
+34-936361680  
spain@destaco.com  
 **IN**  
+91-80-41123421-426  
india@destaco.com

 **CN**  
+86-21-2411-2678  
china@destaco.com  
 **SG**  
singapore@destaco.com

 **TH**  
+66-2326-0812-6  
asia@destaco.com  
 **CA**  
canada@destaco.com

 **MX**  
mexico@destaco.com