

FN-TRAN-QSFPDD-FR4-OPC

Fortinet® FN-TRAN-QSFPDD-FR4 Compatible TAA 400GBase-FR4 QSFP-DD Transceiver (SMF, 1310nm, 2km, LC, DOM, 0 to 70C)

Features

- QSFP-DD MSA compliant
- 4 CWDM lanes MUX/DEMUX design
- 100G Lambda MSA 400G-FR4 Specification compliant
- Up to 2km transmission on single mode fiber (SMF) with FEC
- Operating Temperature: 0 to 70 Celsius
- 8x53.125Gbps electrical interface
- Data Rate 106.25Gbps (PAM4) per channel
- Maximum power consumption 12W
- Duplex LC connector
- RoHS compliant and Lead -Free
- RoHS Compliant and Lead Free



Applications:

- 400GBase Ethernet
- Access and Enterprise

Product Description

This Fortinet® FN-TRAN-QSFPDD-FR4 compatible QSFP-DD transceiver provides 400GBase-FR4 throughput up to 2km over single-mode fiber (SMF) using a wavelength of 1310nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Fortinet®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Max. | Unit |
|------------------------------------|--------|------|------|------|
| Power Supply Voltage | VCC | -0.5 | 3.6 | V |
| Storage Temperature | Ts | -40 | 85 | °C |
| Case Operating Temperature | Top | 0 | 70 | °C |
| Relative Humidity (non-condensing) | RH | 0 | 85 | % |

Recommended Operating Conditions

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|----------------------------|--------|-------|---------|----------------------|------|-------|
| Operating Case Temperature | TOP | 0 | | 70 | °C | |
| Power Supply Voltage | VCC | 3.135 | 3.3 | 3.465 | V | |
| Data Rate, each Lane | | | 26.5625 | | GBd | PAM4 |
| Data Rate Accuracy | | -100 | | 100 | ppm | |
| Pre-FEC Bit Error Ratio | | | | 2.4×10^{-4} | | |
| Post-FEC Bit Error Ratio | | | | 1×10^{-12} | | 1 |
| Link Distance | D | 0.5 | | 2000 | m | 2 |

Notes:

1. FEC provided by host system.
2. FEC required on host system to support maximum distance.

Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|--|-----------------|----------------------------------|-------|------|------|-------|
| Power Consumption | | | | 12 | W | |
| Supply Current | I _{cc} | | | 3.64 | A | |
| Transceiver Power-on Initialization Time | | | | 2000 | ms | 1 |
| Transmitter (each lane) | | | | | | |
| Signaling Rate, each Lane | TP1 | 26.5625 ± 100 ppm | | | GBd | |
| Differential pk-pk Input Voltage Tolerance | TP1a | 900 | | | mVpp | 1 |
| Differential Termination Mismatch | TP1 | | | 10 | % | |
| Differential Input Return Loss | TP1 | IEEE 802.3-2015 Equation (83E-5) | | | dB | |
| Differential to Common Mode Input Return Loss | TP1 | IEEE 802.3-2015 Equation (83E-6) | | | dB | |
| Module Stressed Input Test | TP1a | See IEEE 802.3bs 120E.3.4.1 | | | | 2 |
| Single-ended Voltage Tolerance Range (Min) | TP1a | -0.4 to 3.3 | | | V | |
| DC Common Mode Input Voltage | TP1 | -350 | | 2850 | mV | 3 |
| Receiver (each lane) | | | | | | |
| Signaling Rate, each lane | TP4 | 26.5625 ± 100 ppm | | | GBd | |
| Differential Peak-to-Peak Output Voltage | TP4 | | | 900 | mVpp | |
| AC Common Mode Output Voltage, RMS | TP4 | | | 17.5 | mV | |
| Differential Termination Mismatch | TP4 | | | 10 | % | |
| Differential Output Return Loss | TP4 | IEEE 802.3-2015 Equation (83E-2) | | | | |
| Common to Differential Mode Conversion Return Loss | TP4 | IEEE 802.3-2015 Equation (83E-3) | | | | |
| Transition Time, 20% to 80% | TP4 | 9.5 | | | ps | |
| Near-end Eye Symmetry Mask Width (ESMW) | TP4 | | 0.265 | | UI | |
| Near-end Eye Height, Differential | TP4 | 70 | | | mV | |
| Far-end Eye Symmetry Mask Width (ESMW) | TP4 | | 0.2 | | UI | |
| Far-end Eye Height, Differential | TP4 | 30 | | | mV | |
| Far-end Pre-cursor ISI Ratio | TP4 | -4.5 | | 2.5 | % | |
| Common Mode Output Voltage (V _{cm}) | TP4 | -350 | | 2850 | mV | 3 |

Notes:

1. With the exception to IEEE 802.3bs 120E.3.1.2 that the pattern is PRBS31Q or scrambled idle.
2. Meets BER specified in IEEE 802.3bs 120E.1.1.
3. DC common mode voltage generated by the host. Specification includes effects of ground offset voltage.


Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|--|--------|------------------|------|--------|-------|-------------------|
| Lane Wavelength | L0 | 1264.5 | 1271 | 1277.5 | nm | |
| | L1 | 1284.5 | 1291 | 1297.5 | | |
| | L2 | 1304.5 | 1311 | 1317.5 | | |
| | L3 | 1324.5 | 1331 | 1337.5 | | |
| Transmitter | | | | | | |
| Data Rate, each Lane | | 53.125 ± 100 ppm | | | GBd | |
| Modulation Format | | PAM4 | | | | |
| Side-mode Suppression Ratio | SMSR | 30 | | | dB | Modulated |
| Total Average Launch Power | PT | | | 9.3 | dBm | |
| Average Launch Power, each Lane | PAVG | -3.3 | | 3.5 | dBm | 1 |
| Outer Optical Modulation Amplitude (OMA _{outer}), each Lane | POMA | -0.3 | | 3.7 | dBm | 2 |
| Launch Power in OMA _{outer} minus TDECQ, each Lane | | -1.7 | | | dB | For ER ≥4.5dB |
| Launch Power in OMA _{outer} minus TDECQ, each Lane | | -1.6 | | | dB | For ER <4.5dB |
| Transmitter and Dispersion Eye Closer for PAM4, each Lane | TDECQ | | | 3.4 | dB | |
| Extinction Ratio | ER | 3.5 | | | dB | |
| Difference in Launch Power between any Two Lanes (OMA _{outer}) | | | | 4 | dB | |
| RIN _{17.1} OMA | RIN | | | -136 | dB/Hz | |
| Optical Return Loss Tolerance | TOL | | | 17.1 | dB | |
| Transmitter Reflectance | TR | | | -26 | dB | |
| Average Launch Power of OFF Transmitter, each Lane | Poff | | | -20 | dBm | |
| Receiver | | | | | | |
| Data Rate, each Lane | | 53.125 ± 100 ppm | | | GBd | |
| Modulation Format | | PAM4 | | | | |
| Damage Threshold, each Lane | THd | 4.5 | | | dBm | 3 |
| Average Receive Power, each Lane | | -7.3 | | 3.5 | dBm | 4 |
| Receive Power (OMA _{outer}), each Lane | | | | 3.7 | dBm | |
| Difference in Receiver Power between any Two Lanes (OMA _{outer}) | | | | 4.1 | dB | |
| Receiver Sensitivity (OMA _{outer}), each Lane | SEN | | | -5.0 | dBm | For BER of 2.4E-4 |
| Stressed Receiver Sensitivity (OMA _{outer}), each Lane | SRS | See Figure Below | | | dBm | 5 |
| Receiver Reflectance | RR | | | -26 | dB | |
| LOS Assert | LOSA | -30 | | | dBm | |
| LOS De-assert | LOSD | | | -12 | dBm | |
| LOS Hysteresis | LOSH | 0.5 | | | dB | |

| Stressed Conditions for Stress Receiver Sensitivity (Note 6) | | | | | | |
|--|--|-----|-----|-----|-----|--|
| Stressed Eye Closure for PAM4 (SECQ), Lane under Test | | 0.9 | | 3.4 | dB | |
| OMA _{outer} of each Aggressor Lane | | | 1.5 | | dBm | |

Notes:

1. Average launch power, each lane (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. Even if the TDECQ < 1.4 dB for an extinction ratio of ≥ 4.5 dB or TDECQ < 1.3 dB for an extinction ratio of < 4.5 dB, the OMA_{outer} (min) must exceed the minimum value specified here.
3. The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level.
4. Average receive power, each lane (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.
5. Measured with conformance test signal for BER = 2.4×10^{-4} . A compliant receiver shall have stressed receiver sensitivity (OMA_{outer}), each lane values below the mask of the figure below, for SECQ values between 0.9 and 3.4 dB.
6. These test conditions are for measuring stressed receiver sensitivity. They are not characteristics of the receiver.

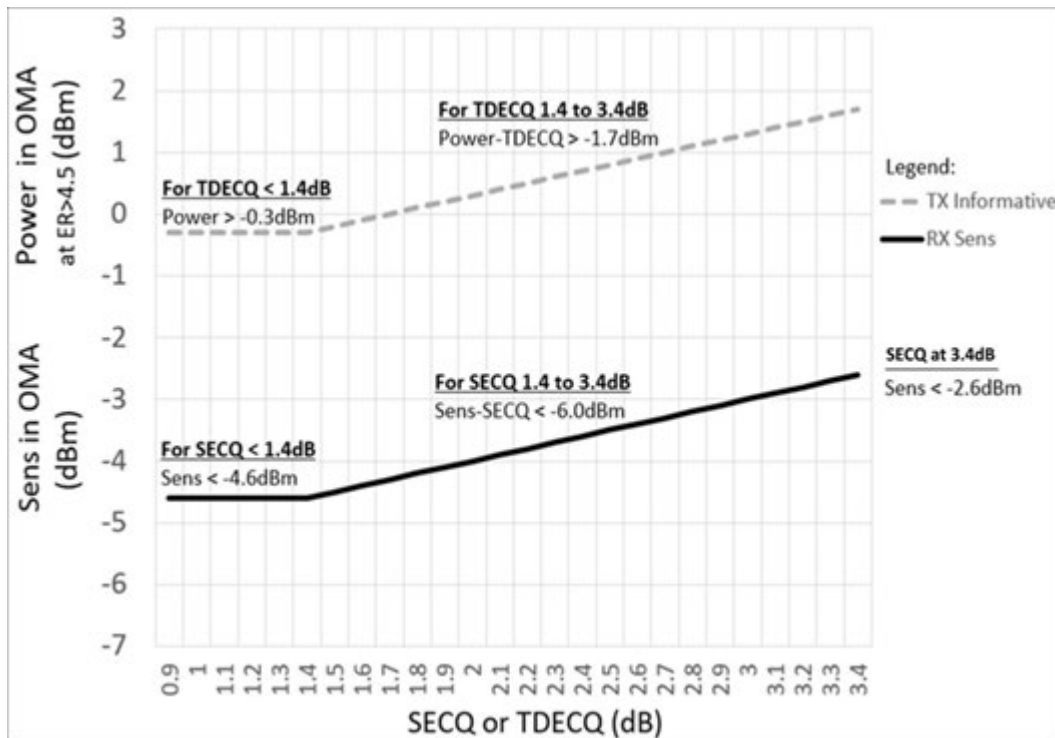


Pin Descriptions


| Pin | Logic | Symbol | Name/Descriptions | Plug Sequence |
|-----|-------------|----------|---|---------------|
| 1 | | GND | Ground | 1B |
| 2 | CML-I | Tx2n | Transmitter Inverted Data Input | 3B |
| 3 | CML-I | Tx2p | Transmitter Non-Inverted Data Input | 3B |
| 4 | | GND | Ground | 1B |
| 5 | CML-I | Tx4n | Transmitter Inverted Data Input | 3B |
| 6 | CML-I | Tx4p | Transmitter Non-Inverted Data Input | 3B |
| 7 | | GND | Ground | 1B |
| 8 | LVTTL-I | ModSelL | Module Select | 3B |
| 9 | LVTTL-I | ResetL | Module Reset | 3B |
| 10 | | VccRx | +3.3V Power Supply Receiver | 2B |
| 11 | LVC MOS-I/O | SCL | 2-wire serial interface clock | 3B |
| 12 | LVC MOS-I/O | SDA | 2-wire serial interface data | 3B |
| 13 | | GND | Ground | 1B |
| 14 | CML-O | Rx3p | Receiver Non-Inverted Data Output | 3B |
| 15 | CML-O | Rx3n | Receiver Inverted Data Output | 3B |
| 16 | GND | Ground | 1B | |
| 17 | CML-O | Rx1p | Receiver Non-Inverted Data Output | 3B |
| 18 | CML-O | Rx1n | Receiver Inverted Data Output | 3B |
| 19 | | GND | Ground | 1B |
| 20 | | GND | Ground | 1B |
| 21 | CML-O | Rx2n | Receiver Inverted Data Output | 3B |
| 22 | CML-O | Rx2p | Receiver Non-Inverted Data Output | 3B |
| 23 | | GND | Ground | 1B |
| 24 | CML-O | Rx4n | Receiver Inverted Data Output | 3B |
| 25 | CML-O | Rx4p | Receiver Non-Inverted Data Output | 3B |
| 26 | | GND | Ground | 1B |
| 27 | LVTTL-O | ModPrsL | Module Present | 3B |
| 28 | LVTTL-O | IntL | Interrupt | 3B |
| 29 | | VccTx | +3.3V Power supply transmitter | 2B |
| 30 | | Vcc1 | +3.3V Power supply | 2B |
| 31 | LVTTL-I | InitMode | Initialization mode; In legacy QSFP applications, the InitMode pad is called LPMODE | 3B |
| 32 | | GND | Ground | 1B |
| 33 | CML-I | Tx3p | Transmitter Non-Inverted Data Input | 3B |
| 34 | CML-I | Tx3n | Transmitter Inverted Data Input | 3B |
| 35 | | GND | Ground | 1B |
| 36 | CML-I | Tx1p | Transmitter Non-Inverted Data Input | 3B |
| 37 | CML-I | Tx1n | Transmitter Inverted Data Input | 3B |
| 38 | | GND | Ground | 1B |
| 39 | | GND | Ground | 1A |
| 40 | CML-I | Tx6n | Transmitter Inverted Data Input | 3A |

| | | | | |
|----|-------|----------|-------------------------------------|----|
| 41 | CML-I | Tx6p | Transmitter Non-Inverted Data Input | 3A |
| 42 | | GND | Ground | 1A |
| 43 | CML-I | Tx8n | Transmitter Inverted Data Input | 3A |
| 44 | CML-I | Tx8p | Transmitter Non-Inverted Data Input | 3A |
| 45 | | GND | Ground | 1A |
| 46 | | Reserved | For future use | 3A |
| 47 | | VS1 | Module Vendor Specific 1 | 3A |
| 48 | | VccRx1 | 3.3V Power Supply | 2A |
| 49 | | VS2 | Module Vendor Specific 2 | 3A |
| 50 | | VS3 | Module Vendor Specific 3 | 3A |
| 51 | | GND | Ground | 1A |
| 52 | CML-O | Rx7p | Receiver Non-Inverted Data Output | 3A |
| 53 | CML-O | Rx7n | Receiver Inverted Data Output | 3A |
| 54 | | GND | Ground | 1A |
| 55 | CML-O | Rx5p | Receiver Non-Inverted Data Output | 3A |
| 56 | CML-O | Rx5n | Receiver Inverted Data Output | 3A |
| 57 | | GND | Ground | 1A |
| 58 | | GND | Ground | 1A |
| 59 | CML-O | Rx6n | Receiver Inverted Data Output | 3A |
| 60 | CML-O | Rx6p | Receiver Non-Inverted Data Output | 3A |
| 61 | | GND | Ground | 1A |
| 62 | CML-O | Rx8n | Receiver Inverted Data Output | 3A |
| 63 | CML-O | Rx8p | Receiver Non-Inverted Data Output | 3A |
| 67 | | GND | Ground | 1A |
| 68 | | NC | No Connect | 3A |
| 69 | | Reserved | For future use | 3A |
| 70 | | VccTx1 | 3.3V Power Supply | 2A |
| 71 | | Vcc2 | 3.3V Power Supply | 2A |
| 72 | | Reserved | For Future Use | 3A |
| 73 | | GND | Ground | 1A |
| 74 | CML-I | Tx7p | Transmitter Non-Inverted Data Input | 3A |
| 75 | CML-I | Tx7n | Transmitter Inverted Data Input | 3A |
| 76 | | GND | Ground | 1A |

MSA Compliant Connector

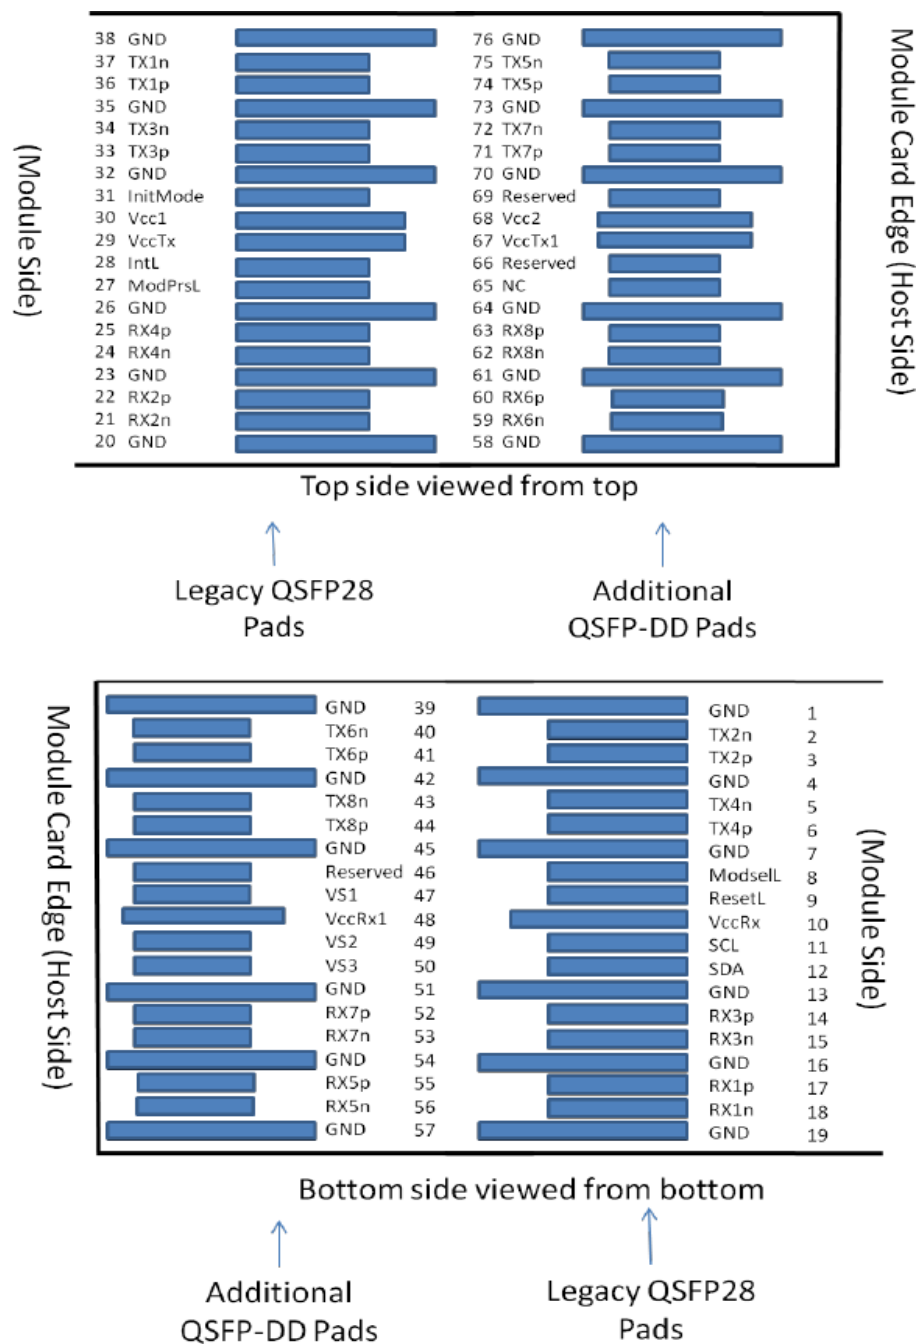

Recommended Power Supply Filter

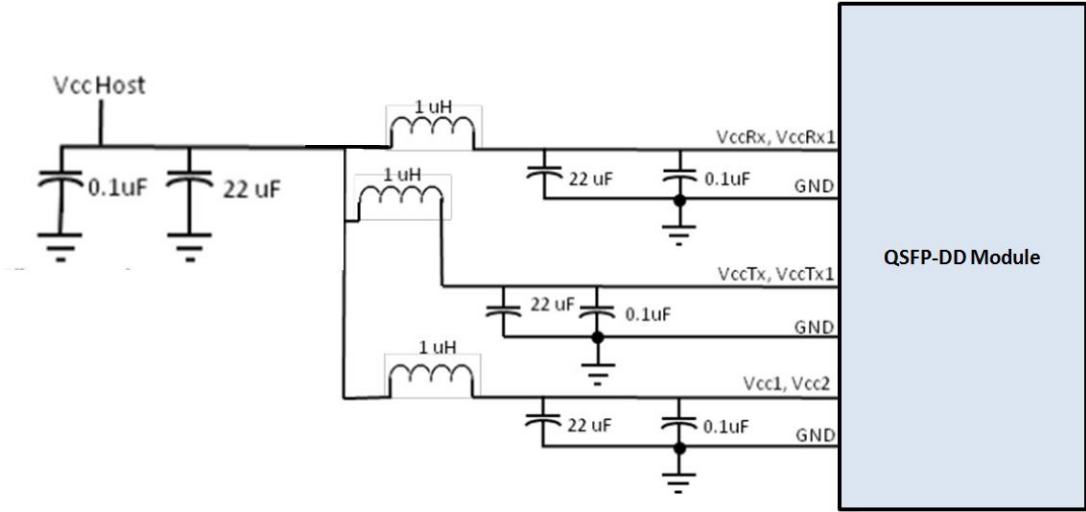

Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the normal operating conditions unless otherwise specified.

| Parameter | Symbol | Min | Max | Units | Notes |
|---|--------------|------|-----|-------|----------------------------------|
| Temperature monitor absolute error | DMI_Temp | -3 | 3 | degC | Over operating temperature range |
| Supply voltage monitor absolute error | DMI_VCC | -0.1 | 0.1 | V | Over full operating range |
| Channel RX power monitor absolute error | DMI_RX_Ch | -2 | 2 | dB | 1 |
| Channel Bias current monitor | DMI_Ibias_Ch | -10% | 10% | mA | |
| Channel TX power monitor absolute error | DMI_TX_Ch | -2 | 2 | dB | 1 |

Notes:

1. Due to measurement accuracy of different single mode fibers, there could be an additional +/- 1 dB fluctuation, or a +/- 3 dB total accuracy.

Mechanical Specifications

