
## **Ablaze Kent Frameless Mirror**

## Round 18mm Bevel Edge Mirror with Demister



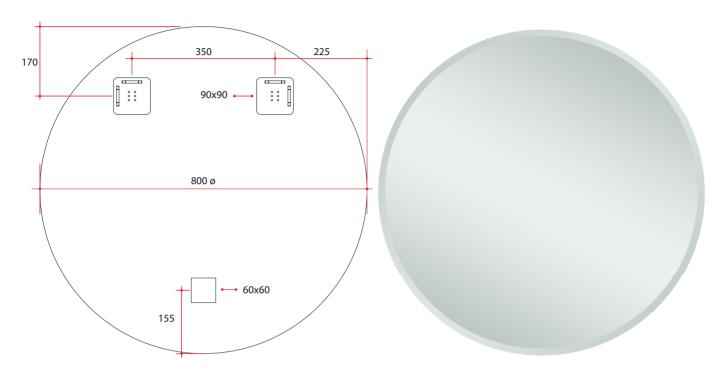

Note: All dimensions are in millimetres (mm)

The depth of the mirror is 5mm, the space between the back of the mirror and the wall due to the hangers is 9mm making the total depth 14mm.

Stock Code	Mirror Size (mm)	Shape	Edge
KR8080HND	800 ø x 14	Round	18mm Bevel



5mm thick mirror



Safety backing film



Copper-free mirror



Two years warranty



Hangers for easy installation



Includes demister

**PLEASE NOTE:** This product includes a mirror and Thermomirror demister. These are supplied as separate parts and the demister will need to be adhered to the back of the mirror prior to installation of the mirror. For details on the demister, please see next page.


Mirrors will need to be installed in accordance with the Installation Guide. Ablaze does not take responsibility for incorrect installation of these mirrors. Specifications are for information purposes only. Whilst every effort has been made to ensure the product specifications are accurate, due to continuing product development and improvement, the specifications are subject to change. Specifications can be used to rough in and for timber supports in the wall however, we recommend no holes are drilled without having the product on site or verifying the details with the manufacturer. Thermogroup cannot be held liable or responsible for errors due to updated specifications.



## **Thermomirror Mirror Demister**

Ultra-thin Demister Pad for use on Bathroom Mirrors



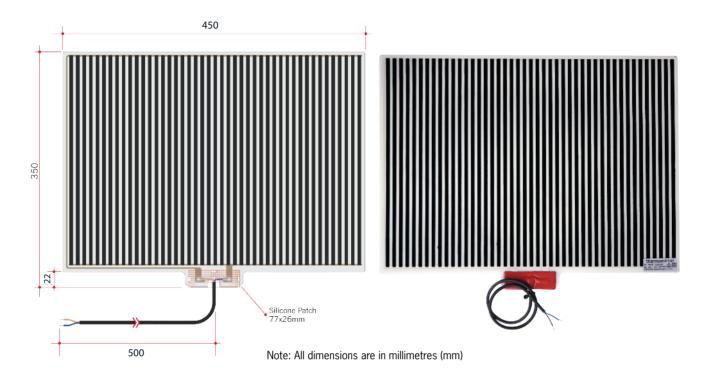

Stock Code	Size (mm)	) H	leat Output (W)	Voltage - Frequency
TM3545	350 x 450		38	220 - 240V 50Hz
10 Ten year	240V Hardwiring only	IP64	U.S. O.6MM  ↑  Heating pad	5.5MM Connection
warranty	marawing only	in bathrooms	thickness	thickness
35-40°C		< 500MM →		NADE IN  SUROPE
Max temperature	Fully self-adhesive	Wiring lead	Double insulated	Made in Europe

Thermomirror demisters must be installed by a qualified electrican.

The demister cannot be cut, pierced or modified in anyway.

