

**PORT OF TACOMA  
TACOMA, WASHINGTON  
WUT ADMIN & MARINE BUILDING ROOF PROJECT**

**PROJECT NO. 201111.01  
CONTRACT NO. 071399**


**Thais Howard, PE  
Director, Engineering**

**Hughes Wike, PE  
Project Manager**

**END OF SECTION**

The undersigned Engineer of Record hereby certifies that the Technical Specifications for the following portions of this project were written by me, or under my direct supervision, and that I am duly registered under the laws of the State of Washington, and hereby affix my Professional Seal and signature.

Those Sections prepared under my direct supervision and being certified by my seal and signature below are as follows:

<u>SEAL &amp; SIGNATURE</u>	<u>SECTION(S)</u>
	07 53 00 Single-Ply Membrane Roofing (PVC) 07 62 00 Sheet Metal Flashings 07 90 00 Sealants 10 81 13 Grid Wire Bird Deterrent System

**END OF SECTION**

## **PROCUREMENT AND CONTRACTING REQUIREMENTS**

### **DIVISION 00 -- PROCUREMENT AND CONTRACTING REQUIREMENTS**

- 00 01 01 - Project Title Page
- 00 01 07 - Seals Page
- 00 01 10 - Table of Contents
- 00 01 15 - List of Drawing Sheets
- 00 11 13 - Advertisement for Bids
- 00 21 00 - Instructions to Bidders
- 00 26 00 - Substitution Procedures
- 00 31 26 - Existing Hazardous Material Information
- 00 41 00 - Bid Form
- 00 43 13 - Bid Security Form
- 00 45 13 - Responsibility Detail Form
- 00 52 00 - Agreement Form
- 00 61 13.13 - Performance Bond
- 00 61 13.16 - Payment Bond
- 00 61 23 - Retainage Bond
- 00 61 23.13 - Retainage Escrow Agreement
- 00 72 00 - General Conditions
- 00 73 16 - Insurance Requirements
- 00 73 46 - Washington State Prevailing Wage Rates
- 00 73 63 - Security Requirements

## **SPECIFICATIONS**

### **DIVISION 01 -- GENERAL REQUIREMENTS**

- 01 10 00 - Summary
- 01 14 00 - Work Restrictions
- 01 20 00 - Price and Payment Procedures
- 01 26 00 - Change Management Procedures
- 01 29 73 - Schedule of Values
- 01 30 00 - Administrative Requirements
- 01 32 16 - Construction Progress Schedule
- 01 33 00 - Submittal Procedures
- 01 35 29 - Health, Safety, and Emergency Response Procedures
- 01 35 43.13 - Hazardous Materials Handling Procedure

- 01 35 47 - Air and Noise Control Procedures
- 01 41 00 - Regulatory Requirements
- 01 42 19 - Reference Standards
- 01 45 00 - Quality Control
- 01 50 00 - Temporary Facilities and Controls
- 01 55 00 - Vehicular Access and Parking
- 01 57 13 - TESC and Project SWPPP
- 01 60 00 - Product Requirements
- 01 71 00 - Examination and Preparation
- 01 74 13 - Construction Cleaning
- 01 77 00 - Closeout Procedures
- 01 78 23 - Operation and Maintenance Manuals
- DIVISION 07 -- THERMAL AND MOISTURE PROTECTION
- 07 53 00 - Single-Ply Membrane Roofing (PVC)
- 07 62 00 - Sheet Metal Flashings
- 07 90 00 - Sealants
- DIVISION 10 -- SPECIALTIES
- 10 81 13 - Gridded Wire Seagull Deterrent System

APPENDICES

- Appendix A - Port of Tacoma Construction SWPPP Short Form
- Appendix B - SEPA Exemption
- Appendix C - Shoreline Substantial Development Permit Exemption
- Appendix D - Phase 1 Construction Restart COVID-19 Job Site Requirements

**END OF SECTION**

**PART 1 - GENERAL**

**1.01 SUMMARY**

A. Contract Drawings: The following drawings are a part of the Contract Documents:

G1.1	Cover Sheet
G1.2	General Notes and Symbols
G1.3	Site Plan
R1.1	Admin and Marine Buildings - Photo Reference Plans
R2.1	Admin Building - Photo References
R2.2	Marine Building - Photo References
A1.1	Admin Building - Roof Plan
A1.2	Admin Building - Roof Plans
A1.3	Marine Building - Roof Plan
A1.4	Admin and Marine Buildings - Bird Deterrent Plans
A2.1	Roof Details

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **WUT ADMIN & MARINE BUILDING ROOF PROJECT**

**PROJECT NO. 201111.01 | CONTRACT NO. 071399**

- Scope of Work:** The Work required for this Project includes:  
The recovering of existing Hypalon membrane roofs with new polyvinyl chloride (PVC) membranes and installation of new bird deterrent systems.
- Bid Estimate:** Estimated cost range is \$220,000 to \$255,000,  
plus Washington State Sales Tax (WSST).
- Sealed Bid Date/  
Time/Location:** Bids will be received at the Front Reception Desk, Port  
Administration Office, One Sitcum Plaza, Tacoma, Washington  
98421 until **2:00 P.M. on March 3, 2021**, at which time they will be publicly  
opened and read aloud and the apparent low bid will be determined.
- Pre-Bid Conference and Site Tour:**  
A pre-Bid conference and site visit have been set for February 24,  
2021 at 11:30am. The site visit will convene at the Port's  
Administrative building, located at One Sitcum Plaza and will travel to  
the site after a brief meeting. The following Personal Protective  
Equipment is required for the site visit: sturdy shoes, reflective vest,  
and hardhat.
- Due to the current COVID-19 concerns, there will be no carpooling  
personnel in Port vehicles during the site visit. Contractors will be  
escorted in their own vehicles on the terminal. Everyone attending  
must bring identification and those with TWIC cards are encouraged to  
bring them.
- Attendees will be required to sign a Release and Acceptance of  
Responsibility and Acknowledgement of Risks Form prior to entering  
the site and shall provide their own Personal Protection Equipment  
(PPE) as required above.
- Bid Security:** Each Bid must be accompanied by a Bid security in an amount  
equal to five (5) percent of the Base Bid in a form allowed by the Instructions  
to Bidders.
- Contact  
Information:** Any questions to the Port may be emailed to  
procurement@portoftacoma.com. No oral responses will be binding  
by the Port.
- Questions will not be accepted after seven (7) days prior to the Bid Date.

**Bidding  
Documents:**

Plans, Specifications, Addenda, and Plan Holders List for this Project are available on-line through The Port of Tacoma's Website [www.portoftacoma.com](http://www.portoftacoma.com). Click on "Contracts," "Procurement," and then the Procurement Number 071399. Bidders must subscribe to the Holder's List on the right hand side of the screen in order to receive automatic email notification of future addenda and to be placed on the Holder's List.

Contact [procurement@portoftacoma.com](mailto:procurement@portoftacoma.com) with questions. Holder's Lists will be updated regularly. Additional Instructions available in Section 00 21 00 - Instructions to Bidders.

**Public Works  
Training  
Requirements:**

Effective July 1, 2019, all businesses are required to have training before bidding on public works projects and prevailing wage under RCW 39.04.359 and RCW 39.12, or is on the list of exempt businesses maintained by the Department of Labor and Industries. The bidder must designate a person or persons to be trained on these requirements. The training will be provided by the Department of Labor and Industries or by a training provider whose curriculum is approved by the Department of Labor and Industries.

Please refer to Labor and Industries' web site ([https://www.lni.wa.gov/TradesLicensing/PrevWage/Contractors/Training.asp?utm\\_medium=email&utm\\_source=govdelivery](https://www.lni.wa.gov/TradesLicensing/PrevWage/Contractors/Training.asp?utm_medium=email&utm_source=govdelivery)) for more information and training dates, requirements, and exemptions. Failure to attend this training could result in a determination of "not responsible" and the bidder not being awarded a public works contract.

**END OF SECTION**

## **PART 1 - SUMMARY**

### **1.01 DEFINITIONS**

All definitions set forth in the Agreement, the General Conditions of the Contract for Construction, and in other Contract Documents are applicable to the Bidding Documents.

- A. "Addenda" are written or graphic instruments issued prior to the execution of the Contract which modify or interpret the Bidding Documents by additions, deletions, clarifications, or corrections. The contents of an Addendum are issued in no particular order and therefore should be carefully and completely reviewed.
- B. An "Apprentice" is a worker for whom an apprenticeship agreement has been registered and approved by the Washington State Apprenticeship and Training Council (RCW 49.04 and WAC 296-05).
- C. "Award" means the formal decision by the Port of Tacoma ("Port") notifying a Responsible Bidder with the lowest responsive Bid of the Port's acceptance of their Bid and intent to enter into a Contract with the Bidder.
- D. The "Award Requirements" include the statutory requirements as a condition precedent to Award.
- E. The "Base Bid" is the sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents as the base to which Work may be added or from which Work may be deleted for sums stated in Alternate Bids.
- F. A "Bid" is a complete and properly signed proposal to do the Work, submitted in accordance with the Bidding Documents, for the sums therein stipulated and supported by any data called for by the Bidding Documents.
- G. The "Bid Date" is the day and hour specified in the Bidding Documents, as may be changed through an Addendum, by which Bidders are required to submit Bids to the Port.
- H. The "Bid Form" is the form(s) included with the Bidding Documents, with Specification Section 00 41 00, through which a Bidder submits a Bid.
- I. A "Bidder" is a person or entity who submits a Bid.
- J. The "Bidding Documents" include the Advertisement or Invitation to Bid, Instructions to Bidders, the Bid Form, any other sample bidding and contract forms, including those provided by reference, the Bid security, and the proposed Contract Documents, including any Addenda issued prior to the Bid Date.
- K. The "Contract Documents" proposed for the Work consist of the Agreement, the General Conditions of the Contract (as well as any Supplemental, Special, or other conditions included in the Project Manual), the Drawings, the Specifications, and all Addenda issued prior to, and all modifications issued after, execution of the Contract.
- L. A "Sub-Bidder" is a person or entity of any tier who submits a bid or proposal to or through the Bidder for materials, equipment or labor for a portion of the Work.

### **1.02 BIDDER'S REPRESENTATIONS**

By making its Bid, each Bidder represents that:

- A. **BIDDING DOCUMENTS.** The Bidder has read and understands the Bidding Documents, and its Bid is made in accordance with them.



- B. PRE-BID MEETING. The Bidder has attended pre-Bid meeting(s) required by the Bidding Documents. Attendance at a mandatory meeting or training session means that, in the sole opinion of the Port, a Project representative of a Bidder has attended all or substantially all of such meeting or session.
- C. BASIS. Its Bid is based upon the materials, systems, services, and equipment required by the Bidding Documents, and is made without exception.
- D. EXAMINATION. The Bidder has carefully examined and understands the Bidding Documents, the Contract Documents including, but not limited to, any liquidated damages, insurance provisions, and the Project site, including any existing buildings, it has familiarized itself with the local conditions under which the Work is to be performed, has correlated its observations with the requirements of the proposed Contract Documents, and it has satisfied itself as to the nature, location, character, quality, and quantity of the Work, the labor, materials, equipment, goods, supplies, work, services, and other items to be furnished, and all other requirements of the Contract Documents. The Bidder has also satisfied itself as to the conditions and other matters that may be encountered at the Project site or that may affect performance of the Work or the cost or difficulty thereof, including, but not limited to, those conditions and matters affecting transportation, access, disposal, handling and storage of materials, equipment and other items; availability and quality of labor, water, electric power, and utilities; availability and condition of roads; climatic conditions and seasons; physical conditions at the Project site and the surrounding locality; topography and ground surface conditions; and equipment and facilities needed preliminary to, and at all times during, the performance of the Work. The failure of the Bidder to fully acquaint itself with any applicable condition or matter shall not in any way relieve the Bidder from the responsibility for performing the Work in accordance with, and for the Contract Sum and within the Contract Time provided for in, the Contract Documents.
- E. PROJECT MANUAL. The Bidder has checked its copies of the Project Manual (if any) with the table of contents bound therein to ensure the Project Manual is complete.
- F. SEPARATE WORK. The Bidder has examined and coordinated all Drawings, Contract Documents, and Specifications with any other contracts to be awarded separately from, but in connection with, the Work being Bid upon, so that the Bidder is fully informed as to conditions affecting the Work under the Contract being Bid upon.
- G. LICENSE REQUIREMENTS. The Bidders and Sub-Bidders are registered and hold all licenses required by the laws of Washington, including a certificate of registration in compliance with RCW 18.27, for the performance of the Work specified in the Contract Documents.
- H. CERTIFICATION. The Bidder verifies under penalty of perjury that the Bidder has not have been determined by a final and binding citation and notice of assessment issued by the Department of Labor and Industries or through a civil judgment entered by a court of limited or general jurisdiction to have willfully violated, as defined in RCW 49.48.082, any provision of Chapters 49.46, 49.48, or 49.52 RCW within the three (3) year period immediately preceding the Bid Date.
- I. NO EXCEPTIONS. Bids must be based upon the materials, systems, and equipment described and required by the Bidding Documents, without exception.

### 1.03 BIDDING DOCUMENTS

#### A. COPIES

1. Bidders may obtain complete sets of the Bidding Documents from The Port of Tacoma's Website [www.portoftacoma.com](http://www.portoftacoma.com). Click on "Contracts" then "Procurement."

2. Complete Sets. Bidders shall use complete sets of Bidding Documents in preparing Bids and are solely responsible for obtaining updated information. The Port does not assume any responsibility for errors or misinterpretations resulting from the use of incomplete and/or superseded sets of Bidding Documents.
3. Conditions. The Port makes copies of the Bidding Documents available only for the purpose of obtaining Bids on the Work and does not confer a license or grant permission for any other use.
4. Legible Documents. To the extent any Drawings, Specifications, or other Bidding Documents are not legible, it is the Bidder's responsibility to obtain legible documents.

**B. INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS**

1. Format. The Contract Documents are divided into parts, divisions, and sections for convenient organization and reference. Generally, there has been no attempt to divide the Specification sections into Work performed by the various building trades, any Work by separate contractors, or any Work required for separate facilities in, or phases of the Project.
2. Duty to Notify. Bidders shall promptly notify the Port in writing of any ambiguity, inconsistency, or error that they may discover upon examination of the Bidding Documents or of the site and local conditions.
3. Products and Installation. All Bidders shall thoroughly familiarize themselves with specified products and installation procedures and submit to the Port any objections (in writing) no later than seven (7) days prior to the Bid Date. The submittal of the Bid constitutes acceptance of products and procedures specified as sufficient, adequate, and satisfactory for completion of the Contract.
4. Written Request. Bidders requiring clarification or interpretation of the Bidding Documents shall make a written email request to [procurement@portoftacoma.com](mailto:procurement@portoftacoma.com) at least seven (7) days prior to the Bid Date.
5. Request to Modify Responsibility Criteria. No later than seven (7) days prior to the Bid Date, a potential Bidder may request in writing that the Port modify the Responsibility Criteria. The Port will evaluate the information submitted by the potential Bidder and respond before the Bid Date. If the evaluation results in a change of the Criteria, the Port will issue an Addendum identifying the new Criteria.
6. Addenda. The Bidder shall not rely on oral information provided at any pre-Bid meetings or during site visits. Verbal statements made by representatives of the Port are for informational purposes only. Any interpretation, correction, or change of the Bidding Documents will be made solely by written Addendum. Interpretations, corrections, or changes of the Bidding Documents made in any manner other than by written Addendum, including but not limited to, oral statements will not be binding, and Bidders shall not rely upon such statements, interpretations, corrections, or changes. The Port is not responsible for explanations or interpretations of the Bidding Documents other than in a written Addendum.
7. Site Visits. Any site visits are provided as a courtesy to potential Bidders to assist them in becoming familiar with the Project site conditions. However, only the Bidding Documents, including any issued Addenda, may be relied upon by Bidders.
8. Singular References. Reference in the singular to an article, device, or piece of equipment shall include as many of such articles, devices, or pieces as are indicated in the Contract Documents or as are required to complete the installation.

9. Utilities and Runs. The Bidder should assume that the exact locations of any underground or hidden utilities, underground fuel tanks, and plumbing and electrical runs may be somewhat different from any location indicated in the surveys or Contract Documents.

C. SUBSTITUTIONS

1. For substitutions during bidding, refer to Section 00 26 00 – Substitution Procedures.

D. ADDENDA

1. Distribution. All Addenda will be written and will be made available on the Port's website or any other source specified by the Port for the Project.
2. Copies. Copies of Addenda will be made available for inspection wherever Bidding Documents are on file for that purpose.
3. Verification and Acknowledgment of Receipt. Prior to submitting a Bid, each Bidder shall ascertain that it has received all Addenda issued. Each Bidder shall acknowledge its receipt and consideration of all Addenda in its Bid.

1.04 BIDDING PROCEDURE

A. FORM AND STYLE OF BIDS

1. Form. Bids (including required attachments) shall be submitted on forms identical to the Bid Form included with the Bidding Documents. No oral, email, or telephonic responses or modifications will be considered.
2. Entries on the Bid Form. All blanks on the Bid Form shall be filled in by typewriter, printer, or manually in ink.
3. Figures. All sums shall be expressed in figures, not words. Portions of the Bid Form may require the addition or multiplication of component bids to a total or the identification of component amounts within a total. In case of discrepancy between unit prices listed and their sum(s), the unit prices listed shall govern (rather than the sum).
4. Initial Changes. Any interlineation, alteration, or erasure shall be initialed by an authorized representative of the Bidder.
5. Bid Breakdown. The Bid Form may contain, for the Port's accounting purposes only, a breakdown of some or all of the components included in the Base Bid.
  - a. For lump-sum Bids, the total Contract Sum shall be submitted.
  - b. For unit-price Bids, a price shall be submitted for each item of the Work, an extension thereof, and, if requested, the total Contract Sum.
6. No Conditions. The Bidder shall make no conditions or stipulations on the Bid Form, nor qualify its Bid in any manner.
7. Identity of Bidder. The Bidder shall include in the specified location on the Bid Form, the legal name of the Bidder and, if requested, a description of the Bidder as a sole proprietor, a partnership, a joint venture, a corporation, or another described form of legal entity. The Bid shall be signed by the person or persons legally authorized to bind the Bidder to a contract. The Port verifies signature authority on the Labor and Industries website <https://fortress.wa.gov/lni/bbip/Search.aspx> under the contractor registration business owner information. If the business owner information is not current, the Bidder shall show proof of authority to sign at the request of the Port. A Bid submitted by an agent shall have a current power of attorney attached certifying the agent's authority to bind the Bidder

8. Bid Amounts Do Not Include Sales Tax. The Work to be performed constitutes a "retail sale" as this term is defined in RCW 82.04.050. Thus, the Base Bid amount shall include in the sum stated all taxes imposed by law, EXCEPT WASHINGTON STATE AND LOCAL SALES TAX due on the Base Bid. The engaged Contractor will pay retail sales tax on all consumables used during the performance of the Work and on all items that are not incorporated into the final Work; this tax shall be included in the Base Bid price and in any other prices set forth on the Bid Form. The Port will pay state and local retail sales tax due on each progress payment and final payment to the engaged Contractor for transmittal by the Contractor to the Washington State Department of Revenue or to the applicable local government.

#### B. BID SECURITY

1. Purpose and Procedure. Each Bid shall be accompanied by Bid security payable to the Port in the form required by the Bidding Documents and equal to five (5) percent of the Base Bid only (i.e., not including any Alternates or Unit Prices). The Bid security constitutes a pledge by the Bidder to the Port that the Bidder will enter into the Contract with the Port in the form provided, in a timely manner, and on the terms stated in its Bid, and will furnish in a timely manner, the payment and performance bonds, certificates of insurance, and all other documents required in the Contract Documents. Should the Bidder fail or refuse to enter into the Contract or fail to furnish such documents, the amount of the Bid security shall be forfeited to the Port as liquidated damages, not as a penalty. By submitting a Bid, each Bidder represents and agrees that the Bid security, if forfeited, is a reasonable prediction on the Bid Date of future damages to the Port. Failure of the Bidder to provide Bid Security as required shall render the bid non-responsive.
2. Form. The Bid security shall be in the form of a certified or bank cashier's check payable to the Port or a Bid bond executed by a bonding company reasonably acceptable to the Port, licensed in the State of Washington, registered with the Washington State Insurance Commissioner, possess an A.M. Best rating of "A-," Fiscal Size Category (FSC) six (6) or better, and be authorized by the U.S. Department of the Treasury. The Bid security shall be signed by the person or persons legally authorized to bind the Bidder. Bid bonds shall be submitted using the form included with the Bidding Documents.
3. Retaining Bid Security. The Port will have the right to retain the Bid security of Bidders to whom an Award is being considered until the earliest of either: (a) mutual execution of the Contract, and the Port's receipt of payment and performance bonds, (b) the specified time has elapsed so that Bids may be withdrawn, or (c) when all Bids have been rejected.
4. Return of Bid Security. Within sixty (60) days after the Bid Date, the Port will release or return Bid securities to Bidders whose Bids are not to be further considered in awarding the Contract. Bid securities of the three apparent low Bidders will be held until the Contract has been finally executed, after which all un-forfeited Bid securities will be returned. Bid security may be returned in the form provided or by separate payment.

#### C. SUBMISSION OF BIDS

1. Procedure. The Bid, the Bid security, and other documents required to be submitted with the Bid, shall be enclosed in a sealed envelope identified with the Project name and number and the Bidder's name and address. If the Bid is sent by mail, the sealed envelope shall be enclosed in a separate mailing envelope with the notation "SEALED BID ENCLOSED" on the face of the mailing envelope.
  - a. If a Bid is mailed, it shall be addressed to the Port of Tacoma, Contracts Department, 1 Sitcum Plaza, Tacoma, WA 98421.

- b. If a Bid is delivered, it shall be delivered to the Front Reception Desk, Port of Tacoma, 1 Sitcum Plaza, Tacoma, WA 98421.
  - c. The time stamp clock at the Front Reception Desk at 1 Sitcum Plaza is the Port's official clock.
2. Deposit. Bids shall be deposited at the designated location prior to the Bid Date indicated in the Advertisement or Invitation to Bid, or any extension thereof made by Addendum. Bids received after the Bid Date and time specified shall be returned without consideration at the discretion of the Port, or rejected at the time of receipt.
3. Delivery. The Bidder assumes full responsibility for timely delivery at the location designated for receipt of Bids.
4. Form. Oral, facsimile, telephonic, electronic, or email Bids are invalid and will not be considered.

**D. MODIFICATION OR WITHDRAWAL OF BID**

1. After the Bid Date. A Bid may not be modified, withdrawn, or canceled by the Bidder during a ninety (90) day period following the Bid Date, and each Bidder so agrees by virtue of submitting its Bid.
2. Before the Bid Date. Prior to the Bid Date, any Bid submitted may be modified or withdrawn only by notice to the party receiving Bids at the place designated for receipt of Bids. The notice shall be in writing, with the signature of the Bidder, and shall be worded so as not to reveal the amount of the original Bid. Email notice will not be accepted. It shall be the Bidder's sole responsibility to verify that the notice has been received by the Port in time to be withdrawn before the Bid opening.
3. Resubmittal. Withdrawn Bids may be resubmitted up to the time designated for the receipt of Bids, provided that they are then fully in conformance with these Instructions to Bidders.
4. Bid Security with Resubmission. Bid security shall be in an amount sufficient for the Bid as modified or resubmitted.

**E. COMMUNICATIONS**

1. Communications from a Bidder related to these Instructions to Bidders must be in writing to [procurement@portoftacoma.com](mailto:procurement@portoftacoma.com). Communications, including but not limited to, notices and requests by Sub-Bidders shall be made through the Bidder and not directly by a Sub-Bidder to the Port.

**1.05 CONSIDERATION OF BIDS**

- A. OPENING OF BIDS. Unless stated otherwise in the Advertisement or Invitation to Bid or an Addendum, the properly identified Bids received on time will be opened publicly and will be read aloud. An abstract of the Base Bids and any Alternate Bids will promptly (and generally within twenty-four (24) hours) be made available to Bidders and other interested parties.
- B. REJECTION OF BIDS. The Port shall have the right, but not the obligation, to reject any or all Bids for any reason, or for no reason, to reject a Bid not accompanied by the required Bid security, or to reject a Bid which is in any way incomplete or irregular.
- C. BIDDING MISTAKES. The Port will not be obligated to consider notice of claimed Bid mistakes received more than twenty-four (24) hours after the Bid Date. In accordance with Washington law, a low Bidder that claims error and fails to enter into the Contract is prohibited from Bidding on the Project if a subsequent call for Bids is made for the Project.

D. ACCEPTANCE OF BID (AWARD)

1. Intent to Accept. The Port intends, but is not bound, to Award a Contract to the Responsible Bidder with the lowest responsive Bid, provided the Bid has been submitted in accordance with the requirements of the Bidding Documents and does not exceed the funds available. The Port has the right to waive any informality or irregularity in any Bid(s) received and to accept the Bid which, in its judgment, is in its own best interests.
2. Requirements for Award. Before the Award, the lowest responsive Bidder must be deemed Responsible by the Port and must satisfy all Award Requirements.

E. BID PROTEST PROCEDURES

1. Procedure. A Bidder protesting, for any reason, the Bidding Documents, a Bidding procedure, the Port's objection to a Bidder or a person or entity proposed by the Bidder, including but not limited to, a finding of non-Responsibility, the Award of the Contract or any other aspect arising from, or relating in any way to, the Bidding, shall cause a written protest to be filed with the Port within two (2) business days of the event giving rise to the protest. (Intermediate Saturdays, Sundays, and legal holidays are not counted as business days.) The written protest shall include the name of the protesting Bidder, the bid solicitation number and title under which the protest is submitted, a detailed description of the specific factual and legal grounds for the protest, copies of all supporting documents, evidence that the apparent low bidder has been given notice of the protest, and the specific relief requested. The written protest shall be sent by email to [procurement@portoftacoma.com](mailto:procurement@portoftacoma.com).
2. Consideration. Upon receipt of the written protest, the Port will consider the protest. The Port may, within three (3) business days of the Port's receipt of the protest, provide any other affected Bidder(s) the opportunity to respond in writing to the protest. If the protest is not resolved by mutual agreement of the protesting Bidder and the Port, the Contracts Director of the Port, or his or her designee, will review the issues and promptly furnish a final and binding written decision to the protesting Bidder, and any other affected Bidder(s), within six (6) business days of the Port's receipt of the protest. (If more than one (1) protest is filed, the Port's decision will be provided within six (6) business days of the Port's receipt of the last protest.) If no reply is received from the Port during the six (6) business-day period, the protest will be deemed rejected.
3. Waiver. Failure to comply with these protest procedures will render a protest waived.
4. Condition Precedent. Timely and proper compliance with, and exhaustion of, these protest procedures shall be a condition precedent to any otherwise permissible judicial consideration of a protest.

1.06 POST BID INFORMATION

A. THE LOWEST RESPONSIVE BIDDER SHALL:

1. Responsibility Detail Form. Within 24 hours of the Low Responsive Bidder Selection Notification, the apparent low Bidder shall submit to the Port the Responsibility Detail Form and other required documents (Section 00 45 13) executed by an authorized company officer. As requested from the Port, the low responsive Bidder shall provide written confirmation that the person signing the Bid on behalf of the Bidder was duly authorized at the time of bid, a detailed breakdown of the Bid in a form acceptable to the Port, and other information required by the Port.
2. The apparent low Bidder shall submit to the Port upon request:

- a. Additional information regarding the use of the Bidder's own forces and the use of subcontractors and suppliers;
    - b. The names of the persons or entities (including a designation of the Work to be performed with the Bidder's own forces, and the names of those who are to furnish materials or equipment fabricated to a special design) proposed for each of the principal portions of the Work (i.e., either a listed Sub-Bidder or a Sub-Bidder performing Work valued at least ten (10) percent of the Base Bid), consistent with the listing required with the Bid; and
    - c. The proprietary names and the suppliers of the principal items or systems of materials and equipment proposed for the Work.
  3. Failure to provide any of the above information in a timely manner will constitute an event of breach permitting forfeiture of the Bid security.
  4. Bidder Responsibility. The Bidder will be required to establish, to the satisfaction of the Port, the reliability and responsibility of itself and the persons or entities proposed to furnish and perform the Work described in the Bidding Documents. If requested, the Bidder shall meet with the Port to discuss the Bid, including any pricing, the Bid components, and any assumptions made by the Bidder.
  5. Objection. Prior to an Award of the Contract, the Port will notify the Bidder in writing if the Port, after due investigation, has reasonable objection to the Bidder or a person or entity proposed by the Bidder. Upon receiving such objection, the Bidder may, at Bidder's option: (a) withdraw their Bid, (b) submit an acceptable substitute person or entity with no change in the Contract Time and no adjustment in the Base Bid or any Alternate Bid, even if there is a cost to the Bidder occasioned by such substitution, or (c) file a protest in accordance with the Bidding Documents.
  6. Change. Persons and entities proposed by the Bidder to whom the Port has made no reasonable objection must be used on the Work for which they were proposed and shall not be changed, except with the written consent of the Port.
  7. Right to Terminate. The Bidder's representations concerning its qualifications will be construed as a covenant under the Contract. If a Bidder makes a material misrepresentation on a Qualification Statement, the Port has the right to terminate the Contract for cause and may then pursue any remedies that exist under the Contract or that are otherwise available.
- B. INFORMATION FROM OTHER BIDDERS: All other Bidders designated by the Port as under consideration for Award of a Contract shall also provide a properly executed Qualification Statement, if so requested by the Port.

#### 1.07 PERFORMANCE BOND, LABOR AND MATERIAL PAYMENT BOND, AND INSURANCE

- A. BOND REQUIREMENTS. Within ten (10) days after the Port's Notice of Award of the Contract, the successful Bidder shall obtain and furnish statutory bonds pursuant to RCW 39.08 covering the faithful performance of the Contract and the payment of all obligations arising thereunder in the form and amount prescribed in the Contract Documents. Bonds shall be written for one hundred (100) percent of the contract award amount, plus Washington State Sales Tax and Change Orders. The cost of such bonds shall be included in the Base Bid.
  1. On contracts of one hundred fifty thousand dollars (\$150,000) or less, at the option of the Contractor or the General Contractor/Construction Manager as defined in RCW 39.10.210, the Port may, in lieu of the bond, retain ten (10) percent of the contract amount for a period of thirty days after date of final acceptance, or until receipt of all necessary releases from

the department of revenue, the employment security department, and the department of labor and industries and settlement of any liens filed under RCW 60.28, whichever is later. The recovery of unpaid wages and benefits must be the first priority for any actions filed against retainage held by a state agency or authorized local government.

2. On contracts of one hundred fifty thousand dollars (\$150,000) or less, the Port may accept a full payment and performance bond from an individual surety or sureties.
- B. TIME OF DELIVERY AND FORM OF BONDS. The successful Bidder shall deliver an original copy of the required bonds to the Port, 1 Sitcum Plaza, Tacoma, WA 98421, within the time specified in the Contract Documents.
- C. INSURANCE. The successful Bidder shall deliver a certificate of insurance from the Bidder's insurance company that meets or exceeds all requirements of the Contract Documents.
- D. GOVERNMENTAL REQUIREMENTS. Notwithstanding anything in the Bidding or Contract Documents to the contrary, the Bidder shall provide all bonding, insurance, and permit documentation as required by governmental authorities having jurisdiction for any portions of the Project.

#### 1.08 FORM OF AGREEMENT

- A. FORM TO BE USED. The Contract for the Work will be written on the form(s) contained in the Bidding Documents, including any General, Supplemental, or Special Conditions, and the other Contract Documents included with the project manual.
- B. CONFLICTS. In case of conflict between the provisions of these Instructions and any other Bidding Document, these Instructions shall govern. In case of conflict between the provisions of the Bidding Documents and the Contract Documents, the Contract Documents shall govern.
- C. CONTRACT DELIVERY. Within ten (10) days after Notice of Award, the Bidder shall submit a signed Contract to the Port in the form tendered to the Bidder and without modification.

#### **PART 2 - PRODUCTS - NOT USED**

#### **PART 3 - EXECUTION - NOT USED**

#### **END OF SECTION**



## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This Section includes administrative and procedural requirements for substitutions.

### **1.02 DEFINITIONS/CLARIFICATIONS**

- A. Substitutions. Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.
- B. The Contract Documents include performance specifications for products and equipment which meet Project requirements. In those cases where a representative item or manufacturer is named in the specification, it is provided for the sole purpose of identifying a product meeting the required functional performance, and where the words "or equal" are used, a substitution request as further described, is not required.
- C. Where non-competitive or sole source products or manufacturers are explicitly specified with the words "or approved equal," or "Engineer approved equal," or "as approved by the Engineer" are used, they shall be taken to mean "or approved equal." In these cases a substitution request as further described in this Section, is required.

### **1.03 SUBMITTALS**

- A. Substitution Request Form. Use copy of form located at the end of this Section.
- B. Pre-Bid Substitution Requests. Submit one (1) PDF of the Substitution Request Form along with all supporting documentation for consideration of each request. Identify product, fabrication, or installation method to be replaced. Include Drawing numbers and titles. Substitution requests prior to the Bid Date may originate directly from a prime Bidder, or from a prospective Sub-Bidder.
  - 1. Documentation. Show compliance with requirements for substitutions with the following, as applicable:
    - a. Statement indicating why specified product, fabrication, or installation cannot be provided.
    - b. Coordination information, including a list of changes or modifications needed to other parts of the Work that will be necessary to accommodate proposed substitution.
    - c. Product Data, including drawings and descriptions of products, fabrication, and installation procedures.
    - d. Samples, where applicable or requested.
    - e. Certificates and qualification data, where applicable or requested.
    - f. Research reports evidencing compliance with building code in effect for the Project.
  - 2. Engineer's Action. Engineer will review substitution requests if received electronically to [procurement@portoftacoma.com](mailto:procurement@portoftacoma.com) at least seven (7) days prior to the Bid Date. Substitution requests received after this time will not be reviewed.
    - a. Forms of Acceptance. Substitution requests will be formally accepted via written addendum prior to the Bid Date. Bidders shall not rely upon approvals made in any other manner.
    - b. Use product originally specified if Engineer does not issue a decision on use of a proposed substitution within time allocated.

- c. The Port's decision of approval or disapproval of a proposed substitution shall be final.
- C. Post-Award Substitution Requests must be submitted by the Contractor and not a Subcontractor nor Supplier.
  - 1. Documentation. Show compliance with requirements for substitutions with the following, as applicable:
    - a. Statement indicating why specified product or fabrication or installation cannot be provided, if applicable.
    - b. Coordination information, including a list of changes or modifications needed to other parts of the Work that will be necessary to accommodate proposed substitution.
    - c. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Include annotated copy of applicable specification Section. Significant qualities may include, but are not limited to, attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
    - d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
    - e. Samples, where applicable or requested.
    - f. Certificates and qualification data, where applicable or requested.
    - g. List of similar installations for completed projects with project names and addresses. Also provide names and addresses of the applicable architect, engineer, and owner.
    - h. Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.
    - i. Research reports evidencing compliance with building code in effect for the Project.
    - j. Comparison of the approved Baseline Project Schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
    - k. Cost information, including a proposal of change, if any, in the Contract Sum.
    - l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents except as indicated in substitution request, is compatible with related materials, and is appropriate for applications indicated.
    - m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
  - 2. Engineer's Action. If necessary, Engineer will request additional information or documentation for evaluation within seven (7) calendar days of receipt of a request for substitution. Engineer will notify Contractor through Port of acceptance or rejection of proposed substitution within fifteen (15) calendar days of receipt of request, or seven (7) calendar days of receipt of additional information or documentation, whichever is later.
    - a. Forms of Acceptance. Change Order or Minor Change in Work.

- b. Use product originally specified if Engineer does not issue a decision on use of a proposed substitution within time allocated.
- 3. Substitutions for Cause. Submit requests for substitution immediately upon discovery of need for change, but not later than fourteen (14) days prior to date required for preparation and review of related submittals.
  - a. Conditions. Engineer will consider Contractor's request for substitution when the following conditions are satisfied:
    - 1) Requested substitution is consistent with the Contract Documents and will produce indicated results.
    - 2) Requested substitution will not adversely affect the Baseline Project Schedule.
    - 3) Requested substitution has received necessary approvals of authorities having jurisdiction.
    - 4) Requested substitution is compatible with other portions of the Work.
    - 5) Requested substitution has been coordinated with other portions of the Work.
    - 6) Requested substitution provides specified warranty.
    - 7) If requested substitution involves more than one (1) contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.
- 4. Substitutions for Convenience. Engineer will consider Contractor's requests for substitution if received within fourteen (14) days after the Notice of Award.
  - a. Conditions. Engineer will consider Contractor's request for substitution when the following conditions are satisfied:
    - 1) Requested substitution offers Port a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Port must assume. Port's additional responsibilities may include compensation to Engineer for redesign and evaluation services, increased cost of other construction by Port, and similar considerations.
    - 2) Requested substitution does not require extensive revisions to the Contract Documents.
    - 3) Requested substitution is consistent with the Contract Documents and will produce indicated results.
    - 4) Requested substitution will not adversely affect the Baseline Project Schedule.
    - 5) Requested substitution has received necessary approvals of authorities having jurisdiction.
    - 6) Requested substitution is compatible with other portions of the Work.
    - 7) Requested substitution has been coordinated with other portions of the Work.
    - 8) Requested substitution provides specified warranty.
    - 9) If requested substitution involves more than one (1) contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors

involved.

D. Substitutions will not be considered when:

1. Indicated or implied on shop drawings or product data submittals without formal request submitted in accordance with this Section.
2. Acceptance will require substantial revision of Contract Documents or other items of the Work.
3. Submittal for substitution request does not include point-by-point comparison of proposed substitution with specified product.

1.04 QUALITY ASSURANCE

- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**PROJECT TITLE:** WUT Admin & Marine Building Roof Project      **PROJECT NO.:** 201111.01

SUBMITTED BY: \_\_\_\_\_ CONTRACT NO.: 071399

PRIME/SUB/SUPPLIER: \_\_\_\_\_ DATE: \_\_\_\_\_

-----  
Specification Title: \_\_\_\_\_ Section No.: \_\_\_\_\_

Description: \_\_\_\_\_ Paragraph: \_\_\_\_\_

Page No.: \_\_\_\_\_

-----  
Proposed Substitution: \_\_\_\_\_

Trade Name: \_\_\_\_\_ Model No.: \_\_\_\_\_

Manufacturer: \_\_\_\_\_

Address: \_\_\_\_\_ Phone No.: \_\_\_\_\_

Installer: \_\_\_\_\_

Address: \_\_\_\_\_ Phone No.: \_\_\_\_\_

Differences between proposed substitution and specified product: \_\_\_\_\_

-----  
☐ Point-by-Point comparative data attached - REQUIRED

-----  
Reason for not providing specified item: \_\_\_\_\_

-----  
Similar Installation:

Project: \_\_\_\_\_ A/E: \_\_\_\_\_

Address: \_\_\_\_\_

Owner: \_\_\_\_\_ Date Installed: \_\_\_\_\_

Proposed substitution affects other parts of Work: ☐ No ☐ Yes; explain \_\_\_\_\_

-----  
Supporting Data Attached:

☐ Drawings ☐ Product Data ☐ Samples ☐ Tests ☐ Reports ☐ Other: \_\_\_\_\_

-----  
Applicable to Substitution Requests During Construction:

Proposed to Port for accepting substitution: \$ \_\_\_\_\_

Proposed substitution changes Contract Time: ☐ No ☐ Yes [Add] [Deduct] \_\_\_\_\_ # days.

-----  
The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product.
- Same warranty will be furnished for proposed substitution as for specified product.

- Same maintenance service and source of replacement parts, as applicable, is available.
- Proposed substitution will have no adverse effect on other trades and will not affect or delay Baseline Project Schedule.
- Cost data as stated above is complete. Claims for additional costs related to accepted substitution which may subsequently become apparent are to be waived.
- Proposed substitution does not affect dimensions and functional clearances.
- Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.
- Coordination, installation, and changes in the Work as necessary for accepted substitution will be complete in all respects.

-----  
Submitted By: \_\_\_\_\_  
Signed By: \_\_\_\_\_ Firm: \_\_\_\_\_  
Address: \_\_\_\_\_  
Telephone: \_\_\_\_\_ Email: \_\_\_\_\_  
Attachments: \_\_\_\_\_  
-----

#### A/E's REVIEW AND RECOMMENDATION

- ☐ Approved Substitution
- ☐ Approved Substitution as Noted
- ☐ Reject Substitution - Use specified materials.
- ☐ Substitution Request received too late - Use specified materials.

Signed by: \_\_\_\_\_ Date: \_\_\_\_\_  
-----

#### ENGINEER'S REVIEW AND ACTION

- ☐ Substitution Approved - Make submittals in accordance with this Specification Section. If during construction, prepare Change Order.
- ☐ Substitution Approved as Noted - Make submittals in accordance with this Specification Section. If during construction, prepare Change Order.
- ☐ Substitution Rejected - Use specified materials.
- ☐ Substitution Request received too late - Use specified materials.

Signed by: \_\_\_\_\_ Date: \_\_\_\_\_

**END OF SECTION**

**PART 1 - GENERAL**

**1.01 SUMMARY**

- A. This Section provides the notification required for disclosure of asbestos, lead-containing or other hazardous materials.

**1.02 HAZARDOUS MATERIALS NOTICE**

- A. The Port is reasonably certain that asbestos and lead will not be disturbed by the project. If the Contractor encounters material suspected of containing lead or asbestos which will interfere with the execution of the work, the Contractor shall stop work and notify the Engineer.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

**BIDDER'S NAME:** \_\_\_\_\_

**PROJECT TITLE:** WUT ADMIN & MARINE BUILDING ROOF PROJECT

The undersigned Bidder declares that it has read the Contract Documents (including documents provided by reference), understands the conditions under which the Work will be performed, has examined the Project site, and has determined for itself all situations affecting the Work herein Bid upon. Bidder proposes and agrees, if this Bid is accepted, to provide at Bidder's own expense, all labor, machinery, tools, materials, etc., including all Work incidental to, or described or implied as incidental to such items, according to the Contract Documents, and that the Bidder will complete the Work within the time stated, and that Bidder will accept in full the lump sum or unit price(s) set forth below:

ITEM NO.	DESCRIPTION OF ITEM	QTY	UOM	UNIT PRICE	EXTENDED PRICE (QTY. x UNIT PRICE)
1	Mobilization & Demobilization	1	LS		
2	Project Administration	1	LS		
3	Roofing Installation (Admin Building)	1	LS		
4	Roofing Installation (Marine Building)	1	LS		
5	Bird Deterrent System Installation (Admin Building)	1	LS		
6	Bird Deterrent System Installation (Marine Building)	1	LS		
7	Unforeseen Conditions Allowance	1	LS	\$15,000	\$15,000
TAXABLE BASE BID SUBTOTAL					

TOTAL BID AMOUNT	
10.2% WASHINGTON STATE SALES TAX (WSST) ON BASE BID SUBTOTAL	
BID TOTAL (WITH WSST)	

Note: Show prices in figures only.

Evaluation of Bids. In accordance with the provisions of the Contract Documents, Bids will be evaluated to determine the lowest Base Bid Subtotal offered by a responsible Bidder submitting a responsive Bid.

Non-Collusion Representation. The Bidder declares under penalty of perjury that the Bid submitted is genuine and not a sham or collusive bid, or made in the interest or on behalf of any person or firm not therein named; and further represents that the Bidder has not directly or indirectly induced or solicited any other bidder to submit a sham bid, or encouraged any other person or corporation to refrain from bidding; and that the Bidder has not in any manner sought by collusion to secure to the Bidder an advantage over any other bidder or bidders.



RCW 39.04.350 Certification. The Bidder represents and certifies, under penalty of perjury, that within the three- (3-) year period immediately preceding the Bid Date, the Bidder has not been determined by a final and binding citation and notice of assessment issued by the Department of Labor and Industries, nor through a civil judgment entered by a court of limited or general jurisdiction, to have willfully violated, as defined in RCW 49.48.082, any provision of Chapters 49.46, 49.48, nor 49.52 RCW.

Addenda. Bidder acknowledges receipt and acceptance of all Addenda through No. \_\_\_\_ (Identify Last Addenda By Number)

Bid Security. A certified check, cashier's check, or other obligation of a bank, or a bid bond in substantially the form set forth in Section 00 43 13, Bid Security Form for at least five (5) percent of the Base Bid Subtotal, shall be submitted with this Bid.

_____ Name of Firm	_____ Date
_____ Signature	_____ By Title
_____ Mailing Address	_____ City, State Zip Code
_____ Telephone Number	_____ Email Address
_____ WA State Contractor's License No.	_____ Employment Security Department No.

\_\_\_\_\_  
Identification of Bidder as a sole proprietor, a partnership, a joint venture, a corporation, or another described form of legal entity

**END OF SECTION**

KNOW ALL MEN BY THESE PRESENTS:

That we, \_\_\_\_\_, as Principal, and  
\_\_\_\_\_, as Surety, are held and firmly bound unto  
the PORT OF TACOMA as Obligee, in the penal sum of \_\_\_\_\_  
Dollars, for the payment of which the Principal and Surety bind themselves, their heirs, executors,  
administrators, successors and assigned, jointly and severally, by these present.

The condition of this obligation is such that if the Obligee shall make any award to the Principal for  
\_\_\_\_\_, according to the terms of the proposal or bid  
made by the Principal therefor, and the Principal shall duly make and enter into a contract with the  
Obligee in accordance with the terms of said proposal or bid and award and shall give bond for the  
faithful performance thereof, with Surety or Sureties approved by the Obligee; or, if the principal shall, in  
case of failure to do so, pay and forfeit to the Obligee the penal amount of the deposit specified in the  
call for bids, then this obligation shall be null and void; otherwise it shall be and remain in full force and  
effect and the Surety shall forthwith pay and forfeit to the Obligee, as penalty and liquidated damages,  
the amount of this bond.

SIGNED, SEALED AND DATED THIS \_\_\_\_\_ DAY OF \_\_\_\_\_, 20\_\_\_\_

BY \_\_\_\_\_  
PRINCIPAL

BY \_\_\_\_\_  
SURETY

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

AGENT AND ADDRESS

Note: Bidder may submit Surety's bid bond form, provided it is similar in substance, made out in the  
name of the Port of Tacoma, and that the agent's name and address appear as specified. Bonds  
containing riders limiting responsibility for toxic waste or limiting the term of responsibility will be rejected.

**END OF SECTION**

**THIS IS NOT TO BE SUBMITTED WITH A BID.**

THE LOW RESPONSIVE BIDDER SHALL BE REQUIRED TO COMPLETE THIS RESPONSIBILITY DETAIL FORM AS SPECIFIED IN SECTION 00 21 00 - INSTRUCTIONS TO BIDDERS. **THIS COMPLETED RESPONSIBILITY DETAIL FORM SHALL BE SUBMITTED ELECTRONICALLY (PDF) VIA EMAIL TO THE CONTACT(S) IDENTIFIED IN THE LOW RESPONSIVE BIDDER SELECTION NOTIFICATION.**

**BIDDER'S COMPANY NAME:** \_\_\_\_\_

For the below Mandatory Bidder Responsibility Criteria, please mark the appropriate choice.

**1.01 MANDATORY BIDDER RESPONSIBILITY CRITERIA**

- A. The Bidder shall meet the following mandatory responsibility criteria as described in RCW 39.04.350(1). The Bidder shall be rejected as not responsible if any answer to questions 1 through 5 is "No" or any answer to questions 6 through 8 is "Yes."
1. Does the Bidder have a Certificate of Registration in compliance with RCW 18.27?  
☐ Yes      ☐ No
  2. Does the Bidder have a current Washington State Unified Business Identifier number?  
☐ Yes      ☐ No
  3. Does the Bidder have Industrial Insurance Coverage for the Bidder's employees working in Washington State as required in RCW 51?  
☐ Yes      ☐ No
  4. Does the Bidder have an Employment Security Department number as required in RCW 50?  
  
*\*Attach letter dated within six (6) months of Bid Date.*  
*\*Request a letter electronically by clicking on the following link*  
*<https://fortress.wa.gov/esd/twt/pwcinternet/> or by emailing a request to*  
*[publicworks@esd.wa.gov](mailto:publicworks@esd.wa.gov).*  
☐ Yes      ☐ No
  5. Does the Bidder have a Washington State Excise Tax Registration number as required in RCW 82?  
☐ Yes      ☐ No
  6. Has the Bidder been disqualified from bidding on any public works project under RCW 39.06.010 or 39.12.065(3)?  
☐ Yes      ☐ No
  7. Has the Bidder violated RCW 39.04.370 more than one (1) time as determined by the Washington State Department of Labor and Industries?  
☐ Yes      ☐ No

8. Has the Bidder ever been found to be out of compliance with Apprenticeship Utilization requirements of RCW 39.04.320?
- ☐ Yes ☐ No
9. Has the Bidder ever been found to have willfully violated, as defined in RCW 49.48.082, any provision of Chapters 49.46, 49.48, or 49.52 RCW within the three- (3-) year period immediately preceding the date of this bid solicitation?
- ☐ Yes ☐ No
10. Has the Bidder completed the training required by RCW 39.04.350, or is the Bidder on the list of exempt businesses maintained by the Department of Labor and Industries?
- ☐ Yes ☐ No

If any answer to questions 1 through 5 is "No" or any answer to questions 6 through 8 is "Yes" - **STOP HERE** and contact the Contract Administrator. The Bidder is not responsible for this Work. Otherwise proceed to 1.02. **Provide attached to this completed form documentation to confirm responsibility criteria.**

For remaining criteria below, check or fill-out the appropriate item. Based upon the answer provided by the Bidder, the Port may request additional information or seek further explanation. As needed, provide backup documentation for any explanations listed below.

#### 1.02 CONTRACT AND REGULATORY HISTORY

- A. The Port will evaluate whether the Bidder's contract and regulatory history demonstrates an acceptable record of past project performance and consistent responsibility. The Bidder shall answer the following questions. The Bidder may be rejected as not responsible if any answer to questions 1 through 5 below is "Yes."

1. Has the Bidder had a contract terminated for cause or default in the last five (5) years?
- ☐ Yes, **If YES, explain below.** ☐ No
- 
2. Has the Bidder required a Surety to take over all, or a portion of, a project to cure or respond to an asserted default or material breach of contract on the part of the Bidder on any public works project in the last five (5) years?
- ☐ Yes, **If YES, explain below.** ☐ No
- 
3. Have the Bidder and major Sub-Bidders been in bankruptcy, reorganization, and/or receivership on any public works project in the last five (5) years?
- ☐ Yes, **If YES, explain below.** ☐ No
-

4. Have the Bidder and major Sub-Bidders been disqualified by any state or local agency from being awarded and/or participating on any public works project in the last five (5) years?

☐ Yes, **If YES, explain below.** ☐ No

---

5. Are the Bidder and major Sub-Bidders currently a party to a formal dispute resolution process with the Port (i.e., a pending mediation, arbitration, or litigation)?

☐ Yes, **If YES, explain below.** ☐ No

---

#### 1.03 ACCIDENT/INJURY EXPERIENCE

- A. The Port will evaluate the Bidder's accident/injury Experience Modification Factor ("EMF") from the Washington State Department of Labor and Industries to assess whether the Bidder has an acceptable safety record preventing personal injuries on projects.
- B. List the Bidder's accident/injury EMF for the last five (5) years. An experience factor is calculated annually by the Washington State Department of Labor and Industries.

Year	Effective Year	Experience Factor
1		
2		
3		
4		
5		

If the Bidder has received an EMF of greater than 1.0 for any year, explain the cause(s) of the designation and what remedial steps were taken to correct the EMF. The Bidder may be rejected as not responsible if the Bidder's EMF is greater than 1.0 and sufficient remedial steps have not been implemented.

---

#### 1.04 WORK PERFORMED BY BIDDER

- A. The Bidder shall state the amount of the Work, as an equivalent to the Base Bid, excluding taxes, insurance, and bonding, the Bidder will execute with its own forces.

\_\_\_\_\_ %

#### 1.05 ADDITIONAL CONTRACTOR INFORMATION

- A. As part of completing this Responsibility Detail Form, **submit the following information with the completed Responsibility Detail Form:**
- Bidder's recent job resume, including a list of similar projects performed and contact information for the similar project owner(s), a brief description of work, start and end dates, and contract amount.
  - Resumes of Bidder's proposed project manager and job superintendent.
- B. The Bidder's failure to provide the required project information may result in a determination of the Bidder being declared non-responsible by the Port.
-

- C. The Bidder shall submit this completed, **SIGNED** Responsibility Detail Form electronically (PDF), with all requested backup documentation, via email to the contact(s) noted on the Low Responsive Bidder Selection Notification.
- D. The Bidder and its subcontractors to verify that its subcontractors at each tier meet the responsibility criteria as required by RCW 39.06.020 and 39.04.350.
  - 1. Bidder shall verify major subcontractors meet the responsibility criteria required. Fill out one Port of Tacoma Public Works Project Bidder Evaluation Checklist for Subcontractors for each major subcontractor and submit to the Port with this form. Backup documentation is not required to be submitted.

**PROJECT: WUT Admin & Marine Building Roof Project**

**PROJECT NO.: 201111.01**

**CONTRACT NO.: 071399**

**Responsibility Certification Form**

The Low responsive Bidder shall complete the Responsibility Detail Form, attach all documentation, and submit to the Port within twenty-four (24) hours following receipt of the Low Responsive Bidder Selection Notification. All forms shall be submitted electronically (PDF) via email to the contact(s) listed on the Selection Notice. Note, the same project may be used to demonstrate experience across multiple categories if applicable.

By completing and signing this Responsibility Detail Form, the Bidder is certifying that the information contained within the Form, the backup documentation, and any additional information requested by the Port is true and complete. The Bidder's failure to disclose the required information or the submittal of false or misleading information may result in the rejection of the Bidder's Bid, revocation of award, or contract termination.

The information provided herein is true and complete.

\_\_\_\_\_  
Signature of Authorized Representative

\_\_\_\_\_  
Date

\_\_\_\_\_  
Print Name and Title

**PORT OF TACOMA PUBLIC WORKS PROJECT BIDDER EVALUATION CHECKLIST FOR  
SUBCONTRACTORS**

**PROJECT TITLE:** WUT Admin & Marine Building Roof Project

**BIDDER:** \_\_\_\_\_

**CONTRACT AND PROJECT NUMBER:** 071399/ 201111.01

This checklist shall be completed by the Bidder and its subcontractors to verify that its subcontractors at each tier meet the responsibility criteria as required by RCW 39.06.020 and RCW 39.04.350.

This checklist should be submitted to the Port of Tacoma Contracts Administrator within twenty-four (24) hours of request.

**Document verification information or backup data is not to be submitted to the Port, this information should remain on file with the Contractor and be presented to the Port if requested at a later date.**

<b>Item No.</b>	<b>Item</b>	<b>Initials/Comments</b>
1.	At the time of Bid submittal, have a certificate of registration in compliance with RCW 18.27: Check the L&I site <a href="https://fortress.wa.gov/lni/bbip/">https://fortress.wa.gov/lni/bbip/</a> .  Verify that a subcontractor has an electrical contractor license, if required by RCW 19.28, or an elevator contractor license, if required by RCW 70.87.	
2.	While reviewing registration information above, also check contractor's <b>Employer Liability Certificate</b> to verify workers' comp (industrial insurance) premium status – current account.  Complete a "Submit Contractor Tracking Request" to be notified if the contractor fails to pay workers' comp premiums or renew their contractor registration or if their electrical contractor license is suspended or revoked within one year.	
3.	State excise tax registration number (Department of Revenue). (contractor's Washington State Unified Business Identifier and tax registration number) <a href="http://dor.wa.gov/content/doingbusiness/registermybusiness/brd/">http://dor.wa.gov/content/doingbusiness/registermybusiness/brd/</a> .	
4.	Not disqualified from bidding on any public works contract under RCW 39.06.010 or RCW 39.12.065(3).  Check the Department of Labor and Industries <a href="http://www.lni.wa.gov/TradesLicensing/PrevWage/AwardingAgencies/DebarredContractors/">http://www.lni.wa.gov/TradesLicensing/PrevWage/AwardingAgencies/DebarredContractors/</a> .	
5.	Verify subcontractors are registered with the Washington State Employment Security Department (ESD) and have an account number. Request a letter to be sent from the subcontractor electronically by clicking on the following link <a href="https://fortress.wa.gov/esd/twt/pwcinternet/">https://fortress.wa.gov/esd/twt/pwcinternet/</a> or by emailing a request to <a href="mailto:publicworks@esd.wa.gov">publicworks@esd.wa.gov</a> . Include ESD#, UBI#, and business name in the email. Certificate of Coverage letter issued/dated within the last six (6) months.	

Item No.	Item	Initials/ Comments
	Document if subcontractor confirms in writing, under penalty of perjury, that it has no employees and this requirement does not apply.	

**END OF SECTION**



THIS AGREEMENT is made and entered into by and between the PORT OF TACOMA, a State of Washington municipal corporation, hereinafter designated as the "Port," and:

The "Contractor" is: \_\_\_\_\_ (Legal Name)

\_\_\_\_\_ (Address)

\_\_\_\_\_ (Address 2)

\_\_\_\_\_ (Phone No.)

The "Project" is: WUT Admin & Marine Building Roof Project (Title)

201111.01 | 071399 (Project/Contract No.)

1815 Port of Tacoma Road (Project Address)

Tacoma, WA 98421 (Project Address 2)

The "Engineer" is: Thais Howard, PE (Engineer)

Director of Engineering (Title)

thoward@portoftacoma.com (Email)

(253)888-4718 (Phone No.)

The "Contractor's Representative" is: \_\_\_\_\_ (Representative)

\_\_\_\_\_ (Title)

\_\_\_\_\_ (Email)

\_\_\_\_\_ (Phone No.)

#### BACKGROUND AND REPRESENTATIONS:

The Port publicly solicited bids on the Contract Documents. The Contractor submitted a Bid to the Port on the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ to perform the Work.

The Contractor represents that it has the personnel, experience, qualifications, capabilities, and means to accomplish the Work in strict accordance with the Contract Documents, within the Contract Time and for the Contract Price, and that it and its Subcontractors satisfy the responsibility criteria set forth in the

Contract Documents, including any supplemental responsibility criteria.

The Contractor further represents that it has carefully examined, and is fully familiar with, all provisions of the Contract Documents, including any Addenda, that it has fully satisfied itself as to the nature, location, difficulty, character, quality, and quantity of the Work required by the Contract Documents and the conditions and other matters that may be encountered at or near the Project site(s), or that may affect performance of the Work or the cost or difficulty thereof, including all applicable safety and site responsibilities, and that it understands and can satisfy all scheduling and coordination requirements and interim milestones.

**AGREEMENT:**

The Port and the Contractor agree as follows:

**1.0 CONTRACTOR TO FULLY PERFORM THE WORK**

The Contractor shall fully execute and complete the entire Work for the Project described in the Contract Documents, except to the extent specifically indicated in the Agreement, the General Conditions of the Contract (as well as any Supplemental, Special, or other conditions included in the Project Manual), the Drawings, the Specifications, and all Addenda issued prior to, and all modifications issued after, execution of the Contract.

**2.0 DATE OF COMMENCEMENT**

The date of commencement of the Work, which is the date from which the Contract Time is measured, shall be fixed as the date of execution of the Contract.

**3.0 CONTRACT TIME AND LIQUIDATED DAMAGES**

The Contractor shall achieve all interim milestones as set forth in the Contract Documents and Substantial Completion of the entire Work not later than 120 calendar days from execution of the Contract, subject to adjustments of this Contract Time as provided in the Contract Documents. The Contractor shall achieve Final Completion of the entire Work within 30 calendar days of the date on which Substantial Completion is achieved.

Provisions for liquidated damages as a reasonable estimate of future loss, as of the date of this Agreement, are included in the Contract Documents. The parties agree that the stated liquidated damages are reasonable and not penalties individually nor cumulatively.

The liquidated damages for failure to achieve Substantial Completion by the required date shall be \$425 per calendar day. After the required Final Completion date, the liquidated damages for failure to achieve Final Completion shall be \$150 per calendar day.

Liquidated damages assessed by the Port will be deducted from monies due to the Contractor, or from monies that will become due to the Contractor. The liquidated damages, as specified and calculated herein, shall be levied, cumulatively if applicable, for each and every calendar day that Substantial Completion and/or Final Completion of the Work is delayed beyond the required completion dates, or the completion dates modified by the Port for extensions of the Contract Time.

**4.0 CONTRACT PRICE**

In accordance with the Contractor's Bid dated \_\_\_\_\_, the Port shall pay the Contractor in current funds for the Contractor's performance of the Contract, the Contract Price of

\_\_\_\_\_ Dollars (\$\_\_\_\_\_), subject to additions and deductions as provided in the Contract Documents. State and local sales tax is not included in the Contract Price, but will be due and paid by the Port with each progress payment.

#### 5.0 INSURANCE AND BONDS

The Contractor shall purchase and maintain insurance and provide bonds as set forth in the Contract Documents.

This Agreement is entered into as of the day and year first written above:

CONTRACTOR

PORT OF TACOMA

By: \_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_

Title: \_\_\_\_\_

Date: \_\_\_\_\_

Execution \_\_\_\_\_  
Date: \_\_\_\_\_

**END OF SECTION**

**PERFORMANCE BOND # \_\_\_\_\_**

**CONTRACTOR (NAME AND ADDRESS)**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**SURETY (NAME AND PRINCIPLE PLACE OF BUSINESS)**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**OWNER (NAME AND ADDRESS)**

PORT OF TACOMA  
P.O. BOX 1837  
TACOMA, WA 98401-1837

**AGENT OR BROKER (FOR INFORMATION ONLY)**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**KNOW ALL MEN BY THESE PRESENTS:**

That \_\_\_\_\_ as Principal, hereinafter called Contractor, and \_\_\_\_\_ as Surety, hereinafter called Surety, are held and firmly bound unto the Port of Tacoma as Obligee, hereinafter called the Port, in the amount of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_) for the payment whereof Contractor and Surety bind themselves, their executors, administrators, legal representatives, successors, and assigns, jointly and severally, firmly by these presents.

**WHEREAS:**

Contractor shall execute an agreement with the Port for WUT Admin & Marine Building Roof Project, Project No. 201111.01/Contract No. 071399, a copy of which Contract is by reference made a part hereof (the term "Contract" as used herein to include the aforesaid agreement together with all the Contract Documents, addenda, modifications, all alterations, additions thereto, deletions therefrom, and any other document or provision incorporated into the Contract) and is hereinafter referred to as the Contract.

This bond is executed and issued pursuant to the provisions of RCW 39.08.

**NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION** is such that if Contractor shall promptly and faithfully perform said Contract, then this obligation shall be null and void; otherwise, it shall remain in full force and effect.

**FURTHER:**

- A. Surety hereby waives notice of any alterations, change orders, modifications, or extensions of time made by the Port.
- B. Surety recognizes that the Contract includes provisions for additions, deletions, and modifications to the Work and/or Contract Time and the amounts payable to the Contractor. Subject to the limitations contained in (A) above, Surety agrees that no such addition, deletion, or modification, or any combination thereof, shall avoid or impair Surety's obligation hereunder.
- C. Whenever Contractor has been declared by the Port to be in default, and the Port has given Surety notice of the Port's determination of such default, Surety shall promptly (in no event more than fifteen (15) days following receipt of such notice) advise the Port of its intended action to:
  1. Remedy the default within fifteen (15) days following its advice to the Port as set forth above, or
  2. Assume within fifteen (15) days, following its advice to the Port as set forth above, completion of the Contract in accordance with the Contract Documents and become

- entitled to payment of the balance of the Contract Sum, or
3. Pay the Port upon completion of the Contract, in cash, the cost of completion together with all other reasonable costs and expenses incurred by the Port as a result of the Contractor's default, including but not limited to, those reasonable costs and expenses incurred by the Port in its efforts to mitigate its losses, which may include, but are not limited to, attorney's fees and efforts to complete the Work prior to the Surety exercising the options available to it as set forth herein.
  - D. If the Port shall commence suit and obtain judgment against the Surety for recovery hereunder, then the Surety, in addition to such judgment, shall pay all costs and attorney's fees incurred by the Port in enforcement of its rights hereunder. Venue for any action arising out of, or in connection with, this bond shall be in Pierce County, Washington.
  - E. No right or action shall accrue on this bond to, or for the use of, any person or corporation other than the Port of Tacoma.

Signed and Sealed the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

**IMPORTANT:** Surety companies executing bonds must have an A.M. Best Rating of "A-, FSC (6)" or higher, have an underwriting limitation of not less than the Contract Sum, and be authorized to transact business in the State of Washington.

**SURETY**

**CONTRACTOR**

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Printed Name and Title

\_\_\_\_\_  
Printed Name and Title

Power of Attorney attached.

**END OF SECTION**

**LABOR AND MATERIAL PAYMENT BOND # \_\_\_\_\_**

**CONTRACTOR (NAME AND ADDRESS)**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**SURETY (NAME AND PRINCIPLE PLACE OF BUSINESS)**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**OWNER (NAME AND ADDRESS)**

PORT OF TACOMA  
P.O. BOX 1837  
TACOMA, WA 98401-1837

**AGENT OR BROKER (FOR INFORMATION ONLY)**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**KNOW ALL MEN BY THESE PRESENTS:**

That \_\_\_\_\_ as Principal, hereinafter called Contractor, and \_\_\_\_\_ as Surety, hereinafter called Surety, are held and firmly bound unto the Port of Tacoma as Oblige, hereinafter called the Port, and all others entitled to recovery hereunder, in the amount of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_) for the payment whereof Contractor and Surety bind themselves, their executors, administrators, legal representatives, successors, and assigns, jointly and severally, firmly by these presents.

**WHEREAS:**

Contractor shall execute an agreement with the Port for WUT Admin & Marine Building Roof Project, Project No. 201111.01/Contract No. 071399, a copy of which Contract is by reference made a part hereof (the term "Contract" as used herein to include the aforesaid agreement together with all the Contract Documents, addenda, modifications, alterations, additions thereto, deletions therefrom, and any other document or provision incorporated into the Contract) and is hereinafter referred to as the Contract.

This bond is executed pursuant to the provisions of RCW 39.08.

**NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION** is such that if Contractor shall promptly make payment to all claimants, as hereinafter defined, for all labor and material used or reasonably required for use in the performance of the Contract and shall indemnify and save the Port harmless from all cost and damage by reason of Contractor's default, then this obligation shall be null and void; otherwise, it shall remain in full force and effect, subject to the following conditions.

- A. Surety hereby waives notice of any alterations, change orders, modifications, or extensions of time made by the Port.
- B. Surety recognizes that the Contract includes provisions for additions, deletions, and modifications to the Work and/or Contract Time and the amounts payable to the Contractor. Subject to the limitations contained in (A) above, Surety agrees that no such addition, deletion, or modification, or any combination thereof, shall avoid or impair Surety's obligation hereunder.
- C. Surety hereby agrees that every person protected under the provisions of RCW 39.08.010 who has not been paid as provided under the Contract, and pursuant to RCW 39.08.010, less any amounts withheld pursuant to statute, and less retainage withheld pursuant to RCW 60.28, after the expiration of a period of thirty (30) days after the date on which the completion of the Contract in accordance with RCW 39.08, may sue on this bond, prosecute the suit to final judgment as may be due claimant, and have execution thereon including recovery of reasonable costs and attorney's fees as provided by RCW 39.08. The Port shall not be liable for the payment of any costs or expenses of any such suit.

- D. No suit or action shall be commenced hereunder by any claimant unless claimant shall have given the written notices to the Port, and where required, the Contractor, in accordance with RCW 39.08.030.
- E. The amount of this bond shall be reduced by, and to the extent of, any payment or payments made in good faith hereunder, inclusive of the payment by Surety of claims which may be properly filed in accordance with RCW 39.08 whether or not suit is commenced under and against this bond.
- F. If any Claimant shall commence suit and obtain judgment against the Surety for recovery hereunder, then the Surety, in addition to such judgment and attorney fees as provided by RCW 39.08.030, shall also pay such costs and attorney fees as may be incurred by the Port as a result of such suit. Venue for any action arising out of, or in connection with, this bond shall be in Pierce County, Washington.

Signed and Sealed the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

**IMPORTANT:** Surety companies executing bonds must have an A.M. Best Rating of "A-, FSC (6)" or higher, have an underwriting limitation of not less than the Contract Sum, and be authorized to transact business in the State of Washington.

**SURETY**

**CONTRACTOR**

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Printed Name and Title

\_\_\_\_\_  
Printed Name and Title

Power of Attorney attached.

**END OF SECTION**

BOND NO.: \_\_\_\_\_

PROJECT TITLE: WUT Admin & Marine Building Roof Project

PROJECT NO.: 201111.01

CONTRACT NO.: 071399

KNOW ALL MEN BY THESE PRESENTS: That we, \_\_\_\_\_  
\_\_\_\_\_ a corporation existing under and by virtue of the laws of the State of Washington and authorized to do business in the State of Washington, as Principal, and \_\_\_\_\_, a corporation organized and existing under the laws of the State of \_\_\_\_\_ and authorized to transact the business of surety in the State of Washington, as Surety, are jointly and severally held and bound unto the PORT OF TACOMA, hereinafter called Port, as Obligee, and are similarly held and bound unto the beneficiaries of the trust fund created by RCW 60.28 as their heirs, executors, administrators, successors, and assigns in the penal sum of \_\_\_\_\_ (\$\_\_\_\_\_) plus five (5) percent of any increases in the Contract Price that have occurred or may occur, due to change orders, increases in the quantities, or the addition of any new item of work.

WHEREAS, on the \_\_\_\_\_ day of \_\_\_\_\_, the said Principal herein executed Contract No. 071399 with the Port for WUT Admin & Marine Building Roof Project, Project No. 201111.01.

WHEREAS, said Contract and RCW 60.28 require the Port to withhold from the Principal the sum of five (5) percent from monies earned by the Principal on estimates during the progress of the work, hereinafter referred to as earned retained funds.

WHEREAS, the Principal has requested that the Port accept a bond in lieu of earned retained funds as allowed under RCW 60.28.

NOW THEREFORE, this obligation is such that the Surety, its successors, and assigns are held and bound unto the Port and unto all beneficiaries of the trust fund created by RCW 60.28.011(1) in the aforesaid sum. This bond, including any proceeds therefrom, is subject to all claims and liens and in the same manner and priority as set forth for retained percentages in RCW 60.28. The condition of this obligation is also that if the Principal shall satisfy all payment obligations to persons who may lawfully claim under the trust fund created pursuant to RCW 60.28, to the Port, and indemnify and hold the Port harmless from any and all loss, costs, and damages that the Port may sustain by release of said retainage to Principal, then this obligation shall be null and void, provided the Surety is notified by the Port that the requirements of RCW 60.28.021 have been satisfied and the obligation is duly released by the Port.

IT IS HEREBY DECLARED AND AGREED that the Surety shall be liable under this obligation as Principal. The Surety will not be discharged or released from liability for any act, omission, or defenses of any kind or nature that would not also discharge the Principal.



IT IS HEREBY FURTHER DECLARED AND AGREED that this obligation shall be binding upon and inure to the benefit of the Principal, the Surety, the Port, the beneficiaries of the trust fund created by RCW 60.28 and their respective heirs, executors, administrators, successors, and assigns.

IN WITNESS WHEREOF, said Principal and said Surety have caused these presents to be duly signed and sealed this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

\_\_\_\_\_  
By: \_\_\_\_\_  
Principal

Address: \_\_\_\_\_

City/ST/Zip: \_\_\_\_\_

Phone: \_\_\_\_\_

\_\_\_\_\_  
Surety Name: \_\_\_\_\_

By: \_\_\_\_\_  
Attorney-In-Fact

Address: \_\_\_\_\_

City/ST/Zip: \_\_\_\_\_

Phone: \_\_\_\_\_

**IMPORTANT:** Surety companies executing bonds must have an A.M. Best Rating of "A-, FSC (6)" or higher, and be authorized to transact business in the State of Washington.

**END OF SECTION**

**To:** Bank Name, Address, Phone \_\_\_\_\_ Escrow Account No.: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_ Contract No.: 071399  
\_\_\_\_\_ Project No.: 201111.01  
\_\_\_\_\_ Project Title: WUT Admin & Marine Building Roof Project

**Agency:** Port of Tacoma  
\_\_\_\_\_  
PO Box 1837  
\_\_\_\_\_  
Tacoma, WA 98401-1837  
\_\_\_\_\_

This Retainage Escrow Agreement (the "Agreement") is made and entered into as of \_\_\_\_\_, 20\_\_\_\_, by and among \_\_\_\_\_ ("Contractor"), with an address of \_\_\_\_\_, the Port of Tacoma (the "Port") and \_\_\_\_\_ ("Bank").

Contractor has directed the Port to deliver to Bank its retainage warrants or checks, which shall be payable to Bank and the Contractor jointly. Such warrants or checks are to be held in a restricted deposit account as described above (the "Pledged Account") and disbursed by Bank only in accordance with this Agreement and Chapter 60.28 RCW, and upon the terms and conditions hereinafter set forth.

NOW, THEREFORE, in consideration of the mutual covenants contained herein, the parties hereto agree as follows:

1. The Port shall deliver to Bank from time to time checks or warrants payable jointly to Bank and the Contractor. Bank is hereby authorized by the Contractor to endorse in the Contractor's name any such check or warrant so that Bank may receive the proceeds thereof and invest the same and deposit such proceeds into the Pledged Account. The power of endorsement hereby granted to Bank by the Contractor shall be deemed a power coupled with an interest and shall be irrevocable during the term of this Agreement. Although Bank may be a payee named in such warrants or checks as shall be delivered to Bank, Bank's duties and responsibilities with respect to the same shall be only those duties and responsibilities that a depository bank would have pursuant to a control agreement among the Bank, the Port, and Contractor, as such agreement may exist in a form satisfactory to the Port and Article 4 of the Uniform Commercial Code of the State of Washington, as amended, for an item deposited with Bank for collection. For the purpose of each such purchase, Bank may follow the last written direction received by Bank from the Contractor, provided such direction otherwise conforms with the restrictions on investments recited herein. Below is a list of such bonds and other securities approved by the Port (the "Securities"). Other securities, except stocks, may be selected by the Contractor, subject to the express prior written approval of the Port, in its sole and absolute discretion. Purchase of such Securities shall be in a form which shall allow the Bank alone to reconvert such Securities into money if Bank is required to do so by the Administrator as provided in Paragraph 5 of this Agreement. The investments selected by the Contractor, as approved by the Port and purchased by Bank, must mature on or prior to the completion date of the contract between the Contractor and the Port, including extensions thereof (the "Contract").
2. As security for the completion of the Project and satisfaction of the Contract, Contractor hereby pledges, assigns, hypothecates, and transfers to the Port, the Pledged Assets (as defined below) and grants to the Port a security interest under the Uniform Commercial Code of the State of Washington,

as amended, in and to the Pledged Assets. This Agreement creates and grants a valid, perfected first priority lien on the Pledged Assets, enforceable as such against all creditors of Contractor. Contractor covenants and agrees with the Port that it will not (a) sell, assign, transfer, exchange, or otherwise dispose of, or grant any option with respect to, the Pledged Assets, (b) create, incur, or permit to exist any lien or option in favor of, or any claim of any person with respect to, any of the Pledged Assets, or any interest therein, except for the lien provided for by this Agreement, (c) withdraw any money, securities or property from the Pledged Account, except as provided herein, or (d) attempt to modify or terminate Contractor's the agreement under which the Pledged Account was established.

Contractor will defend the right, title, and security interest of the Port in and to the Pledged Assets against the claims and demands of all persons. "Pledged Assets" means the Pledged Account, now or hereafter constituted, including (i) all credit balances or other money now or hereafter credited to the Pledged Account; (ii) all money, certificated and uncertificated securities, commodities contracts, instruments, documents, general intangibles, financial assets or other investment property now or hereafter in, or distributed from, the Pledged Account; (iii) all income, products and proceeds of the sale, exchange, redemption or exercise of the foregoing, whenever occurring, whether as dividends, interest payments or other distributions of cash or property, including, without limitation, proceeds in the nature of accounts, general intangibles, and insurance proceeds; (iv) any rights incidental to the ownership of the foregoing, such as voting, conversion and registration rights and rights of recovery for securities violations; and (v) all books and records pertaining to the foregoing.

3. When an interest on the Securities accrues and is paid, Bank shall collect such interest and forward it to the Contractor at the address designated below unless otherwise directed in writing by the Contractor.
4. Bank is not authorized to deliver to the Contractor all or any part of the Securities (or any monies derived from the sale of such Securities, or the negotiation of the Port's warrants or checks) except in accordance with Chapter 60.28 RCW based on written instructions from the Senior Contract Administrator for the Port (the "Administrator"). The Administrator shall inform the Bank and keep the Bank informed in writing of the name of the person or persons with authority to give the Bank such written instructions. Compliance with such instructions shall relieve Bank of any further liability related thereto. The estimated completion date on the Contract underlying this Agreement is \_\_\_\_\_. Upon request by Bank, the Port shall advise Bank in writing of any material change in the estimated Contract completion date. If such estimated completion date is changed, Bank is authorized to reinvest the monies held hereunder in accordance with the new estimated completion date.
5. In the event the Administrator orders Bank to do so in writing, and notwithstanding any other provisions of this Agreement, Bank shall, within ten (10) days of receipt of such order, reconvert into money the Securities and return such money together with any other monies, including accrued interest on such Securities to the Port. Consent of Contractor shall not be required for payment to the Port hereunder, and objection or other communication from Contractor shall not prevent, delay, or otherwise affect payment to the Port forthwith in accordance with the Port's order and this Agreement.
6. The Contractor agrees to pay Bank as compensation for Bank's services hereunder as follows:  
  
Payment of all fees shall be the sole responsibility of the Contractor and shall not be deducted from any checks, moneys, Securities, or other property placed with Bank or held by Bank pursuant to this Agreement until and unless the Port directs the release thereof to the Contractor, whereupon Bank

shall be granted a first lien upon such property released and shall be entitled to reimburse Bank from such property for the entire amount of Bank's fees as provided for hereinabove. In the event that Bank is made a party to any litigation with respect to the checks, moneys, Securities, or other property held by Bank hereunder, or in the event that the conditions of this escrow are not promptly fulfilled or that Bank is required to render any service not provided for in these instructions, or that there is any assignment of the interests of this escrow or any modification hereof, Bank shall be entitled to reasonable compensation for such extraordinary services from the Contractor and reimbursement from the Contractor for all costs and expenses, including reasonable attorney fees occasioned by such default, delay, controversy, or litigation.

7. Should Bank at any time and for any reason desire to be relieved of Bank's obligation as escrow holder hereunder, Bank shall give written notice to the Port and the Contractor. The Port and Contractor shall, within twenty (20) days of the receipt of such notice, jointly appoint a successor escrow holder and instruct Bank to deliver all securities and funds held hereunder to said successor. If Bank is not notified of the appointment of the successor escrow holder within twenty (20) days, Bank may return the subject matter hereof to the Port, and upon so doing, it absolves Bank from all further charges and obligations in connection with this Agreement.
8. Any one or more of the following events constitutes an Event of Default ("Event of Default") under this Agreement: (i) Contractor breaches the Contract; (ii) Contractor fails to perform any covenant or obligation under this Agreement; (iii) Contractor shall file a voluntary petition in bankruptcy or such a petition shall be filed against Contractor; and (iv) a court of competent jurisdiction shall enter an order, judgment or decree approving a petition filed against Contractor seeking any reorganization, dissolution or similar relief under any present or future federal, state or other statute, law or regulation relating to bankruptcy, insolvency or other relief for debtors.
9. Upon the occurrence of an Event of Default, the Port may exercise, in addition to all other rights and remedies granted in this Agreement, all rights and remedies of a secured party under the Uniform Commercial Code of the State of Washington, as amended. Without limiting the generality of the foregoing, the Port, without demand of performance or other demand, presentment, protest, advertisement, or notice of any kind (except any notice required by law, this Agreement) to or upon Contractor or any other person (all and each of which demands, defenses, advertisements and notices are hereby waived to the extent not prohibited by law), may, upon the occurrence of an Event of Default, collect, receive, appropriate, and realize upon the Pledged Assets, or any part thereof, and/or may forthwith withdraw from the Pledged Account, sell, assign, give option or options to purchase or otherwise dispose of and deliver the Pledged Assets or any part thereof (or contract to do any of the foregoing).
10. This Agreement shall not be binding until executed by the Contractor and the Port and accepted by Bank.
11. This instrument contains the entire agreement between Bank, the Contractor, and the Port with respect to this Agreement and Bank is not a party to nor bound by any instrument or agreement other than this; Bank shall not be required to take notice or demand nor be required to take any action whatever, except as herein expressly provided; Bank shall not be liable for any loss or damage not caused by Bank's own negligence or willful misconduct.

12. The foregoing provisions shall be binding upon the assigns, successors, personal representatives and heirs of the parties hereto.
13. This Agreement is subject to the laws of the State of Washington and is to be construed in accordance therewith.
14. Any legal action or proceeding with respect to this Agreement may be brought in the courts of the State of Washington or in the courts of the United States for the Western District of Washington, and by execution and delivery of this Agreement, Contractor consents, for itself and in respect of its property, to the nonexclusive jurisdiction of those courts. Contractor irrevocably waives any objection, including any objection to the laying of venue or based on the grounds of forum non conveniens, which it may now or hereafter have to the bringing of any action or proceeding in such jurisdiction in respect of this Agreement or any document related hereto.
15. The Contractor's Federal Income Tax Identification number is \_\_\_\_\_.

The undersigned have read and hereby approve this Agreement on the date first set forth above.

**Contractor:**

**Port of Tacoma:**

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Name/Title

\_\_\_\_\_  
Name/Port Treasurer or Deputy Treasurer

\_\_\_\_\_  
Date

\_\_\_\_\_  
Date

The above escrow instructions received and accepted this \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

**Bank:** By: \_\_\_\_\_ Name: \_\_\_\_\_  
(Signature of Authorized Bank Officer) Title: \_\_\_\_\_

**SECURITIES AUTHORIZED BY THE PORT:**

1. FDIC insured time deposits and time deposits in commercial banks authorized by the Washington State Public Deposit Protection Commission;
2. Savings account deposits in commercial banks authorized by the Washington State Public Deposit Protection Commission;
3. Bills, certificates, notes, or bonds of the United States;
4. Other obligations of the United States or its agencies; and
5. Obligation of any corporation wholly-owned by the government of the United States.

**INSTRUCTIONS FOR RETAINAGE ESCROW AGREEMENTS:**

Whenever possible, use the Port approved Escrow Agreement. The Port, at its discretion, may or may not accept an agreement form from another source.

Please return all three (3) originals of the Agreement, with completed contractor and bank information and signatures, and the escrow account number. The Port will review and sign the Agreement and distribute copies. One (1) original will go directly to the Bank, one (1) original will be returned to the Contractor.

Fill in the following on the Escrow Agreement:

1. Page 1 – Escrow Account Number
2. Page 1 – Name, address, and phone number of the Bank
3. Page 4 – Signature, typed/printed name, date, and the title of the Contractor Signatory
4. Page 4 – Signature, typed/printed name, date, and the title of the Authorized Bank Officer signatory

Do not fill in the date in the introductory paragraph. The Port will fill in this date once the document has been fully executed by the Port.

**END OF SECTION**

<b>TABLE OF CONTENTS</b>		<b>PAGE</b>
<b>ARTICLE 1 - THE CONTRACT DOCUMENTS .....</b>		<b>3</b>
1.01 GENERAL .....		3
1.02 DEFINITIONS .....		3
1.03 INTENT OF THE CONTRACT DOCUMENTS .....		4
1.04 CORRELATION OF THE CONTRACT DOCUMENTS .....		4
1.05 OWNERSHIP OF THE CONTRACT DOCUMENTS .....		5
<b>ARTICLE 2 - PORT OF TACOMA .....</b>		<b>5</b>
2.01 AUTHORITY OF THE ENGINEER .....		5
2.02 ADMINISTRATION OF THE CONTRACT .....		5
2.03 INFORMATION PROVIDED BY THE PORT .....		6
2.04 CONTRACTOR REVIEW OF PROJECT INFORMATION .....		6
2.05 PORT'S RIGHT TO REJECT, STOP, AND/OR CARRY-OUT THE WORK .....		7
2.06 SEPARATE CONTRACTORS .....		7
2.07 OFFICERS AND EMPLOYEES OF THE PORT .....		7
<b>ARTICLE 3 - CONTRACTOR'S RESPONSIBILITIES .....</b>		<b>7</b>
3.01 DUTY TO PERFORM THE ENTIRE WORK .....		7
3.02 OBSERVED ERRORS, INCONSISTENCIES, OMISSIONS OR VARIANCES IN THE CONTRACT DOCUMENTS .....		7
3.03 SUPERVISION AND RESPONSIBILITY FOR SUBCONTRACTORS .....		8
3.04 MATERIALS AND EQUIPMENT .....		8
3.05 CONTRACTOR WARRANTIES .....		8
3.06 REQUIRED WAGES .....		9
3.07 STATE AND LOCAL TAXES .....		9
3.08 PERMITS, LICENSES, FEES, AND ROYALTIES .....		10
3.09 SAFETY .....		10
3.10 CORRECTION OF WORK .....		10
3.11 UNCOVERING OF WORK .....		11
3.12 RELOCATION OF UTILITIES .....		11
3.13 LABOR .....		12
3.14 INDEMNIFICATION .....		12
3.15 WAIVER OF CONSEQUENTIAL DAMAGES .....		13
<b>ARTICLE 4 - SUBCONTRACTORS AND SUPPLIERS .....</b>		<b>13</b>
4.01 RESPONSIBILITY FOR ACTIONS OF SUBCONTRACTORS AND SUPPLIERS .....		13
4.02 AWARD OF CONTRACTS TO SUBCONTRACTORS AND SUPPLIERS .....		13
4.03 SUBCONTRACTOR AND SUPPLIER RELATIONS .....		14
<b>ARTICLE 5 - WORKFORCE AND NON-DISCRIMINATION REQUIREMENTS .....</b>		<b>15</b>
5.01 COMPLIANCE WITH NON-DISCRIMINATION LAWS .....		15
5.02 MWBE, VETERAN-OWNED, AND SMALL BUSINESS ENTERPRISE PARTICIPATION ...		15
5.03 APPRENTICESHIP PARTICIPATION .....		15
<b>ARTICLE 6 - CONTRACT TIME AND COMPLETION .....</b>		<b>16</b>
6.01 CONTRACT TIME .....		16
6.02 PROGRESS AND COMPLETION .....		16
6.03 SUBSTANTIAL COMPLETION .....		17
6.04 COMPLETION OF PUNCH LIST .....		17

6.05	FINAL COMPLETION .....	17
6.06	FINAL ACCEPTANCE .....	18
6.07	PORT'S RIGHT TO USE THE PREMISES .....	18
<b>ARTICLE 7 - PAYMENT .....</b>		<b>18</b>
7.01	ALL PAYMENTS SUBJECT TO APPLICABLE LAWS AND SCHEDULE OF VALUES.....	18
7.02	APPLICATIONS FOR PAYMENT .....	19
7.03	PROGRESS PAYMENTS .....	19
7.04	PAYMENT BY CONTRACTOR TO SUBCONTRACTORS .....	19
7.05	FINAL PAYMENT .....	19
7.06	RETAINAGE .....	20
7.07	DISPUTED AMOUNTS .....	21
7.08	EFFECT OF PAYMENT .....	21
7.09	LIENS .....	21
<b>ARTICLE 8 - CHANGES IN THE WORK .....</b>		<b>21</b>
8.01	CHANGES IN THE WORK .....	21
8.02	CHANGES IN THE CONTRACT SUM .....	23
8.03	CHANGES IN THE CONTRACT TIME .....	26
8.04	RESERVATION OF RIGHTS .....	27
8.05	UNIT PRICES .....	27
<b>ARTICLE 9 - SUSPENSION AND TERMINATION OF CONTRACT .....</b>		<b>27</b>
9.01	PORT'S RIGHT TO SUSPEND WORK .....	27
9.02	TERMINATION OF CONTRACT FOR CAUSE BY THE PORT .....	28
9.03	TERMINATION OF CONTRACT FOR CONVENIENCE BY THE PORT .....	28
9.04	TERMINATION OF CONTRACT BY THE CONTRACTOR .....	28
9.05	SUBCONTRACT ASSIGNMENT UPON TERMINATION .....	29
<b>ARTICLE 10 - BONDS .....</b>		<b>29</b>
10.01	CONTRACTOR PERFORMANCE AND PAYMENT BONDS .....	29
<b>ARTICLE 11 - DISPUTE RESOLUTION .....</b>		<b>30</b>
11.01	NOTICE OF PROTEST AND CLAIM .....	30
11.02	MEDIATION .....	31
11.03	LITIGATION .....	32
<b>ARTICLE 12 - MISCELLANEOUS .....</b>		<b>32</b>
12.01	GENERAL .....	32
12.02	WAIVER .....	32
12.03	GOVERNING LAW .....	33
12.04	COMPLIANCE WITH LAW .....	33
12.05	ASSIGNMENT .....	33
12.06	TIME LIMIT ON CAUSES OF ACTION .....	33
12.07	SERVICE OF NOTICE .....	33
12.08	RECORDS .....	34
12.09	STATUTES .....	34



## **ARTICLE 1 - THE CONTRACT DOCUMENTS**

### **1.01 GENERAL**

- A. Contract Documents form the Contract. The Contract Documents are enumerated in the Agreement between the Port and Contractor ("Agreement"). Together, the Contract Documents form the Contract. The Contract represents the entire integrated agreement between the parties and supersedes all prior negotiations, representations, or agreements, either written or oral. The Contract may be amended or modified only in writing and only as set forth in the Contract Documents.
- B. Headings only for convenience. The titles or headings of the sections, divisions, parts, articles, paragraphs, and subparagraphs of the Contract Documents are intended only for convenience.

### **1.02 DEFINITIONS**

- A. "Contract Documents" proposed for the Work consist of the Agreement, the General Conditions of the Contract (as well as any Supplemental, Special, or other conditions included in the Project Manual), the Drawings, the Specifications, and all Addenda issued prior to, and all modifications issued after, execution of the Contract.
- B. "Contractor" means the person or entity contracting to perform the Work under these Contract Documents. The term Contractor includes the Contractor's authorized representative for purposes of identifying obligations and responsibilities under the Contract Documents, including the ability to receive notice and direction from the Port.
- C. "Day" means a calendar day unless otherwise specifically designated.
- D. "Drawings" are the graphic and pictorial portions of the Contract Documents showing the design, location, and dimensions of the Work, including plans, elevations, sections, details, and diagrams.
- E. "Engineer" is the Port employee generally tasked with administering the Project on the Port's behalf and the person with overall responsibility for managing, for the Port, the Project scope, budget, and schedule. To the extent empowered, the Engineer may delegate to others at the Port (such as a Project Manager or Inspector) the responsibility for performing delegated responsibilities of the Engineer's under this Contract.
- F. "Port" means the Port of Tacoma. The Port will designate in writing a representative (usually the Engineer) who shall have the authority to act on the Port's behalf related to the Project. The "Port" does not include staff, maintenance, or safety workers, or other Port employees or consultants that may contact the Contractor or be present at the Project site.
- G. "Project" is identified in the Agreement and is the total construction to be performed by or through the Port, of which the Work performed under the Contract Documents may be only a part.
- H. "Specifications" are those portions of the Contract Documents that specify the written requirements for materials, equipment, systems, standards, and workmanship for the Work and for the performance of related services.
- I. "Subcontractor" means a person or entity that contracts directly with the Contractor to perform any Work under the Contract Documents. "Subcontractor of any tier" includes Subcontractors as well as any other person or entity, including suppliers, that contracts with a Subcontractor or a lower-tier Subcontractor (also referred to as "Sub-subcontractors") to perform any of the Work.
- J. "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all labor, tools, equipment, materials, services,

and incidentals necessary to complete all obligations under the Contract Documents. The Work may constitute only a part of the Project, and may interface and need to be coordinated with the work of others.

### 1.03 INTENT OF THE CONTRACT DOCUMENTS

- A. Intent of Contract Documents. The intent of the Contract Documents is to describe the complete Work and to include all items and information necessary for the proper execution and completion of the Work by the Contractor.
- B. Contract Documents are complementary. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor is required to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results.
- C. No third party contract rights. The Contract Documents shall not create a contractual relationship of any kind (1) between the Port and a Subcontractor of any tier (although the Port does not waive any third-party beneficiary rights it may otherwise have as to Subcontractors of any tier), (2) between the Contractor and the Engineer or other Port employees or consultants, or (3) between any persons or entities other than the Port and Contractor.

### 1.04 CORRELATION OF THE CONTRACT DOCUMENTS

- A. Precedence. In the event of a conflict or discrepancy between or among the Contract Documents, the conflict or discrepancy will be resolved by the following order of precedence: with an addendum or Change Order having precedence over an earlier document, and computed dimensions having precedence over scaled dimensions, and large scale drawings take precedence over small scale drawings:
  - 1. The signed Agreement
    - a. Supplemental Conditions
    - b. Division 00 General Conditions
    - c. Division 01 General Requirements of Specifications
    - d. All other Specifications, including all remaining divisions, material and system schedules and attachments, and Drawings
    - e. All other sections in Division 00 not specifically identified herein by Section
- B. Inconsistency between or among Contract Documents. If there is any inconsistency between the Drawings, schedules, or Specifications, or any attachments, the Contractor will make an inquiry to the Engineer to determine how to proceed, and, unless otherwise directed, the Contractor will provide the better quality or greater quantity of any work or materials, as reasonably interpreted by the Port, at no change in the Contract Sum or Contract Time. Thus, if Work is shown on Drawings, but not contained in Specifications or schedules, or contained in Specifications or schedules, but not shown on the Drawings, the Work as shown or contained will be provided at no change in the Contract Sum or Contract Time, according to Specifications or Drawings to be issued by the Port.
- C. Inconsistency with law. In the event of a conflict between the Contract Documents and applicable laws, codes, ordinances, regulations, or orders of governmental authorities having jurisdiction over the Work, or in the event of any conflict between such laws, the most stringent requirements govern.
- D. Organization of Contract Documents. The organization of the Specifications and Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the

extent of the Work to be performed. The Port assumes no responsibility for the division and proper coordination of Work between particular Subcontractors.

- E. Bid quantities are estimates only. Any "bid quantities" set forth in the Contract Documents are estimates only. The Port does not warrant that the actual amount of Work will correspond to any estimates. The basis of payment will be the actual quantities performed in accordance with the Contract Documents.

#### 1.05 OWNERSHIP OF THE CONTRACT DOCUMENTS

- A. Port owns all Contract Documents. All Drawings, Specifications, and other Contract Documents furnished to the Contractor are Port property, and the Port retains all intellectual property rights, including copyrights. The Contract Documents are to be used only with respect to the Project.

### ARTICLE 2 - PORT OF TACOMA

#### 2.01 AUTHORITY OF THE ENGINEER

- A. Engineer will be Port's representative. The Engineer or the Engineer's designee will be the Port's representative during the Project and will administer the Project on the Port's behalf.
- B. Engineer may enforce all obligations. The Engineer has the authority to enforce all requirements imposed on the Contractor by the Contract Documents.
- C. Only Engineer is agent of Port. Other than the Engineer, no other Port employee or consultant is an agent of the Port, and none are authorized to agree on behalf of the Port to changes in the Contract Sum or Contract Time, nor to waive provisions of the Contract Documents, nor to direct the Contractor to take actions that change the Contract Sum or Contract Time, nor to accept notice of protests or claims on behalf of the Port.

#### 2.02 ADMINISTRATION OF THE CONTRACT

- A. Port will administer Contract. The Port will provide administration of the Contract through the Engineer or the Engineer's designee. All communications with the Port or its consultants related to the Contract will be through the designated representative.
- B. Port not responsible for means and methods. The Port is not responsible for, and will have no control or charge of, the means, methods, techniques, sequences, or procedures of construction, or for safety precautions or programs incidental thereto, because these are the sole responsibility of the Contractor. If the Port makes any suggestion of means, methods, techniques, sequences, or procedures, the Contractor will exercise its independent judgment in deciding whether to adopt the suggestion, except as otherwise provided in the Contract Documents.
- C. Port not responsible for acts or omissions of Contractor or Subcontractors. The Port is not responsible for, and will have no control or charge of, the acts or omissions of the Contractor, Subcontractors of any tier, suppliers, or any of their agents or employees, or any other persons performing a portion of the Work.
- D. Port not responsible for the Work. The Port is not responsible for the Contractor's failure to carry out the Work in accordance with the Contract Documents. The presence of the Engineer or others at the Project site at any time does not relieve the Contractor from its responsibility for non-conforming Work.
- E. Port will have access to the Work. The Port and its representatives will at all times have access to the Work in progress, and the Contractor will provide proper facilities for such access and for inspection.

### 2.03 INFORMATION PROVIDED BY THE PORT

- A. Port to furnish information with reasonable promptness. The Port shall furnish information and services required of the Port by the Contract Documents with reasonable promptness.
- B. Subsurface investigation. The Port may have undertaken a limited investigation of the soil and other subsurface conditions at the Project site for design purposes only. The results of these investigations will be available for the convenience of the Contractor, but they are not Contract Documents. There is no warranty or guarantee, express or implied, that the conditions indicated are representative of those existing at the site or that unforeseen developments may not occur. The Contractor is solely responsible for interpreting the information.

### 2.04 CONTRACTOR REVIEW OF PROJECT INFORMATION

- A. Contractor to familiarize itself with site and conditions of Work. Prior to executing the Contract, the Contractor shall visit the site, become generally familiar with local conditions under which the Work is to be performed, and correlate personal observations with the requirements of the Contract Documents and all information provided with the Bid Documents. By signing the Contract, the Contractor confirms that the Contract Sum is reasonable compensation for the Work; that the Contract Time is adequate; that it has carefully examined the Contract Documents and the Project site; and that it has satisfied itself as to the nature, location, and character of the Work, the labor, materials, equipment, and other items required and all other requirements of the Contract Documents. The Contractor's failure fully to acquaint itself with any such condition does not relieve the Contractor from the responsibility for performing the Work in accordance with the Contract Documents, within the Contract Time, and for the Contract Sum.
- B. Contractor to review Contract Documents. Because the Contract Documents are complementary, the Contractor will, before starting each portion of the Work, carefully study and compare the various Drawings, Specifications, and other Contract Documents, as well as all information furnished by the Port.
- C. Contractor to confirm field conditions. Before starting each portion of the Work, the Contractor shall take field measurements of and verify any existing conditions, including all Work in place, and all general reference points; shall observe any conditions at the site affecting the Contractor; and shall carefully compare field measurements, conditions and other information known to the Contractor with the Contract Documents.

### 2.05 PORT'S RIGHT TO REJECT, STOP, AND/OR CARRY-OUT THE WORK

- A. Port may reject Work. The Port has the authority, but not the obligation, to reject work, materials, and equipment that is defective or that otherwise does not conform to the Contract Documents, and to decide questions concerning the Contract Documents. However, the failure to so reject, or the presence of the Port at the site, shall not be construed as assurance that the Work is acceptable or being completed in compliance with the Contract Documents.
- B. Port may stop Work. If the Contractor fails to correct Work that does not comply with the requirements of the Contract Documents, or repeatedly or materially fails to properly carry out the Work, the Port may issue an order to stop all or a portion of the Work until the cause for the order has been eliminated. The Port's right to stop the Work shall not impose a duty on the Port to exercise this right for the benefit of the Contractor or any third party.
- C. Port may carry-out Work. If the Contractor fails to perform the Work properly, fails to perform any provision of this Contract, or fails to maintain the Baseline Project Schedule, or if the Port reasonably concludes that the Work will not be completed in the specified manner or within the Contract Time, then the Port may, after three (3) days' written notice to the Contractor and without prejudice to any other remedy the Port may have, perform itself or have performed any

or all of the Work and may deduct the cost thereof from any payment then or later due the Contractor.

## 2.06 SEPARATE CONTRACTORS

- A. Port may engage separate contractors or perform work with its own forces. The Port may contract with other contractors ("Separate Contractor") in connection with the Project or perform work with its own forces. The Contractor shall coordinate and cooperate with any Port forces or Separate Contractors, as applicable. The Contractor shall provide reasonable opportunity for the introduction and storage of materials and the execution of work by others.
- B. Contractor to inspect work of others. If any part of the Contractor's Work depends on the work of the Port or any Separate Contractor, the Contractor shall inspect and promptly report to the Port, in writing, any defects that impact the Contractor. Failure of the Contractor to so inspect and report defects in writing shall constitute an acceptance by Contractor of the work of the Port or Separate Contractor.
- C. Contractor to resolve claims of others. Should the Contractor, or any of its Subcontractors of any tier, cause damage of any kind, including but not limited to delay, to any Separate Contractor, the Contractor shall promptly, and using its best efforts, settle or otherwise resolve the dispute with the Separate Contractor. The Contractor shall also promptly remedy damage caused to completed or partially completed construction.

## 2.07 OFFICERS AND EMPLOYEES OF THE PORT

- A. No personal liability. Officers, employees, and representatives of the Port, including the Commissioners, acting within the scope of their employment, shall not be personally liable to Contractor for any acts or omissions arising out of the Project.

# ARTICLE 3 - CONTRACTOR'S RESPONSIBILITIES

## 3.01 DUTY TO PERFORM THE ENTIRE WORK

- A. Contractor must perform entire Work in accordance with Contract Documents. The Contractor shall perform the entire Work required by the Contract in accordance with the Contract Documents. Unless otherwise specifically provided, the Contractor shall provide and pay for all labor, tools, equipment, materials, electricity, power, water, other utilities, transportation, and other facilities necessary for the execution and completion of the Work.
- B. Contractor shall be independent contractor. The Contractor shall be, and operate as, an independent contractor in the performance of the Work. The Contractor is not authorized to enter into any agreements or undertakings for, or on behalf of, the Port and is not an agent or employee of the Port.

## 3.02 OBSERVED ERRORS, INCONSISTENCIES, OMISSIONS, OR VARIANCES IN THE CONTRACT DOCUMENTS

- A. Contractor to notify Port of any discrepancy. The Contractor's obligations to review and carefully study the Contract Documents and field conditions are for the purpose of facilitating coordination and construction. If the Contractor at any time observes that the Contract Documents, including Drawings and Specifications, vary from the conditions of the Project site, are in error, or omit any necessary detail, the Contractor shall promptly notify the Engineer in writing through a Request for Information. Any Work done after such observation, until authorized by the Engineer, shall be at Contractor's risk. The Contractor shall also promptly report to the Engineer any observed error, inconsistency, omission, or variance with applicable laws through a Request for Information. If the Contractor fails either to carefully study and compare the Contract Documents, or to promptly report any observed error, inconsistency, omission, or variance, the Contractor shall assume full responsibility and shall bear all costs,

liabilities, and damages attributable to the error, inconsistency, omission, or variance.

- B. Requests for Information. The Contractor shall submit Requests for Information concerning the Contract Documents by following the procedure and using such form as the Port may require. The Contractor shall minimize Requests for Information by thoroughly studying the Contract Documents and reviewing all Subcontractor requests. The Contractor shall allow adequate time in its planning and scheduling for a response from the Port to a Request for Information.
- C. Port may provide information to supplement Drawings and Specifications. Minor items of work or detail that are omitted from the Drawings and Specifications, but inferable from the information presented and normally provided by accepted good practice, shall be provided and/or performed by the Contractor as part of the Contract Sum and within the Contract Time. Similarly, the Engineer may furnish to the Contractor additional Drawings and clarifications, consistent with the Contract Documents, as necessary to detail and illustrate the Work. The Contractor shall conform its Work to such additional Drawings and clarifications at no increase in the Contract Sum or Contract Time.

### 3.03 SUPERVISION AND RESPONSIBILITY FOR SUBCONTRACTORS

- A. Contractor responsible for Work and workers. The Contractor shall have complete control of the means, methods, techniques, sequences, or procedures related to the Work, and for all safety precautions or programs. The Contractor shall have complete control over, and responsibility for, all personnel performing the Work. The Contractor is also responsible for the acts and omissions of the Contractor's principals, employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors of any tier.
- B. Contractor to supervise the Work. The Contractor shall continuously supervise and direct the Work using competent and skilled personnel and the Contractor's best skill and attention.
- C. Contractor to enforce discipline and good order. The Contractor shall enforce strict discipline and good order among all workers on the Project, and shall not employ any unfit person or anyone not skilled in the work to which they are assigned. Incompetent, careless, or negligent workers shall immediately be removed from the Work. The Port may, but is not obligated to, require the Contractor to remove from the Work, at no change in the Contract Sum or Contract Time, anyone whom the Port considers objectionable.

### 3.04 MATERIALS AND EQUIPMENT

- A. Material and equipment to be new. All materials and equipment to be incorporated into the Work shall be new, unless specifically provided otherwise in the Contract Documents. The Contractor shall, if required in writing by the Port, furnish satisfactory evidence regarding the kind and quality of any materials, identify the source, and warrant compliance with the Contract Documents. The Contractor shall ensure that all materials and equipment are protected, kept dry, and stored under cover in a manner to protect such materials and equipment.
- B. Material and equipment shall conform to manufacturer instructions. All materials and equipment shall conform, and shall be applied, installed, used, maintained, and conditioned in accordance with the instructions of the applicable manufacturer, fabricator, or processor, unless otherwise specifically provided by the Engineer.

### 3.05 CONTRACTOR WARRANTIES

- A. Work will be of good quality and performed in workmanlike manner. In addition to any specific warranties set forth in the Contract Documents, the Contractor warrants that the Work, including all materials and equipment furnished under the Contract, will be of good quality and new, will be performed in a skillful and workmanlike manner, and will conform to the requirements of the Contract Documents. Any Work not conforming to this warranty, including unapproved or

unauthorized substitutions, shall be considered defective.

- B. Work will be free from defects. The Contractor warrants that the Work will be free from defects for a period of one (1) year from the date of Substantial Completion of the Project.
- C. Contractor to collect and deliver warranties to Port. The Contractor shall collect and deliver to the Port any written warranties required by the Contract Documents. These warranties shall be obtained and enforced by the Contractor for the benefit of the Port without the necessity of separate assignment. These warranties shall extend to the Port all rights, claims, benefits, and interests that the Contractor may have under express or implied warranties or guarantees against a Subcontractor of any tier, supplier, or manufacturer for defective or non-conforming Work. Warranty provisions that purport to limit or alter the Port's rights under the Contract Documents, or the laws of the State of Washington, are null and void.
- D. General requirements. The Contractor is not relieved of its general warranty obligations by the specification of a particular product or procedure in the Contract Documents. Warranties in the Contract Documents shall survive completion, acceptance, and final payment.

### 3.06 REQUIRED WAGES

- A. Contractor will pay required wages. The Contractor shall pay (and shall ensure that all Subcontractors of any tier pay) all prevailing wages and other wages (such as Davis-Bacon Act wages) applicable to the Project. See Specification Section 00 73 46.
- B. The Contractor shall defend (at Contractor's sole cost, with legal counsel approved by Port), indemnify, and hold the Port harmless from all liabilities, obligations, claims, demands, damages, disbursements, lawsuits, losses, fines, penalties, costs, and expenses, whether direct or indirect, and including, but not limited to, attorneys' fees and consultants' fees and other costs and expenses of litigation, from any violation or alleged violation by the Contractor or any Subcontractor of any tier of RCW 39.12 ("Prevailing Wages on Public Works") or Chapter 51 RCW ("Industrial Insurance").

### 3.07 STATE AND LOCAL TAXES

- A. Contractor will pay taxes on consumables. The Contractor will pay the retail sales tax on all consumables used during performance of the Work and on all items that are not incorporated into the final Work; this tax shall be included in the Contract Sum.
- B. Port will pay taxes on the Contract Sum. The Port will pay state and local retail sales tax on the Contract Sum with each progress payment, and on final payment, for transmittal by the Contractor to the Washington State Department of Revenue or to the applicable local taxing authority. Rule 170: WAC 458-20-170.
- C. Direct all tax questions to the Department of Revenue. The Contractor should direct all questions concerning taxes on any portion of the Work to the State of Washington Department of Revenue or to the local taxing authority.
- D. State Sales Tax - Rule 171: WAC 458-20-171. For work performed related to building, repairing, or improving streets, roads, etc., which are owned by a municipal corporation, or political subdivision of the state, or by the United States, and which are used, primarily, for foot or vehicular traffic, the Contractor shall include Washington State Retail Sales Taxes in the various schedule prices, or other contract amounts, including those that the Contractor pays on the purchase of materials, equipment, or supplies used or consumed in doing the Work.
  - 1. The bid form will indicate which bid items are subject to Rule 171. Any such identification by the Port is not binding upon the Department of Revenue.

### 3.08 PERMITS, LICENSES, FEES, AND ROYALTIES

- A. Contractor to provide and pay for permits unless otherwise specified. Unless otherwise specified, the Contractor shall procure and pay for all permits, licenses, and governmental inspection fees necessary or incidental to the performance of the Work. All costs related to these permits, licenses, and inspections shall be included in the Contract Sum. Any action taken by the Port to assist the Contractor in obtaining permits or licenses shall not relieve the Contractor of its sole responsibility to obtain and pay for permits, licenses, and inspections as part of the Contract Sum.
- B. Contractor's obligations when permit must be in Port's name. When applicable law or agency requires a permit to be issued to a public agency, the Port will support the Contractor's request for the permit and accept the permit in the Port's name, if:
  - 1. The Contractor takes all necessary steps required for the permit to be issued;
  - 2. The permit applies to Work performed in connection with the Project; and
  - 3. The Contractor agrees in writing to abide by all requirements of the permit and to defend and hold harmless the Port from any liability in connection with the permit.
- C. Contractor to pay royalties. The Contractor shall pay all royalties and license fees required for the Work unless otherwise specified in the Contract Documents.

### 3.09 SAFETY

- A. Contractor solely responsible for safety. The Contractor shall be solely responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the Work and the performance of the Contract.
- B. Port not responsible for safety. The Port may identify safety concerns to the Contractor; however, no action or inaction of the Port or any third party relating to safety will: (1) relieve the Contractor of its sole and complete responsibility for safety and sole liability for any consequences, (2) impose any obligation on the Port or a third party to inspect or review the Contractor's safety program or precautions, (3) impose any continuing obligation on the Port or a third party to ensure the Contractor performs the Work safely, or (4) affect the Contractor's responsibility for the protection of property, workers, and the general public.
- C. Contractor to maintain a safe Work site. The Project site may be occupied during performance of the Work. The safety of these site occupants is of paramount importance to the Port. The Contractor shall maintain the Work site and perform the Work in a safe manner and in accordance with the Washington Industrial Safety and Health Act (WISHA) and all other applicable safety laws, rules, and regulations. This requirement shall apply continuously and not be limited to working hours.
- D. Contractor to protect Work site and adjacent property until Final Completion. The Contractor shall continuously protect the Work and adjacent property from damage. At all times until Final Completion, the Contractor shall be responsible for, and protect from damage, weather, deterioration, theft, and vandalism, the Work and all materials, equipment, tools, and other items incorporated or to be incorporated in the Work, and shall repair any damage, injury, or loss.

### 3.10 CORRECTION OF WORK

- A. Contractor to correct defective Work. The Contractor shall, at no cost to the Port, promptly correct Work that is defective or that otherwise fails to conform to the requirements of the Contract Documents. Such Work shall be corrected, whether before or after Substantial Completion, and even if it was previously inspected or observed by the Port.



- B. One-year correction period. The Contractor shall correct all defects in the Work appearing within one (1) year of Substantial Completion or within any longer period prescribed by law or by the Contract Documents. The Contractor shall initiate remedial action within fourteen (14) days of receipt of notice from the Port and shall complete remedial work within a reasonable time. Work corrected by the Contractor shall be subject to the provisions of this Section 3.10 for an additional one-year period following the Port's acceptance of the corrected Work.
- C. Contractor responsible for defects and failures to correct. The Contractor shall be responsible for any expenses incurred by the Port resulting from defects in the Work. If the Contractor refuses or neglects to correct the defects, or does not timely accomplish corrections, the Port may correct the Work and charge the Contractor the cost of the corrections. If damage or loss of service may result from a delay in correction, the corrections may be made by the Port and reimbursed by the Contractor.
- D. Port may accept defective work. The Port may, at its sole option, elect to retain defective or nonconforming Work. In such a case, the Port shall reduce the Contract Sum by a reasonable amount to account for the defect or non-conformance.
- E. No period of limitation established. Nothing contained in this Section 3.10 establishes a period of limitation with respect to any obligations under the Contract Documents or law. The establishment of the one (1) year correction period relates only to the specific obligation of the Contractor to correct defective or non-conforming Work.

### 3.11 UNCOVERING OF WORK

- A. Contractor to uncover work covered prior to inspection. If any portion of the Work is covered prior to inspection and approval, the Contractor shall, at its expense, uncover or remove the Work for inspection by the Port or others, and replace the Work to the standard required by the Contract Documents.
- B. Contractor to uncover work at Port's request. After initial inspection and observation, the Port may order a reexamination of Work, and the Work must be uncovered by the Contractor. If the uncovered Work complies with the Contract Documents, the Port shall pay the cost of reexamination and replacement. If the Work is found not to comply with the Contract Documents, the Contractor shall pay the cost of replacement, unless the Contractor demonstrates that it did not cause the defect in the Work.

### 3.12 RELOCATION OF UTILITIES

- A. Contractor should assume underground utilities are in approximate locations. The Contractor should assume that the locations of any underground or hidden utilities, underground tanks, and plumbing or electrical runs indicated in surveys or the Contract Documents are shown in approximate locations. The accuracy of this information is not guaranteed by the Port and shall be verified by the Contractor. The Contractor shall comply with RCW 19.122.030 and utilize a utility locator service to locate utilities on Port property. The Contractor shall bear the risk of loss if any of its Work directly or indirectly damages or interrupts any utility service or causes or contributes to damages of any nature.
- B. Utility relocation or removal. Where relocation or removal of utilities is necessary or required, it shall be performed at the Contractor's sole expense, unless the Contract Documents specify otherwise. If a utility owner is identified as being responsible for relocating or removing utilities, the work will be accomplished at the utility owner's convenience, either during, or in advance of, construction. Unless otherwise specified, it shall be the Contractor's sole responsibility to coordinate, schedule, and pay for work performed by a utility owner.

- C. Contractor to notify Port of unknown utilities. If the Contractor discovers the presence of any unknown utilities, it shall immediately notify the Engineer in writing.

### 3.13 LABOR

- A. Contractor responsible for labor peace. The Contractor is responsible for labor peace relating to the Work and shall cooperate in maintaining Project-wide labor harmony. The Contractor shall use its best efforts as an experienced contractor to adopt and implement policies and practices designed to avoid work stoppages, slowdowns, disputes, or strikes.
- B. Contractor to minimize impact of labor disputes. The Contractor will take all necessary steps to prevent labor disputes from disrupting or otherwise interfering with access to Port property. If a labor dispute disrupts the progress of the Work or interferes with access, the Contractor shall promptly and expeditiously take all necessary action to eliminate or minimize the disruption or interference.

### 3.14 INDEMNIFICATION

- A. Duty to defend, indemnify, and hold harmless. To the fullest extent permitted by law and subject to this Section 3.14, the Contractor shall defend (at the Contractor's sole cost, with legal counsel approved by Port), indemnify, and hold harmless the Port and the Northwest Seaport Alliance, including their respective Commissions, officers, managers, and employees, the Engineer, any consultants, and the agents and employees, successors and assigns of any of them (the "Indemnified Parties") from and against claims, damages, lawsuits, losses (including loss of use), disbursements, liabilities, obligations, fines, penalties, costs, and expenses, whether direct and indirect or consequential, including but not limited to, consultants' fees, and attorneys' fees incurred on such claims and in proving the right to indemnification ("Claims"), arising out of, or resulting from, the acts or omissions of the Contractor, a Subcontractor of any tier, their agents, and anyone directly or indirectly employed by any of them or anyone for whose acts they may be liable (individually and collectively, the "Indemnitor").
- B. Duty to defend, indemnify, and hold harmless for sole negligence. The Contractor will fully defend, indemnify, and hold harmless the Indemnified Parties for the sole negligence or willful misconduct of the Indemnitor.
- C. Duty to defend, indemnify, and hold harmless for concurrent negligence. Where Claims arise from the concurrent negligence of (1) the Port; and (2) the Indemnitor, the Contractor's obligations to indemnify and defend the Indemnified Parties under this Section 3.14 shall be effective only to the extent of the Indemnitor's negligence.
- D. Duty to indemnify not limited by workers' compensation or similar employee benefit acts. In claims against any of the Indemnified Parties by an employee of the Contractor, a Subcontractor of any tier, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification obligation under this Section 3.14 shall not be limited by a limitation on amount or type of damages, compensation, or benefits payable under workers' compensation acts, disability benefit acts, or other employee benefit acts. After mutual negotiation of the parties, the Contractor waives immunity as to the Indemnified Parties under Title 51 RCW, "Industrial Insurance."
- E. Intellectual property indemnification. The Contractor will be liable for and shall defend (at the Contractor's sole cost, with legal counsel approved by Port), indemnify, and hold the Indemnified Parties harmless for Claims for infringement by the Contractor of copyrights or patent rights arising out of, or relating to, the Project.
- F. Labor peace indemnification. If the Contractor fails to satisfy its labor peace obligations under the Contract, the Contractor will be liable for and shall defend (at the Contractor's sole cost, with

legal counsel approved by Port), indemnify, and hold harmless the Indemnified Parties for Claims brought against the Port by third parties (including but not limited to lessees, tenants, contractors, customers, licensees, and invitees of the Port) for injunctive relief or monetary loss.

- G. Cyber risk indemnification. Contractor shall defend, indemnify, and hold harmless the Indemnified Parties from and against any liability, expense, fines, penalties, cost, demand, or other obligation, resulting from or out of any cyber-related risk that includes theft, loss or misuse of data, release of private information as result of a network breach, penetration, compromise, or loss of IT systems control.
- H. Joinder. The Contractor agrees to being added by the Port as a party to any arbitration or litigation with third parties in which the Port alleges indemnification or seeks contribution from the Indemnitor. The Contractor shall cause each of its Subcontractors of any tier to similarly stipulate in their subcontracts; in the event any does not, the Contractor shall be liable in place of such Subcontractor(s) of any tier.
- I. Other. To the extent that any portion of this Section 3.14 is stricken by a court or arbitrator for any reason, all remaining provisions shall retain their vitality and effect. The obligations of the Contractor under this Section 3.14 shall not be construed to negate, abridge, or otherwise reduce any other right or obligations of indemnity which would otherwise exist. To the extent the wording of this Section 3.14 would reduce or eliminate an available insurance coverage, it shall be considered modified to the extent necessary so that the insurance coverage is not affected. This Section 3.14 shall survive completion, acceptance, final payment, and termination of the Contract.

### 3.15 WAIVER OF CONSEQUENTIAL DAMAGES

- A. Mutual waiver of consequential damages. The Contractor and Port waive claims against each other for consequential damages arising out of, or relating to, this Contract. This mutual waiver includes, but is not limited to: (1) damages incurred by the Port for rental expenses, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons, and (2) damages incurred by the Contractor for principal and home office overhead and expenses including, but not limited to, the compensation of personnel stationed there, for losses of financing, business, and reputation, for losses on other projects, for loss of profit, and for interest or financing costs. This mutual waiver includes, but is not limited to, all consequential damages due to either party's termination.
- B. Limitation. Nothing contained in this Section 3.15; however, shall be deemed to preclude an award of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents, to preclude damages specified in the Agreement, or to affect the Contractor's obligation to indemnify the Port for direct, indirect, or consequential damages alleged by a third party.

## ARTICLE 4 - SUBCONTRACTORS AND SUPPLIERS

### 4.01 RESPONSIBILITY FOR ACTIONS OF SUBCONTRACTORS AND SUPPLIERS.

- A. Contractor responsible for Subcontractors. The Contractor is fully responsible to the Port for the acts and omissions of its Subcontractors of any tier and all persons either directly or indirectly employed by the Contractor or its Subcontractors.

### 4.02 AWARD OF CONTRACTS TO SUBCONTRACTORS AND SUPPLIERS

- A. Contractor to provide proposed Subcontractor information. The Contractor, within ten (10) days after the Port's notice of award of the Contract, shall provide the Engineer with the names of the persons or entities proposed to perform each of the principal portions of the Work (i.e., either a Subcontractor listed in a bid or proposal or a Subcontractor performing Work valued at least ten

percent (10%) of the Contract Sum) and the proprietary names, and the suppliers of, the principal items or systems of materials and equipment proposed for the Work. No progress payment will become due until after this information has been furnished.

- B. Port to respond promptly with objections. The Port may respond promptly to the Contractor in writing stating: (1) whether the Port has reasonable objection to any proposed person or entity, or (2) whether the Port requires additional time for review. If the Port makes a reasonable objection, the Contractor shall replace the Subcontractor with no increase to the Contract Sum or Contract Time. Such a replacement shall not relieve the Contractor of its responsibility for the performance of the Work and compliance with all of the requirements of the Contract within the Contract Sum and Contract Time.
- C. Reasonable objection defined. "Reasonable objection" as used in this Section 4.02 includes, but is not limited to: (1) a proposed Subcontractor of any tier different from the entity listed with the bid, (2) lack of "responsibility" of the proposed Subcontractor, as defined by Washington law and the Bidding Documents, or lack of qualification or responsibility of the proposed Subcontractor based on the Contract or Bidding Documents, or (3) failure of the Subcontractor to perform satisfactorily in the Port's opinion (such as causing a material delay or submitting a claim that the Port considers inappropriate) on one or more projects for the Port within five (5) years of the bid date.
- D. No substitution allowed without permission. The Contractor shall not substitute a Subcontractor, person, or organization without the Engineer's written consent.

#### 4.03 SUBCONTRACTOR AND SUPPLIER RELATIONS

- A. Contractor to schedule, supervise, and coordinate Subcontractors. The Contractor shall schedule, supervise, and coordinate the operations of all Subcontractors of any tier, including suppliers. The Contractor shall ensure that appropriate Subcontractors coordinate the Work of lower-tier Subcontractors.
- B. Subcontractors to be bound to Contract Documents. By appropriate agreement, the Contractor shall require each Subcontractor and supplier to be bound to the terms of the Contract Documents and to assume toward the Contractor, to the extent of their Work, all of the obligations that the Contractor assumes toward the Port under the Contract Documents. Each subcontract shall preserve and protect the rights of the Port and shall allow to the Subcontractor, unless specifically provided in the subcontract, the benefit of all rights, remedies, and redress against the Contractor that the Contractor, by the Contract Documents, has against the Port. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with lower-tier Subcontractors.
- C. Contractor to correct deficiencies in Subcontractor performance. When a portion of the Work subcontracted by the Contractor is not being prosecuted in accordance with the Contract Documents, or if such subcontracted Work is otherwise being performed in an unsatisfactory manner in the Port's opinion, the Contractor shall, on its own initiative or upon the written request of the Port, take immediate steps to correct the deficiency or remove the non-performing party from the Project. The Contractor shall replace inadequately performing Subcontractors upon request of the Port at no change in the Contract Sum or Contract Time.
- D. Contractor to provide subcontracts. Upon request, the Contractor will provide the Port copies of written agreements between the Contractor and any Subcontractor.

## **ARTICLE 5 - WORKFORCE AND NON-DISCRIMINATION REQUIREMENTS**

### **5.01 COMPLIANCE WITH NON-DISCRIMINATION LAWS**

- A. Contractor to comply with non-discrimination laws. The Contractor shall fully comply with all applicable laws, regulations, and ordinances pertaining to non-discrimination.

### **5.02 MWBE, VETERAN-OWNED, AND SMALL BUSINESS ENTERPRISE PARTICIPATION.**

- A. In accordance with the legislative findings and policies set forth in RCW 39.19, the Port encourages participation in all of its contracts by MWBE firms certified by the Office of Minority and Women's Business Enterprises (OMWBE). Participation may be either on a direct basis in response to this invitation or as a subcontractor to a Bidder. However, unless required by federal statutes, regulations, grants, or contract terms referenced in the Contract Documents, no preference will be included in the evaluation of Bids, no minimum level of MWBE participation shall be required as a condition for receiving an award, and Bids will not be rejected or considered non-responsive on that basis. Any affirmative action requirements set forth in federal regulations or statutes included or referenced in the Contract Documents will apply.

The Port encourages participation in all of its contracts by Veteran-owned businesses (defined in RCW 43.60.010) and located at <http://www.dva.wa.gov/program/certified-veteran--and-servicemember-owned-businesses> and Small, Mini, and Micro businesses (defined in RCW 39.26.010)

### **5.03 APPRENTICESHIP PARTICIPATION**

- A. In accordance with RCW 39.04.320, fifteen (15) percent Apprenticeship Participation is required for all projects estimated to cost one million (\$1,000,000) dollars or more.
- B. Apprentice participation, under this contract, may be counted towards the required percentage (%) only if the apprentices are from an apprenticeship program registered and approved by the Washington State Apprenticeship and Training Council (RCW 49.04 and WAC 296-05).
- C. Bidders may contact the Department of Labor and Industries, Specialty Compliance Services Division, Apprenticeship Section, P.O. Box 44530, Olympia, WA 98504-4530 by phone at (360) 902-5320, or e-mail at [Apprentice@lni.wa.gov](mailto:Apprentice@lni.wa.gov), to obtain information on available apprenticeship programs.
- D. For each project that has apprentice requirements, the contractor shall submit a "Statement of Apprentice and Journeyman Participation" on forms provided by the Port of Tacoma, with every request for project payment. The Contractor shall submit consolidated and cumulative data collected by the Contractor and collected from all subcontractors by the Contractor. The data to be collected and submitted includes the following:
  - 1. Contractor name and address
  - 2. Contract number
  - 3. Project name
  - 4. Contract value
  - 5. Reporting period "Beginning Date" through "End Date"
  - 6. Name and registration number of each apprentice by contractor
  - 7. Total number of apprentices and labor hours worked by them, categorized by trade or craft.
  - 8. Total number of journeymen and labor hours worked by them, categorized by trade or craft

- 9. Cumulative combined total of apprentice and journeymen labor hours
- 10. Total percentage of apprentice hours worked
- E. No changes to the required percentage (%) of apprentice participation shall be allowed without written approval of the Port. In any request for the change, the Contractor shall clearly demonstrate a good faith effort to comply with the requirements for apprentice participation.

## **ARTICLE 6 - CONTRACT TIME AND COMPLETION**

### **6.01 CONTRACT TIME**

- A. Contract Time is measured from Contract execution. Unless otherwise provided in the Agreement, the Contract Time is the period of time, including authorized adjustments, specified in the Contract Documents from the date the Contract is executed to the date Substantial Completion of the Work is achieved.
- B. Commencement of the Work. The Contractor shall begin Work in accordance with the notice of award and the notice to proceed and shall complete all Work within the Contract Time. When the Contractor's signed Agreement, required insurance certificate with endorsements, bonds, and other submittals required by the notice of award have been accepted by the Port, the Port will execute the Contract and, following receipt of other required pre-work submittals, will issue a notice to proceed to allow the Contractor to mobilize and commence physical Work at the Project site, as further described in these contract documents. No Work at the Project site may commence until the Port issues a notice to proceed.
- C. Contractor shall achieve specified completion dates. The Contractor shall achieve Substantial Completion within the Contract Time and shall achieve Final Completion within the time period thereafter stated in the Contract Documents.
- D. Time is of the essence. Time limits stated in the Contract Documents, including any interim milestones, are of the essence of the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

### **6.02 PROGRESS AND COMPLETION**

- A. Contractor to maintain schedule. The Contractor's sequence and method of operations, application of effort, and work force shall at all times be created and implemented to ensure the orderly, expeditious, and timely completion of the Work and performance of the Contract. The Contractor shall furnish sufficient forces and shall work such hours, including extra shifts, overtime operations, and weekend and holiday work as may be necessary to ensure completion of the Work within the Contract Time and the approved Baseline Project Schedule.
- B. Contractor to take necessary steps to meet schedule. If the Contractor fails substantially to perform in a timely manner in accordance with the Contract Documents and, through the fault of the Contractor or Subcontractor(s) of any tier, fails to meet the Baseline Project Schedule, the Contractor shall take such steps as may be necessary to immediately improve its progress by increasing the number of workers, shifts, overtime operations, or days of work, or by other means and methods, all without additional cost to the Port. If the Contractor believes that any action or inaction of the Port constitutes acceleration, the Contractor shall immediately notify the Port in writing and shall not accelerate the Work until the Port either directs the acceleration in writing or denies the constructive acceleration.
- C. Liquidated damages not exclusive. Any provisions in the Contract Documents for liquidated damages shall not preclude other damages due to breaches of Contract of the Contractor.

### 6.03 SUBSTANTIAL COMPLETION

- A. Substantial Completion defined. Substantial Completion is the stage in the progress of the Work, or portion or phase thereof, when the Work or designated portion is sufficiently complete in accordance with the Contract Documents so that the Port can fully occupy or utilize the Work, or the designated portion thereof, for its intended use, all requirements in the Contract Documents for Substantial Completion have been achieved, and all required documentation has been properly submitted to the Port in accordance with the Contract Documents. All Work, other than incidental corrective or punch list Work and final cleaning, must be completed. The fact that the Port may occupy the Work or a designated portion thereof does not indicate that Substantial Completion has occurred or that the Work is acceptable in whole or in part.
- B. Work not Substantially Complete unless Final Completion attainable. The Work is not Substantially Complete unless the Port reasonably judges that the Work can achieve Final Completion within the period of time specified in the Contract Documents.
- C. Notice of Substantial Completion. When the Work or designated portion has achieved Substantial Completion, the Port will provide a notice to establish the date of Substantial Completion. The notice shall establish responsibilities of the Port and Contractor for security, maintenance, heat, utilities, damage to the Work, and insurance, and shall fix the time within which the Contractor shall finish all remaining Work. If the notice of Substantial Completion does not so state, all responsibility for the foregoing items shall remain with the Contractor until Final Completion.

### 6.04 COMPLETION OF PUNCH LIST

- A. Contractor shall complete punch list items prior to Final Completion. The Contractor shall cause punch list items to be completed prior to Final Completion. If, after Substantial Completion, the Contractor does not expeditiously proceed to correct punch list items or if the Port considers that the punch list items, are unlikely to be completed prior to the date established for Final Completion (or such other period of time as is specified in the Contract Documents), the Port may, upon seven (7) days' written notice to the Contractor, take over and perform some or all of the punch list items. The Port may also take over and complete any portion of the Work at any time following Substantial Completion and deduct the actual cost of performing the Work (including direct and indirect costs) from the Contract Sum. The Port's rights under this Section 6.04 are not obligations and shall not relieve the Contractor of its responsibilities under any other provisions of the Contract Documents.

### 6.05 FINAL COMPLETION

- A. Final Completion. Upon receipt of written notice from the Contractor that all punch list items and other Contract requirements are completed, the Contractor will notify the Port, and the Port will perform a final inspection. If the Port determines that some or all of the punch list items have not been addressed, the Contractor shall be responsible to the Port for all costs, including re-inspection fees, for any subsequent reviews to determine completion of the punch list. When the Port determines that all punch list items have been satisfactorily addressed, that the Work is acceptable under the Contract Documents, and that the Work has fully been performed, the Port will promptly notify the Contractor of Final Completion.
- B. Contractor responsible for costs if Final Completion is not timely achieved. In addition to any liquidated damages, the Contractor is liable for, and the Port may deduct from any amounts due the Contractor, all costs incurred by the Port for services performed after the contractual date of Final Completion, whether or not those services would have been performed prior to that date had Final Completion been timely achieved.

- C. Final Completion submittals. The Port is not obligated to accept the Project as complete until the Contractor has submitted all required submittals to the Port.
- D. Contractor responsible for the Work until Final Completion. The Contractor shall assume the sole risk of loss and responsibility for all Work under the Contract, and all materials to be incorporated in the Work, whether in storage or at the Project site, until Final Completion. Damage from any cause to either permanent or temporary Work, utilities, materials, equipment, existing structures, the site, or other property owned by the Port or others, shall be repaired by the Contractor to the reasonable satisfaction of the Port at no change in the Contract Sum.

#### 6.06 FINAL ACCEPTANCE

- A. Final Acceptance. Final Acceptance is the formal action of the Port accepting the Project as complete. Public notification of Final Acceptance will be posted on the Port's external website (<http://www.portoftacoma.com/final-acceptance>).
- B. Final Acceptance not an acceptance of defective Work. Final Acceptance shall not constitute acceptance by the Port of unauthorized or defective Work, and the Port shall not be prevented from requiring the Contractor to remove, replace, repair, or dispose of unauthorized or defective Work or recovering damages due to the same.
- C. Completion of Work under RCW 60.28. Pursuant to RCW 60.28, "Lien for Labor, Materials, Taxes on Public Works," completion of the Contract Work shall occur upon Final Acceptance.

#### 6.07 PORT'S RIGHT TO USE THE PREMISES

- A. Port has right to use and occupy Work. The Port reserves the right to occupy or use any part of the Work before or after Substantial Completion of some or all of the Work without relieving the Contractor of any of its obligations under the Contract. Such occupancy or use shall not constitute acceptance by the Port of any of the Work, and shall not cause any insurance to be canceled or lapse.
- B. No compensation due if Port elects to use and occupy Work. No additional compensation shall be due to the Contractor as a result of the Port's use or occupancy of the Work or a designated portion.

### ARTICLE 7 - PAYMENT

#### 7.01 ALL PAYMENTS SUBJECT TO APPLICABLE LAWS AND SCHEDULE OF VALUES

- A. Payment of the Contract Sum. The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Port to the Contractor for performance of the Work under the Contract Documents. Payments made to the Contractor are subject to all laws applicable to the Port and the Contractor. Payment of the Contract Sum constitutes full compensation to the Contractor for performance of the Work, including all risk, loss, damages, or expense of whatever character arising out of the nature or prosecution of the Work. The Port is not obligated to pay for extra work or materials furnished without prior written approval of the Port.
- B. Schedule of Values. All payments will be based upon an approved Schedule of Values. Prior to submitting its first Application for Payment, the Contractor shall submit a Schedule of Values to the Port allocating the entire Contract Sum to the various portions of the Work. The Schedule of Values shall be prepared in such form, and supported by such data to substantiate its accuracy, as the Port may require. This schedule, unless objected to by the Port, shall be used as a basis for reviewing the Contractor's applications for payment.



## 7.02 APPLICATIONS FOR PAYMENT

- A. Applications for Payment. Progress payments will be made monthly for Work duly certified, approved by the Engineer, and performed (based on the Schedule of Values and actual quantities of Work performed) during the calendar month preceding the Application for Payment. These amounts are paid in trust to the Contractor for distribution to Subcontractors to the extent, and in accordance with, the approved Application for Payment.

## 7.03 PROGRESS PAYMENTS

- A. Progress payments. Following receipt of a complete Application for Payment, the Engineer will either authorize payment or indicate in writing to the Contractor the specific reasons why the payment request is being denied, in whole or in part, and the remedial action the Contractor must take to receive the withheld amount. After a complete Application for Payment has been received and approved by the Port, payment will be made within thirty (30) days. Any payments made by, or through, or following receipt of, payment from third parties will be made in accordance with the third party's policies and procedures.
- B. Port may withhold payment. The Port may withhold payment in whole or in part as provided in the Contract Documents or to the extent reasonably necessary to protect the Port from loss or potential loss for which the Contractor is responsible, including loss resulting from the Contractor's acts and omissions.

## 7.04 PAYMENT BY CONTRACTOR TO SUBCONTRACTORS

- A. Payment to Subcontractors. With each Application for Payment, the Contractor shall provide a list of Subcontractors to be paid by the Contractor. No payment request shall include amounts the Contractor does not intend to pay to a Subcontractor because of a dispute or other reason. If, however, after submitting an Application for Payment, but before paying a Subcontractor, the Contractor discovers that part or all of a payment otherwise due to the Subcontractor is subject to withholding from the Subcontractor under the subcontract (such as for unsatisfactory performance or non-payment of lower-tier Subcontractors), the Contractor may withhold the amount as allowed under the subcontract, but it shall give the Subcontractor and the Port written notice of the remedial actions that must be taken and pay the Subcontractor within eight (8) working days after the Subcontractor satisfactorily completes the remedial action identified in the notice.
- B. Payment certification to be provided upon request. The Contractor shall provide, with each Application for Payment, a certification signed by Contractor attesting that all payments by the Contractor to Subcontractors from the last Application for Payment were made within ten (10) days of the Contractor's receipt of payment. The certification will also attest that the Contractor will make payment to Subcontractors for the current Application for Payment within ten (10) days of receipt of payment from the Port.

## 7.05 FINAL PAYMENT

- A. Final payment. Final applications for payment are due within seven (7) days following Final Completion. Final payment of the unpaid balance of the Contract Sum, except retainage, will be made following Final Completion and within thirty (30) days of the Contractor's submission of an approved final Application for Payment.
- B. Releases required for final payment. The final payment shall not become due until the Contractor delivers to the Port a complete release of all liens arising out of the Contract, as well as an affidavit stating that, to the best of Contractor's knowledge, its release includes all labor and materials for which a lien could be filed. If a Subcontractor of any tier refuses to furnish a release or waiver required by the Port, the Port may (a) retain in the fund, account, or escrow funds in such amount as to defray the cost of foreclosing the liens of such claims and to pay

attorneys' fees, the total of which shall be no less than 150% of the claimed amount, or (b) accept a bond from the Contractor, satisfactory to the Port, to indemnify the Port against the lien. If any such lien remains unsatisfied after all payments from the retainage are made, the Contractor shall refund to the Port all moneys that the Port may be compelled to pay in discharging such lien, including all costs and reasonable attorneys' fees.

- C. Contractor to hold Port harmless from liens. The Contractor shall defend (at the Contractor's sole cost, with legal counsel approved by Port), indemnify, and hold harmless the Port from any liens, claims, demands, lawsuits, losses, damages, disbursements, liabilities, obligations, fines, penalties, costs, and expenses, whether direct or indirect, including but not limited to, attorneys' fees and consultants' fees and other costs and expenses, except to the extent a lien has been filed because of the failure of the Port to make a contractually required payment.

#### 7.06 RETAINAGE

- A. Retainage to be withheld. In accordance with RCW 60.28, a sum equal to five percent (5%) of each approved Application for Payment shall be retained. Prior to submitting its first Application for Payment, the Contractor shall exercise one of the options listed below:
1. Retained percentages will be retained by the Port in a fund; or
  2. Deposited by the Port in an interest-bearing account or escrow account in a bank, mutual savings bank, or savings and loan association designated by the Contractor, not subject to withdrawal until after the final acceptance of said improvement or work as completed, or until agreed to by both parties; provided that interest on such account shall be paid to the Contractor. Contractor to complete and submit Port provided Retainage Escrow Agreement (Section 00 61 23.13); or
  3. If the Contractor provides a bond in place of retainage, it shall be in an amount equal to 5% of the Contract Sum plus Change Orders. The retainage bond shall be based on the form furnished in Section 00 61 23 or otherwise acceptable to the Port and duly completed and signed by a licensed surety or sureties registered with the Washington State Insurance Commissioner and on the currently authorized insurance list published by the Washington State Insurance Commissioner. The surety or sureties must be rated at least "A-, FSC(6)" or higher by A.M. Best Rating Guide and be authorized by the Federal Department of the Treasury. Attorneys-in-fact who sign the retainage bond must file with each bond a certified and effective Power of Attorney statement.
- B. Contractor may withhold retainage from Subcontractors. The Contractor or a Subcontractor may withhold not more than five percent (5%) retainage from the monies earned by any Subcontractor or lower-tier Subcontractor, provided that the Contractor pays interest to the Subcontractor at the same interest rate it receives from its reserved funds. If requested by the Port, the Contractor shall specify the amount of retainage and interest due a Subcontractor.
- C. Release of retainage. Retainage will be withheld and applied by the Port in a manner required by RCW 60.28 and released in accordance with the Contract Documents and statutory requirements. Release of the retainage will be processed in the ordinary course of business within sixty (60) days following Final Acceptance of the Work by the Port provided that no notice of lien has been given as provided in RCW 60.28, that no claims have been brought to the attention of the Port, that the Port has no claims under this Contract, and that release of retention has been duly authorized by the State. The following items must also be obtained prior to release of retainage: pursuant to RCW 60.28, a certificate from the Department of Revenue; pursuant to RCW 50.24, a certificate from the Department of Employment Security; and appropriate information from the Department of Labor and Industries including approved affidavits of wages paid for the Contractor and each subcontractor.

#### 7.07 DISPUTED AMOUNTS

- A. Disputed amounts. If the Contractor believes it is entitled to payment for Work performed during the prior calendar month in addition to the agreed-upon amount, the Contractor may submit to the Port, along with the approved Application for Payment, a separate written payment request specifying the exact additional amount claimed to be due, the category in the Schedule of Values to which the payment would apply, the specific Work for which additional payment is sought, and an explanation of why the Contractor believes additional payment is due.

#### 7.08 EFFECT OF PAYMENT

- A. Payment does not relieve Contractor of obligations. Payment to the Contractor of progress payments or final payment does not relieve the Contractor from its responsibility for the Work or its responsibility to repair, replace, or otherwise make good defective Work, materials, or equipment. Likewise, the making of a payment does not constitute a waiver of the Port's right to reject defective or non-conforming Work, materials, or equipment (even though they are covered by the payment), nor is it a waiver of any other rights of the Port.
- B. Acceptance of final payment waives claims. Acceptance of final payment by the Contractor, a Subcontractor of any tier, or a supplier shall constitute a waiver of claims except those previously made in writing and identified as unsettled in Contractor's final Application for Payment.
- C. Execution of Change Order waives claims. The execution of a Change Order shall constitute a waiver of claims by the Contractor arising out of the Work to be performed or deleted pursuant to the Change Order, except as specifically described in the Change Order.

#### 7.09 LIENS

- A. Contractor to discharge liens. The Contractor shall promptly pay (and secure the discharge of any liens asserted by) all persons properly furnishing labor, equipment, materials, or other items in connection with the performance of the Work including, but not limited to, any Subcontractors of any tier.

### **ARTICLE 8 - CHANGES IN THE WORK**

#### 8.01 CHANGES IN THE WORK

- A. Changes in the Work authorized. Without invalidating the Contract and without notice to the Contractor's surety, the Port may authorize changes in the Work after execution of the Contract, including changes in the Contract Sum or Contract Time. Changes shall occur solely by Change Order, Unilateral Change Directive, or Minor Change in Work. All changes in the Work are effective immediately, and the Contractor shall proceed promptly to perform the change, unless otherwise provided in the Change Order or Directive.
- B. Changes in the Work Defined.
  - 1. A Change Order is a written instrument signed by the Port and Contractor stating their agreement to a change in the Work and the adjustment, if any, in the Contract Sum and/or Contract Time.
  - 2. A Unilateral Change Directive is a written instrument issued by the Port to transmit new or revised Drawings, issue additions or modifications to the Contract, furnish other direction and documents adjustment, if any, to the Contract Sum and/or Contract Time. A Unilateral Change Directive is signed only by the Port, without requiring the consent or signature of the Contractor.

3. A Minor Change in the Work is a written order from the Port directing a change that does not involve an adjustment to the Contract Sum or the Contract Time.
- C. Request for Proposal: At any time, the Port may issue a Proposal Request directing the Contractor to propose a change to the Contract Sum and/or Contract Time, if any, based on a proposed change in the Work. The Contractor shall submit a responsive Change Order proposal as soon as possible, and no later than fourteen (14) days after receipt, in which the Contractor specifies in good faith the extent to which the Contract Sum and/or Contract Time would change. All cost components shall be limited to the manner described in Section 8.02(B). If the Contractor fails to timely respond to a Proposal Request, the Port may issue the change as a Unilateral Change Directive.
1. Fixed price method is default for Contractor Change Order proposal. When the Port has requested that the Contractor submit a Change Order proposal, the Port may specify the basis on which the Contract Sum will be adjusted by the Contractor. The Engineer's preference, unless otherwise indicated, is for changes in the Work to be priced using Lump Sums or Unit Prices or on a time and material (Force Account) basis if unit pricing or lump sums cannot be negotiated or determined. In all instances, however, proposed changes shall include a not-to-exceed price for the change and shall be itemized for evaluation purposes in accordance with Section 8.02(B), as requested by the Engineer.
  2. The Port may accept or reject the Contractor's Change Order proposal, request further documentation, or negotiate acceptable terms with the Contractor. If The Port and Contractor reach agreement on the terms of any change in the Work, including any adjustment in the Contract Sum or Contract Time, such agreement shall be incorporated in a Change Order.
  3. The Change Order shall constitute full payment and final settlement of all claims for time and for direct, indirect, and consequential costs, including costs of delays, inconvenience, disruption of schedule, or loss of efficiency or productivity, related to any Work either covered or affected by the Change Order, or related to the events giving rise to the request for equitable adjustment. The Port may reject a proposal, in which case the Port may either not effectuate the change or issue a Unilateral Change Directive. The Port will not make payment to the Contractor for any work until that work has been incorporated into an executed Change Order.
- D. Unforeseen Conditions: If the Contractor encounters conditions at the site that are: (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or any soils reports made available by the Port to the Contractor, or (2) unknown physical conditions of an unusual nature that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall immediately provide oral notice to the Engineer before conditions are disturbed, followed within 24 hours by an initial written notice. The Contractor shall submit a detailed proposal no later than seven (7) days following discovery of differing site conditions. The Engineer will promptly investigate these conditions and, if the Engineer determines that they differ materially and cause an increase or decrease in the Contractor's cost or time required for performance of any part of the Work, will establish a change in the Contract Sum or Contract Time, or both, consistent with the requirements of the Contract Documents. If the Contractor disputes the Engineer's determination, the Contractor may proceed as provided in the dispute resolution procedure (Article 11). No increase to the Contract Sum or the Contract Time shall be allowed if the Contractor does not comply with the contractual requirements or if the Contractor knew, or reasonably should have known, of the concealed conditions prior to executing the Contract.

- E. Proceed Immediately: Pending agreement on the terms of the Change Order or upon determination of a differing site condition as defined in 8.01(D), the Engineer may direct Contractor to proceed immediately with the change in the Work. Contractor shall not proceed with any change in the Work until it has obtained the Engineer's written approval and documentation of the following:
1. The scope of work
  2. An agreed upon maximum not-to-exceed amount
  3. The method of final cost determination
  4. Estimated time to complete the changed work
  5. As a change in the Work is performed, unless the parties have signed a written Change Order to establish the cost of the change, the Contractor shall maintain an itemized accounting of all costs related to the change based on the categories in Section 8.02(B) and provide such data to the Port upon request. This includes, without limitation, invoices, including freight and express bills, and other support for all material, equipment, Subcontractor, and other charges related to the change and, for material furnished from the Contractor's own inventory, a sworn affidavit certifying the actual cost of such material. Failure to provide data to the Port within seven (7) days of a request constitutes a waiver of any claim. The Port may furnish any material or equipment to the Contractor that it deems advisable, and the Contractor shall have no claim for any costs or fee on such material or equipment.
- F. Procedure for Unilateral Change Directive. Whether or not the Port has rejected a Contractor's proposal, the Port may issue a Unilateral Change Directive and the Contractor shall promptly proceed with the specified Work. If the Contractor disagrees with a Unilateral Change Directive, the Contractor shall advise the Port in writing through a Change Order proposal within seven (7) days of receipt. The Contractor's Change Order proposal shall reasonably specify the reasons for any disagreement and the adjustment it proposes. Without this timely Change Order proposal, the Contractor shall conclusively be deemed to have accepted the Port's proposal.
- G. Payment pending final determination of Force Account work. Pending final determination of the total cost of Force Account Work, and provided that the Work to be performed under Force Account is complete and any reservations of rights have been signed by the Port, the Contractor may request payment for amounts not in dispute in the next Application for Payment accompanied by documentation indicating the parties' agreement. Work done on a Force Account basis must be approved in writing on a daily basis by the Engineer or the Engineer's designee and invoices shall be submitted with an Application for Payment within sixty (60) days of performance of the Work.

## 8.02 CHANGES IN THE CONTRACT SUM

- A. Port to Decide How Changes are Measured. The Port may elect, in its sole discretion, how changes in the Work will be measured for payment. Change in the Work may be priced on a lump sum basis, through Unit Prices, as Force Account, or by another method documented in the executed Change Order, Unilateral Change Directive, or Minor Change in the Work.
- B. Determination of Cost of Change. The total cost of any change in the Work, including a claim under Article 11, shall not exceed the prevailing cost for the Work in the locality of the Project. In all circumstances, the change in the Work shall be limited to the reasonable, actual cost of the following components:
1. Direct labor costs: These are the actual labor costs determined by the number of additional craft hours at their normal hourly rate necessary to perform a change in the Work. The

hourly cost of labor will be based upon the following:

- a. Basic wages and fringe benefits: The hourly wage (without markup or labor burden) and fringe benefits paid by the Contractor as established by the Washington Department of Labor and Industries or contributed to labor trust funds as itemized fringe benefits, whichever is applicable, not to exceed that specified in the applicable "Intent to Pay Prevailing Wage," for the laborers, apprentices, journeymen, and foremen performing or directly supervising the change in the Work on site. These wages do not include the cost of Contractor's project manager or superintendent or above, and the premium portion of overtime wages is not included unless pre-approved in writing by the Port. Costs paid or incurred by the Contractor for vacations, per diem, subsistence, housing, travel, bonuses, stock options, or discretionary payments to employees are not separately reimbursable. The Contractor shall provide to the Port copies of payroll records, including certified payroll statements for itself and Subcontractors of any tier, upon the Port's request.
  - b. Workers' insurance: Direct contributions to the State of Washington as industrial insurance; medical aid; and supplemental pension by class and rates established by the Washington Department of Labor and Industries.
  - c. Federal insurance: Direct contributions required by the Federal Insurance Compensation Act (FICA); Federal Unemployment Tax Act (FUTA); and State Unemployment Compensation Act (SUCA).
2. Direct material costs: This is an itemization, including material invoices, of the quantity and actual cost of additional materials necessary to perform the change in the Work. The cost will be the net cost after all discounts or rebates, freight costs, express charges, or special delivery costs, when applicable. No lump sum costs will be allowed unless approved in advance by the Port.
  3. Construction equipment usage costs: This is an itemization of the actual length of time that construction equipment necessary and appropriate for the Work is used solely on the changed Work times the applicable rental cost as established by the lower of the local prevailing rates published in [www.equipmentwatch.com](http://www.equipmentwatch.com), as modified by the AGC/WSDOT agreement, or the actual rate paid to an unrelated third party. If more than one rate is applicable, the lowest available rate will be utilized. Rates and quantities of equipment rented that exceed the local fair market rental costs shall be subject to the Port's prior written approval. Total rental charges for equipment or tools shall not exceed 75% of the fair market purchase value of the equipment or the tool. Actual, reasonable mobilization costs are permitted if the equipment is brought to the site solely for the change in the Work. Mobilization and standby costs shall not be charged for equipment already present on the site.

The rates in effect at the time of the performance of the changed Work are the maximum rates allowable for equipment of modern design, and in good working condition, and include full compensation for furnishing all fuel, oil, lubrication, repairs, maintenance, and insurance. No gas surcharges are payable. Equipment not of modern design and/or not in good working condition will have lower rates. Hourly, weekly, and/or monthly rates, as appropriate, will be applied to yield the lowest total cost.
  4. Subcontractor costs: These are payments the Contractor makes to Subcontractors for changed Work performed by Subcontractors. The Subcontractors' cost of changed Work shall be determined in the same manner as prescribed in this Section 8.02 and, among other things, shall not include consultant costs, attorneys' fees, or claim preparation expenses.

5. Service provider costs: These are payments the Contractor makes to service providers for changed Work performed by service providers. The service providers' cost of changed Work shall be determined in the same manner as prescribed in this Section 8.02.
6. Markup: This is the maximum total amount for overhead, profit, and other costs, including office, home office and site overhead (including purchasing, project manager, superintendent, project engineer, estimator, and their vehicles and clerical assistants), taxes (except for sales tax on the Contract Sum), warranty, safety costs, printing and copying, layout and control, quality control/assurance, small or hand tools (a tool that costs \$500 or less and is normally furnished by the performing contractor), preparation of as-built drawings, impact on unchanged Work, Change Order and/or claim preparation, and delay and impact costs of any kind (cumulative, ripple, or otherwise), added to the total cost to the Port of any Change Order work. No markup shall be due, however, for direct settlements of Subcontractor claims by the Port after Substantial Completion. The markup shall be limited in all cases to the following schedule:
  - a. Direct labor costs -- 20% markup on the direct cost of labor for the party (Contractor or Subcontractor) providing labor related to the change in the Work;
  - b. Direct material costs -- 20% markup on the direct cost of material for the party (Contractor or Subcontractor) providing material related to the change in the Work;
  - c. Construction equipment usage costs -- 10% markup on the direct cost of equipment for the party (Contractor or Subcontractor) providing equipment related to the change in the Work;
  - d. Contractor markup on Subcontractor costs -- 10% markup for the Contractor on the direct cost (excluding markup) of a change in the Work performed by Subcontractors (and for Subcontractors, for a change in the Work performed by lower-tier Subcontractors); and
  - e. Service provider costs -- 5% markup for the Contractor on the direct cost (excluding markup) of a change in the Work performed by service providers.

The total summed markup of the Contractor and all Subcontractors of any tier shall not exceed 30% of the direct costs of the change in the Work. If the markup would otherwise exceed 30%, the Contractor shall proportionately reduce the markup for the Contractor and all Subcontractors of any tier.
7. Cost of change in insurance or bond premium. This is defined as:
  - a. Contractor's liability insurance: The actual cost (expressed as a percentage submitted with the certificate of insurance provided under the Contract Documents and subject to audit) of the Contractor's liability insurance arising directly from the changed Work; and
  - b. Public works bond: The actual cost (expressed as a percentage submitted under the Contract Documents and subject to audit) of the Contractor's performance and payment bond arising directly from the changed Work.

Upon request, the Contractor shall provide the Port with supporting documentation from its insurer or surety of any associated cost incurred. The cost of the insurance or bond premium together shall not exceed 2.0% of the cost of the changed Work.
8. Unit Prices. If Unit Prices are specified in the Contract Documents or established by agreement of the parties for certain Work, the Port may apply them to the changed Work. Unit Prices shall include pre-agreed rates for material quantities and shall include reimbursement for all direct and indirect costs of the Work, including overhead, profit,

bond, and insurance costs arising out of, or related to, the Unit Priced item. Quantities must be supported by field measurement statements signed by the Port, and the Port shall have access as necessary for quantity measurement. The Port shall not be responsible for not-to-exceed limit(s) without its prior written approval.

### 8.03 CHANGES IN THE CONTRACT TIME

- A. Extension of the Contract Time. If the Contractor is delayed at any time in the commencement or progress of the Work by events for which the Port is responsible, by unanticipated abnormal weather (subject to Section 8.03(E) below), or by other causes not the fault or responsibility of the Contractor that the Port determines may justify a delay in the Contract Time, then the Contract Time shall be extended by Change Order for such reasonable time as the Port may determine. In no event, however, shall the Contractor be entitled to any extension of time absent proof of: (1) delay to an activity on the critical path of the Project, or (2) delay transforming an activity to the critical path, so as to actually delay the anticipated date of Substantial Completion.
- B. Allocation of responsibility for delay not caused by Port or Contractor. If a delay was not caused by the Port, the Contractor, or anyone acting on behalf of any of them, the Contractor is entitled only to an increase in the Contract Time but not an increase in the Contract Sum.
- C. Allocation of responsibility for delay caused by Port. If a delay was caused by the Port or someone acting on behalf of the Port and affected the critical path, the Contractor shall be entitled to a change in the Contract Time and Contract Sum in accordance with Section 8.02. The Contractor shall not recover damages, an equitable adjustment, or an increase in the Contract Sum or Contract Time from the Port; however, where the Contractor could reasonably have avoided the delay. The Port is not obligated directly or indirectly for damages for any delay suffered by a Subcontractor of any tier that does not increase the Contract Time.
- D. Allocation of responsibility for delay caused by Contractor. If a delay was caused by the Contractor, a Subcontractor of any tier, or anyone acting on behalf of any of them, the Contractor is not entitled to an increase in the Contract Time or in the Contract Sum.
- E. Adverse weather. If adverse weather is identified as the basis for a claim for additional time, the claim shall be documented by data substantiating that weather conditions were abnormal for the period of time, could not reasonably have been anticipated and had an adverse effect on the critical path of construction, and that the Work was on schedule (or not behind schedule through the fault of the Contractor) at the time the adverse weather conditions occurred. Neither the Contract Time nor the Contract Sum will be adjusted for normal inclement weather. For a claim based on adverse weather, the Contractor shall be eligible only for a change in the Contract Time (but not a change in the Contract Sum) if the Contractor can substantiate that there was significantly greater than normal inclement weather considering the full term of the Contract Time.
- F. Damages for delay. In the event the Contractor (including any Subcontractors of any tier) is held to be entitled to damages from the Port for delay beyond the amount permitted in Section 8.02(B), the total combined damages to the Contractor and any Subcontractors of any tier for each day of delay shall be limited to the reasonable, actual costs of the delay for which the Port is wholly responsible. The limitation on damages set forth in this Section does not apply to any damages arising exclusively from delay to which the Contractor is entitled to recover under Section 8.03(F).
- G. Limitation on damages. The Contractor shall not be entitled to damages arising out of loss of efficiency; morale, fatigue, attitude, or labor rhythm; constructive acceleration; home office overhead; expectant under run; trade stacking; reassignment of workers; rescheduling of Work, concurrent operations; dilution of supervision; learning curve; beneficial or joint occupancy;



logistics; ripple; season change; extended or increased overhead or general conditions; profit upon damages for delay; impact damages including cumulative impacts; or similar damages. Any effect that such alleged costs may have upon the Contractor or its Subcontractors of any tier is fully compensated through the markup on Change Orders paid through Section 8.02(B).

#### 8.04 RESERVATION OF RIGHTS

- A. Reservations of rights void unless signed by Port. Reservations of rights will be deemed waived and are void unless any reserved rights are described in detail and are signed by the Contractor and the Port.
- B. Procedure for unsigned reservations of rights. If the Contractor adds a reservation of rights not signed by the Port to any Change Order, Unilateral Change Directive, Change Order proposal, Application for Payment, or any other document, all amounts and all Work therein shall be considered disputed and not payable until costs are re-negotiated or the reservation is withdrawn or changed in a manner satisfactory to, and signed by, the Port. If the Port makes payment based on a document that contains a reservation of rights not signed by the Port, and if the Contractor cashes such payment, then the reservation of rights shall be deemed waived, withdrawn, and of no effect.

#### 8.05 UNIT PRICES

- A. Adjustment to Unit Prices. If Unit Prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed (less than eighty percent (80%) or more than one hundred and twenty percent (120%) of the quantity estimated) so that application of a Unit Price would be substantially unfair, the applicable Unit Price but not the Contract Time, shall be adjusted if the Port prospectively approves a Change Order revising the Unit Price.
- B. Procedure to change Unit Prices. The Contractor or Port may request a Change Order revising a Unit Price by submitting information to support the change. A proposed change to a Unit Price will be evaluated by the Port based on the change in cost resulting solely from the change in quantity, any change in production rate or method as compared to the original plan, and the share, if any, of fixed expenses properly chargeable to the item. If the Port and Contractor agree on the change, a Change Order will be executed. If the parties cannot agree, the Contractor shall comply with the dispute resolution procedures (Article 11).

### **ARTICLE 9 - SUSPENSION AND TERMINATION OF CONTRACT**

#### 9.01 PORT'S RIGHT TO SUSPEND WORK

- A. Port may suspend the Work. The Port may at any time suspend the Work, or any part thereof, by giving notice to the Contractor. The Work shall be resumed by the Contractor as soon as possible, but no later than fourteen (14) days after the date fixed in a notice to resume the Work. The Port shall reimburse the Contractor for appropriate and reasonable expenses consistent with Section 8.02 incurred by the Contractor as a result of the suspension, except where a suspension is the result of the Contractor repeatedly or materially failing to carry out or correct the Work in accordance with the Contract Documents, and the Contractor shall take all necessary steps to minimize expenses.
- B. Contractor obligations. During any suspension of Work, the Contractor shall take every precaution to prevent damage to, or deterioration of, the Work. The Contractor shall be responsible for all damage or deterioration to the Work during the period of suspension and shall, at its sole expense, correct or restore the Work to a condition acceptable to the Port prior to resuming Work.

## 9.02 TERMINATION OF CONTRACT FOR CAUSE BY THE PORT

- A. Port may terminate for cause. If the Contractor is adjudged bankrupt or makes a general assignment for the benefit of the Contractor's creditors, if a receiver is appointed due to the Contractor's insolvency, or if the Contractor, in the opinion of the Port, persistently or materially refuses or fails to supply enough properly skilled workmen or materials for proper completion of the Contract, fails to make prompt payment to Subcontractors or suppliers for material or labor, disregards laws, ordinances, or the instructions of the Port, fails to prosecute the Work continuously with promptness and diligence, or otherwise materially violates any provision of the Contract, then the Port, without prejudice to any other right or remedy, may terminate the Contractor after giving the Contractor seven (7) days' written notice (during which period the Contractor shall have the right to cure).
- B. Procedure following termination for cause. Following a termination for cause, the Port may take possession of the Project site and all materials and equipment, and utilize such materials and equipment to finish the Work. The Port may also exclude the Contractor from the Project site(s). If the Port elects to complete all or a portion of the Work, it may do so as it sees fit. The Port shall not be required to accept the lowest bid for completion of the Work and may choose to complete all or a portion of the Work using its own work force. If the Port elects to complete all or a portion of the Work, the Contractor shall not be entitled to any further payment until the Work is finished. If the expense of finishing the Work, including compensation for additional managerial and administrative services of the Port, exceeds the unpaid balance of the Contract Sum, the excess shall be paid by the Contractor.
- C. Port's remedies following termination for cause. The Port may exercise any rights, claims, or demands that the Contractor may have against third persons in connection with the Contract, and for this purpose the Contractor assigns and transfers to the Port all such rights, claims, and demands.
- D. Inadequate termination for cause converted to termination for convenience. If, after the Contractor has been terminated for cause, it is determined that inadequate "cause" for such termination exists, then the termination shall be considered a termination for convenience pursuant to Section 9.03.

## 9.03 TERMINATION OF CONTRACT FOR CONVENIENCE BY THE PORT

- A. Port may terminate for convenience. The Port may, at any time (without prejudice to any right or remedy of the Port), terminate all, or any portion of, the Contract for the Port's convenience and without cause. The Contractor shall be entitled to receive payment consistent with the Contract Documents only for Work properly executed through the date of termination, and costs necessarily incurred by reason of the termination (such as the cost of settling and paying claims arising out of the termination under subcontracts or orders), along with a fee of one percent (1%) of the Contract Sum not yet earned on the whole or part of the Work. The total amount to be paid to the Contractor shall not exceed the Contract Sum as reduced by the amount of payments otherwise made. The Port shall have title to all Work performed through the date of termination.

## 9.04 TERMINATION OF CONTRACT BY THE CONTRACTOR

- A. Contractor may terminate for cause. The Contractor may terminate the Contract if the Work is stopped for a period of sixty (60) consecutive days through no act or fault of the Contractor or a Subcontractor of any tier, for either of the following reasons:
  - 1. Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped; or

2. An act of government, such as a declaration of national emergency, that requires all Work to be stopped.
- B. Procedure for Contractor termination. If one of the reasons described in Section 9.04A exists, the Contractor may, upon seven (7) days' written notice to the Port (during which period the Port has the opportunity to cure), terminate the Contract and recover from the Port payment for Work executed through the date of termination in accordance with the Contract Documents and for proven loss with respect to materials, equipment, tools, and construction equipment and machinery, including reasonable overhead and profit on Work executed and direct costs incurred by reason of such termination. The total recovery of the Contractor shall not exceed the unpaid balance of the Contract Sum.
- C. Contractor may stop the Work for failure of Port to pay undisputed amounts. The Contractor may stop Work under the Contract if the Port does not pay undisputed amounts due and owing to the Contractor within fifteen (15) days of the date established in the Contract Documents. If the Port fails to pay undisputed amounts, the Contractor may, upon fifteen (15) additional days' written notice to the Port, during which the Port can cure, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately, and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shut-down, delay, and start-up.

#### 9.05 SUBCONTRACT ASSIGNMENT UPON TERMINATION

- A. Subcontracts assigned upon termination. Each subcontract is hereby assigned by the Contractor to the Port provided that:
  1. The Port requests that the subcontract be assigned.
  2. The assignment is effective only after termination by the Port and only for those subcontracts that the Port accepts in writing.
  3. The assignment is subject to the prior rights of the surety, if any, under any bond issued in accordance with the Contract Documents.

When the Port accepts the assignment of a subcontract, the Port assumes the Contractor's rights and obligations under the subcontract, but only for events and payment obligations that arise after the date of the assignment.

### ARTICLE 10 - BONDS

#### 10.01 CONTRACTOR PERFORMANCE AND PAYMENT BONDS

- A. Contractor to furnish performance and payment bonds. Within ten (10) days following its receipt of a notice of award, and as part of the Contract Sum, the Contractor shall secure and furnish duly executed performance and payment bonds using the forms furnished by the Port. The bonds shall be executed by a surety (or sureties) reasonably acceptable to the Port, admitted and licensed in the State of Washington, registered with the Washington State Insurance Commissioner, and possessing an A.M. Best rating of "A-, FSC (6)" or better and be authorized by the U.S. Department of the Treasury. Pursuant to RCW 39.08, the bonds shall be in an amount equal to the Contract Sum, and shall be conditioned only upon the faithful performance of the Contract by the Contractor within the Contract Time and upon the payment by the Contractor of all taxes, fees, and penalties to the State of Washington and all laborers, Subcontractors, and suppliers, and others who supply provisions, equipment, or supplies for the performance of the Work covered by this Contract. The bonds shall be signed by the person or persons legally authorized to bind the Contractor.

- B. On contracts of one hundred fifty thousand dollars or less, at the option of the contractor as defined in RCW 39.10.210, the Port may, in lieu of the bond, retain ten percent of the contract amount for a period of thirty days after date of final acceptance, or until receipt of all necessary releases from the department of revenue, the Employment Security Department, and the Department of Labor and Industries and settlement of any liens filed under chapter 60.28 RCW, whichever is later. The recovery of unpaid wages and benefits must be the first priority for any actions filed against retainage held by a state agency or authorized local government.

For contracts of one hundred fifty thousand dollars or less, the Port may accept a full payment and performance bond from an individual surety or sureties.

- C. Port may notify surety. If the Port makes or receives a claim against the Contractor, the Port may, but is not obligated to, notify the Contractor's surety of the nature and amount of the claim. If the claim relates to a possibility of a Contractor's default, the Port may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

## **ARTICLE 11 - DISPUTE RESOLUTION**

### **11.01 NOTICE OF PROTEST AND CLAIM**

- A. Dispute resolution procedure mandatory. All claims, direct or indirect, arising out of, or relating to, the Contract Documents or the breach thereof, shall be decided exclusively by the following alternative dispute resolution procedure, unless the parties mutually agree otherwise. If the Port and Contractor agree to a partnering process to assist in the resolution of disputes, the partnering process shall occur prior to, and not be in place of, the mandatory dispute resolution procedures set forth below.
- B. Notice of protest defined. Except for claims requiring notice before proceeding with the affected Work as otherwise described in the Contract Documents, the Contractor shall provide immediate oral notice of protest to the Engineer prior to performing any disputed Work and shall submit a written notice of protest to the Port within seven (7) days of the occurrence of the event giving rise to the protest that includes a clear description of the event(s). The protest shall identify any point of disagreement, those portions of the Contract Documents believed to be applicable, and an estimate of quantities and costs involved. When a protest relates to cost, the Contractor shall keep full and complete records and shall permit the Port to have access to those records at any time as requested by the Port.
- C. Claim defined. A claim is a demand by one of the parties seeking adjustment or interpretation of the Contract terms, payment of money, extension of time, or other relief with respect to the terms of the Contract Documents. The term "claim" also includes all disputes and matters in question between the Port and Contractor arising out of, or relating to, the Contract Documents. Claims must be initiated in writing and include a detailed factual statement and clear description of the claim providing all necessary dates, locations, and items of Work, the date or dates on which the events occurred that give rise to the claim, the names of employees or representatives knowledgeable about the claim, the specific provisions of the Contract Documents that support the claim, any documents or oral communications that support the claim, any proposed change in the Contract Sum (showing all components and calculations) and/or Contract Time (showing cause and analysis of the resultant delay in the critical path), and all other data supporting the claim. Claims shall also be submitted with a statement certifying, under penalty of perjury, that the claim as submitted is made in good faith, that the supporting cost and pricing data are true and accurate to the best of Contractor's knowledge and belief, that the claim is fully supported, and that the amount requested accurately reflects the adjustment in the Contract Sum or Contract Time for which Contractor believes the Port is liable. A claim shall be deemed to include all changes, direct and indirect, in cost and in time to which the Contractor and Subcontractors of any tier are entitled and may not contain

reservations of rights without the Port's written approval; any unapproved reservations of rights shall be without effect.

- D. Claim procedure. The Contractor shall submit a written claim within thirty (30) days of providing written notice of protest. The Contractor may delay submitting supporting data by an additional thirty (30) days if it notifies the Port in its claim that substantial data must be assembled. Any claim of a Subcontractor of any tier may be brought only through, and after review by and concurrence of, the Contractor.
- E. Failure to comply with notice of protest and claim requirements waives claims. Any notice of protest by the Contractor and any claim of the Contractor, whether under the Contract or otherwise, must be made pursuant to, and in strict accordance with, the applicable provisions of the Contract. Failure to properly and timely submit a notice of protest or to timely submit a claim shall waive the claim. No act, omission, or knowledge, actual or constructive, of the Port shall waive the requirement for timely written notice of protest and a timely written claim, unless the Port and the Contractor sign an explicit, unequivocal written waiver approved by the Port. The Contractor expressly acknowledges and agrees that the Contractor's failure to timely submit required notices of protest and/or timely submit claims has a substantial impact upon, and prejudices, the Port. For the purpose of calculating time periods, an "event giving rise to a claim," among other things, is not a Request for Information, but rather is a response that the Contractor believes would change the Contract Sum and/or Contract Time.
- F. False claims. The Contractor shall not make any fraudulent misrepresentations, concealments, errors, omissions, or inducements to the Port in the formation or performance of the Contract. If the Contractor or a Subcontractor of any tier submits a false or frivolous claim to the Port, which for purposes of this Section 11.01(F) is defined as a claim based in whole or in part on a materially incorrect fact, statement, representation, assertion, or record, the Port shall be entitled to collect from the Contractor by offset or otherwise (without prejudice to any right or remedy of the Port) any and all costs and expenses, including investigation and consultant costs, incurred by the Port in investigating, responding to, and defending against the false or frivolous claim.
- G. Compliance with lien and retainage statutes required. If a claim relates to, or is the subject of, a lien or retainage claim, the party asserting the claim may proceed in accordance with applicable law to comply with the notice and filing deadlines prior to resolution of the claim by mediation or by litigation.
- H. Performance required pending claim resolution. Pending final resolution of a claim, the Contractor shall continue to perform the Contract and maintain the Baseline Project Schedule, and the Port shall continue to make payments of undisputed amounts due in accordance with the Contract Documents.

## 11.02 MEDIATION

- A. Claims must be subject to mediation. At any time following the Port's receipt of a written claim, the Port may require that an officer of the Contractor and the Port's designee (all with authority to settle) meet, confer, and attempt to resolve a claim. If the claim is not resolved during this meeting, the claim shall be subject to mandatory mediation as a condition precedent to the initiation of litigation. This requirement can be waived only by an explicit, written waiver signed by the Port and the Contractor.
- B. Mediation procedure. A request for mediation shall be filed in writing with the other party to the Contract, and the parties shall promptly attempt to agree upon a mediator. If the parties have not reached agreement within thirty (30) days of the request, either party may file the request with the American Arbitration Association, or such other alternative dispute resolution service to which the parties mutually agree, with a copy to the other party, and the mediation shall be

administered by the American Arbitration Association (or other agreed service). The parties to the mediation shall share the mediator's fee and any filing fees equally. The mediation shall be held in Pierce County, Washington, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof. Unless the Port and the Contractor mutually agree in writing otherwise, all claims shall be considered at a mediation session that shall occur prior to Final Completion.

### 11.03 LITIGATION

- A. Claims not resolved by mediation are subject to litigation. Claims not resolved through mediation shall be resolved by litigation, unless the parties mutually agree otherwise. The venue for any litigation shall be Pierce County, Washington. The Contractor may bring no litigation on claims, unless such claims have been properly raised and considered in the procedures of this Article 11. The Contractor must demonstrate in any litigation that it complied with all requirements of this Article.
- B. Litigation must be commenced promptly. All unresolved claims of the Contractor shall be waived and released, unless the Contractor has complied with the requirements of the Contract Documents, and litigation is served and filed within 180 days of the date of Substantial Completion approved in writing by the Port or termination of the Contract. The pendency of mediation (the time period between receipt by the non-requesting party of a written mediation request and the date of mediation) shall toll these deadlines until the earlier of the mediator providing written notice to the parties of impasse, or thirty (30) days after the date of the mediation session.
- C. Port not responsible for attorneys' fees. Neither the Contractor nor a Subcontractor of any tier, whether claiming under a bond or lien statute or otherwise, shall be entitled to attorneys' fees directly or indirectly from the Port (but may recover attorneys' fees from the bond or statutory retainage fund itself to the extent allowable under law).
- D. Port may join Contractor in dispute. The Port may join the Contractor as a party to any litigation or arbitration involving the alleged fault, responsibility, or breach of contract of the Contractor or Subcontractor of any tier.

## ARTICLE 12 - MISCELLANEOUS

### 12.01 GENERAL

- A. Rights and remedies are cumulative. The rights and remedies of the Port set forth in the Contract Documents are cumulative, and in addition to and not in limitation of, any rights and remedies otherwise available to the Port. The pursuit of any remedy by the Port shall not be construed to bar the Port from the pursuit of any other remedy in the event of similar, different, or subsequent breaches of this Contract. All such rights of the Port shall survive completion of the Project or termination of the Contractor.
- B. Reserved rights do not give rise to duty. The rights reserved or possessed by the Port to take any action shall not give rise to a duty for the Port to exercise any such right.

### 12.02 WAIVER

- A. Waiver must be in writing and authorized by Port. Waiver of any provisions of the Contract Documents must be in writing and authorized by the Port. No other waiver is valid on behalf of the Port.
- B. Inaction or delay not a waiver. No action, delay in acting, or failure to act by the Port shall constitute a waiver of any right or remedy of the Port, or constitute an approval or acquiescence of any breach or defect in the Work, nor shall any delay or failure of the Port to act waive or

otherwise prejudice the right of the Port to enforce a right or remedy at any subsequent time.

- C. Claim negotiation not a waiver. The fact that the Port and the Contractor may consider, discuss, or negotiate a claim that has or may have been defective or untimely under the Contract, shall not constitute a waiver of the provisions of the Contract Documents, unless the Port and the Contractor sign an explicit, unequivocal waiver.

#### 12.03 GOVERNING LAW

- A. Washington law governs. This Contract and the rights and duties of the parties hereunder shall be governed by the internal laws of the State of Washington, without regard to its conflict of law principles.

#### 12.04 COMPLIANCE WITH LAW

- A. Contractor to comply with applicable laws. The Contractor shall at all times comply with all applicable Federal, State and local laws, ordinances, and regulations. This compliance shall include, but is not limited to, the payment of all applicable taxes, royalties, license fees, penalties, and duties.
- B. Contractor to provide required notices. The Contractor shall give notices required by all applicable Federal, State and local laws, ordinances, and regulations bearing on the Work.
- C. Contractor to confine operations at site to permitted areas. The Contractor shall confine operations at the Project site to areas permitted by applicable laws, ordinances, permits, rules and regulations, and lawful orders of public authorities and the Contract Documents.

#### 12.05 ASSIGNMENT

- A. Assignment. The Port and Contractor respectively bind themselves, their partners, successors, assigns, and legal representatives to the other party and to the partners, successors, assigns, and legal representatives of such other party. The Contractor may not assign, transfer, or novate all or any portion of the Contract, including but not limited to, any claim or right to the Contract Sum, without the Port's prior written consent. If the Contractor attempts to make an assignment, transfer, or novation without the Port's consent, the assignment shall be of no effect, and Contractor shall nevertheless remain legally responsible for all obligations under the Contract. The Contractor also shall not assign or transfer, to any third party, any claims it may have against the Port arising under the Contract or otherwise related to the Project.

#### 12.06 TIME LIMIT ON CAUSES OF ACTION

- A. Time limit on causes of action. The Port and Contractor shall commence all causes of action, whether in contract, tort, breach of warranty, or otherwise, against the other arising out of, or related to, the Contract in accordance with the requirements of the dispute resolution procedure set forth in Article 11 of these General Conditions, within the time period specified by applicable law, and within the time limits identified in the Contract Documents. The Contractor waives all claims and causes of action not commenced in accordance with this Section 12.06.

#### 12.07 SERVICE OF NOTICE

- A. Notice. Written notice under the Contract Documents by either the Contractor or Port may be served on the other party by personal service, electronic or facsimile transmission, or delivery service to the last address provided in writing to the other party. For the purpose of measuring time, notice shall be deemed to be received by the other party on the next business day following the sender's electronic or facsimile transmittal or delivery by delivery service.

## 12.08 RECORDS

- A. Contractor and Subcontractors to maintain records and cooperate with Port audit. The Contractor and Subcontractors of any tier shall maintain books, ledgers, records, documents, estimates, bids, correspondence, logs, schedules, emails, and other tangible and electronic data and evidence relating or pertaining to costs and/or performance of the Contract ("records") to such extent, and in such detail, as will properly reflect and fully support compliance with the Contract Documents and with all costs, charges, and other amounts of whatever nature. The Contractor shall preserve these records for a period of six (6) years following the date of Final Acceptance under the Contract. Within seven (7) days of the Port's request, both during the Project and for six (6) years following Final Acceptance, the Contractor and Subcontractors of any tier shall make available, at their office during normal business hours, all records for inspection, audit, and reproduction (including electronic reproduction) by the Port or its representatives; failure to fully comply with this requirement shall constitute a material breach of contract and a waiver of all claims by the Contractor and Subcontractors of any tier.
- B. Rights under RCW 42.56. The Contractor agrees, on behalf of itself and Subcontractors of any tier, that any rights under Chapter 42.56 RCW will commence at Final Acceptance, and that the invocation of such rights at any time by the Contractor or a Subcontractor of any tier, or their respective representatives, shall initiate an equivalent right to disclosures from the Contractor and Subcontractors of any tier for the benefit of the Port.

## 12.09 STATUTES

- A. Contractor to comply with Washington statutes. The Contractor shall abide by the provisions of all applicable statutes, regulations, and other laws. Although a number of statutes are referenced in the Contract Documents, these references are not meant to be, and are not, a complete list.
  - 1. Pursuant to RCW 39.06, "Registration, Licensing of Contractors," the Contractor shall be registered and licensed as required by the laws of the State of Washington, including but not limited to RCW 18.27, "Registration of Contractors," and shall satisfy all State of Washington bonding and insurance requirements. The Contractor shall also have a current state Unified Business Identifier number; have industrial insurance coverage for the Contractor's employees working in Washington as required by Title 51 RCW; have an Employment Security Department number as required by Title 50 RCW; have a state excise tax registration number as required in Title 82 RCW; and not be disqualified from bidding on any public works contract under RCW 39.06.010 (unregistered or unlicensed contractors) or RCW 39.12.065(3) (prevailing wage violations).
  - 2. The Contractor shall comply with all applicable provisions of RCW 49.28, "Hours of Labor."
  - 3. The Contractor shall comply with pertinent statutory provisions relating to public works of RCW 49.60, "Discrimination."
  - 4. The Contractor shall comply with pertinent statutory provisions relating to public works of RCW 70.92, "Provisions in Buildings for Aged and Handicapped Persons," and the Americans with Disabilities Act.
  - 5. Pursuant to RCW 50.24, "Contributions by Employers," in general, and RCW 50.24.130 in particular, the Contractor shall pay contributions for wages for personal services performed under this Contract or arrange for an acceptable bond.
  - 6. The Contractor shall comply with pertinent provisions of RCW 49.17, "Washington Industrial Safety and Health Act," and Chapter 296-155 WAC, "Safety Standards for Construction Work."



7. Pursuant to RCW 49.70, "Worker and Community Right to Know Act," and WAC 296-62-054 et seq., the Contractor shall provide to the Port, and have copies available at the Project site, a workplace survey or material safety data sheets for all "hazardous" chemicals under the control or use of Contractor or any Subcontractor of any tier.
8. All products and materials incorporated into the Project as part of the Work shall be certified as "asbestos-free" and "lead-free" by United States standards, and shall also be free of all hazardous materials or substances. At the completion of the Project, the Contractor shall submit certifications of asbestos-free and of lead-free materials certifying that all materials and products incorporated into the Work meet the requirements of this Section, and shall also certify that materials and products incorporated into the Work are free of hazardous materials and substances.

**END OF SECTION**

## PART 1 - GENERAL

### 1.01 SUMMARY

- A. This Section includes requirements for the Contractor's insurance.

### 1.02 SUBMITTAL REQUIREMENTS

- A. Evidence of the required insurance within ten (10) days of the issued Notice of Award to the Contractor.
- B. Updated evidence of insurance as required until final completion.

### 1.03 COMMERCIAL GENERAL LIABILITY (CGL) INSURANCE

- A. The Contractor shall secure and maintain until Final Completion, at its sole cost and expense, the following insurance in carriers reasonably acceptable to the Port, licensed in the State of Washington, registered with the Washington State Insurance Commissioner, and possessing an A.M. Best rating of "A-, FSC six (6)" or better.
- B. The Port of Tacoma (Port) and the Northwest Seaport Alliance (NWSA) will be included as additional insureds for both ongoing and completed operations by endorsement to the policy using ISO Form CG 20 10 11 85 or forms CG 20 10 04 13 and CG 20 37 04 13 (or equivalent coverage endorsements). The inclusion of the Port and the NWSA as additional insureds shall not create premium liability for either the Port nor the NWSA.

Also, by endorsement to the policy, there shall be:

- 1. An express waiver of subrogation in favor of the Port;
  - 2. A cross liabilities clause; and
  - 3. An endorsement stating that the Contractor's policy is primary and not contributory with any insurance carried by the Port.
- C. If the Contractor, Supplier, or Subcontractors will perform any work requiring the use of a licensed professional, per RCW 18, the Contractor shall provide evidence to the Port of professional liability insurance in amounts not less than \$1,000,000.
  - D. This insurance shall cover all of the Contractor's operations, of whatever nature, connected in any way with the Contract, including any operations performed by the Contractor's Subcontractors of any tier. **It is the obligation of the Contractor to ensure that all Subcontractors (at whatever level) carry a similar program that provides the identified types of coverage, limits of liability, inclusion of the Port and the NWSA as additional insured(s), waiver of subrogation and cross liabilities clause.** The Port reserves the right to reject any insurance policy as to company, form, or substance. Contractor's failure to provide, or the Port's acceptance of, the Contractor's certificate of insurance does not waive the Contractor's obligation to comply with the insurance requirements of the Contract as specifically described below:
    - 1. Commercial General Liability Insurance on an Occurrence Form Basis including, but not limited to:
      - a. Bodily Injury Liability;
      - b. Property Damage Liability;
      - c. Contractual Liability;
      - d. Products - Completed Operations Liability;

e. Personal Injury Liability;

Alternatively, a Commercial General Liability (CGL) policy is acceptable if all of the above coverages are incorporated in the policy and there are no marine exclusions that will remove coverage for either vessels or work done by or above or around the water.

2. Comprehensive Automobile Liability including, but not limited to:
  - a. Bodily Injury Liability;
  - b. Property Damage Liability;
  - c. Personal Injury Liability;
  - d. Owned and Non-Owned Automobile Liability; and
  - e. Hired and Borrowed Automobile Liability.
3. Contractor's Pollution Liability (CPL) covering claims for bodily injury, property damage and cleanup costs, and environmental damages from pollution conditions arising from the performance of covered operations.
  - a. If the Work involves remediation or abatement of regulated waste to include, but not limited to asbestos containing materials, lead containing products, mercury, PCB, underground storage tanks, or other hazardous materials or substances, the CPL policy shall not exclude such coverage, or a specific policy covering such exposure shall be required from the Contractor and all Subcontractors performing such Work.
  - b. If the Work involves transporting regulated materials or substances or waste, a separate policy or endorsement to the CPL policy specifically providing coverage for liability and cleanup arising from an upset or collision during transportation of hazardous materials or substances shall be required from the Contractor and all Subcontractors performing such Work.
  - c. It is preferred that CPL insurance shall be on a true occurrence form without a sunset clause. However, if CPL insurance is provided on a Claims Made basis, the policy shall have a retroactive date prior to the start of this project, and this insurance shall be kept in force for at least three years after the final completion of this project. Alternatively, the contractor, at its option, may provide evidence of extended reporting period of not less than three (3) years in its place. The Contractor shall be responsible for providing the Port with certificates of insurance each year evidencing this coverage.
  - d. The Port and the NWSA shall be named as an additional insured(s) on the CPL policy.
4. Technology Professional Liability Errors and Omissions Insurance appropriate to the Consultant's profession and work hereunder, with limits not less than \$2,000,000 per occurrence. Coverage shall be sufficiently broad to respond to the duties and obligations as is undertaken by the Vendor in this agreement and shall include, but not be limited to, claims involving infringement of intellectual property, copyright, trademark, invasion of privacy violations, information theft, release of private information, extortion and network security. The policy shall provide coverage for breach response costs as well as regulatory fines and penalties as well as credit monitoring expenses with limits sufficient to respond to these obligations.

The policy shall include, or be endorsed to include, **property damage liability coverage** for damage to, alteration of, loss of, or destruction of electronic data and/or information "property" of the Agency in the care, custody, or control of the Vendor.

- E. Except where indicated above, the limits of all insurance required to be provided by the Contractor shall be not less than \$2,000,000 for each occurrence. If the coverage is aggregated, the coverage shall be no less than two times the per occurrence or per claim limit. However, coverage in the amounts of these minimum limits shall not be construed as to relieve the Contractor from liability in excess of such limits. Any additional insured endorsement shall NOT be limited to the amounts specified by this Contract, unless expressly waived in writing by the Port.
- F. Contractor shall certify that its operations are covered by the Washington State Worker's Compensation Fund. The Contractor shall provide its Account Number or, if self-insured, its Certificate of Qualification Number. The Contractor shall also provide evidence of Stop-Gap Employers' Liability Insurance.
- G. The Contractor shall furnish, within ten (10) days following issuance of the Notice of Award, a certificate of insurance satisfactory to the Port evidencing that insurance in the types and minimum amounts required by the Contract Documents has been secured. The Certificate of Insurance shall be signed by an authorized representative of the insurer together with a copy of the endorsement, which shows that the Port and the NWSA are named as additional insured(s).
- H. Contractor shall provide at least forty-five (45) days prior written notice to the Port of any termination or material change, or ten (10) day's-notice in the case of non-payment of premium(s).
- I. If the Contractor is required to make corrections to the Work after Final Completion, the Contractor shall obtain at its own expense, prior to the commencement of any corrective work, insurance coverage as required by the Contract Documents, which coverage shall be maintained until the corrections to the Work have been completed and accepted by the Port.

#### 1.04 BUILDER'S RISK INSURANCE

- A. Until Final Completion of the Work, the construction Work is at the risk of the Contractor and no partial payment shall constitute acceptance of the Work or relieve the Contractor of responsibility of completing the Work under the Contract.
- B. To the extent the Work provided under this Contract does not include the construction, rehabilitation or repair of any dam, road or bridge, and whenever the estimated cost of the Work is less than \$25,000,000, the Port and Contractor acknowledge that the Port will purchase, or has purchased, from a company or companies lawfully authorized and admitted to do business in Washington, property insurance written on a Builder's Risk "all-risk" (including Earthquake and Flood with applicable sub-limits) or equivalent policy form to cover the course of construction in the amount of the full insurable value thereof. This property insurance shall be maintained, unless otherwise provided in the Contract Documents or otherwise agreed in writing by all persons and entities who are beneficiaries of such insurance, until final payment has been made or until no person or entity other than the Port has an insurable interest in the property, whichever is later. Without further endorsement, the coverage afforded by this insurance includes the interests of the Port, the Contractor, and Subcontractors of any tier on the Project. Coverage for materials intended to be installed in the facility will be covered by the Builder's Risk policy. Losses up to the deductible amount, and payment of any deductible amount, shall be the responsibility of the Contractor. All tools and equipment not intended as part of the construction or installation (including but not limited to Contractor's equipment and tools) will NOT be covered by the policy.

To the extent the Work provided under this Contract involves any dam, roadway or bridge, the value of which exceeds \$250,000, or whenever the estimated cost of the Work is equal to or greater than \$25,000,000, Contractor will purchase from a company or companies lawfully

authorized and admitted to do business in Washington, property insurance written on a Builder's Risk "all-risk" (excluding Earthquake and Flood with applicable sub-limits) or equivalent policy form to cover the course of construction in the amount of the full insurable value thereof. This Builder's Risk insurance shall be maintained, unless otherwise provided in the Contract Documents or otherwise agreed in writing by all persons and entities who are beneficiaries of such insurance, until final payment has been made or until no person or entity other than the Port has an insurable interest in the property, whichever is later. Contractor shall provide evidence satisfactory to the Port confirming the coverage afforded by this insurance shall include the interests of the Port, the Contractor, and Subcontractors of any tier on the Project. Coverage for materials intended to be installed in the facility will be covered by the Builder's Risk policy purchased by the Contractor. Losses up to the deductible amount, and payment of any deductible amount, shall be the responsibility of the Contractor.

In all instances, the Contractor shall obtain property insurance for all Contractor-owned equipment and tools and, in the event of loss, payment of any deductible amount shall be the responsibility of the Contractor.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - PRODUCTS - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 PREVAILING AND OTHER REQUIRED WAGES**

- A. The Contractor shall pay (and shall ensure that all Subcontractors of any tier pay) all prevailing wages and other wages (such as Davis-Bacon Act wages) applicable to the Project.
- B. Pursuant to RCW 39.12, "Prevailing Wages on Public Works," no worker, laborer, or mechanic employed in the performance of any part of the Work shall be paid less than the "prevailing rate of wage" in effect as of the date that bids are due.

- 1. Based on the Bid Date, the applicable effective date for prevailing wages for this Project is March 3, 2021.

- C. The State of Washington prevailing wage rates applicable for this public works Project, which is located in Pierce County, may be found at the following website address of the Department of Labor and Industries:

<https://fortress.wa.gov/lni/wagelookup/prvWagelookup.aspx>

- D. The schedule of the prevailing wage rates is made a part of the Contract Documents by reference as though fully set forth herein, and a printed copy of the applicable prevailing wage rates are also available for viewing at the Port Administration Building, located at 1 Sitcum Plaza, Tacoma, WA 98421 (253-383-5841). Upon request to the Procurement Department at [procurement@portoftacoma.com](mailto:procurement@portoftacoma.com), the Port will email or mail a hard copy of the applicable Journey Level prevailing wages for this Project.

- E. Questions relating to prevailing wage data should be addressed to the Industrial Statistician.

Mailing Address: Washington State Department of Labor and Industries  
Prevailing Wage Office  
P.O. Box 44540  
Olympia, WA 98504

Telephone: (360) 902-5335

Facsimile: (360) 902-5300

- 1. If there is any discrepancy between the provided schedule of prevailing wage rates and the published rates applicable under WAC 296-127-011, the applicable published rates shall apply with no increase in the Contract Sum. It is the Contractor's responsibility to ensure that the correct prevailing wage rates are paid.

- F. Statement to Pay Prevailing Wages

- 1. Prior to any payment being made by the Port under this Contract, the Contractor, and each Subcontractor of any tier, shall file a Statement of Intent to Pay Prevailing Wages with the Department of Labor and Industries for approval.
  - 2. The statement shall include the hourly wage rate to be paid to each classification of workers entitled to prevailing wages, which shall not be less than the prevailing rate of wage, and the estimated number of workers in each classification employed on the Project by the Contractor or a Subcontractor of any tier, as well as the Contractor's contractor registration number and other information required by the Department of Labor and Industries.
  - 3. The statement, and any supplemental statements, shall be filed in accordance with the requirements of the Department of Labor and Industries. No progress payment shall be made until the Port receives such certified statement.

- G. The Contractor shall post, in a location readily visible to workers, at the Project site: (i) a copy of the Statement of Intent to Pay Prevailing Wages approved by the Industrial Statistician of the Department of Labor and Industries and (ii) the address and telephone number of the Industrial Statistician of the Department of Labor and Industries to whom a complaint or inquiry concerning prevailing wages may be directed.
- H. If a State of Washington prevailing wage rate conflicts with another applicable wage rate (such as Davis-Bacon Act wage rate) for the same labor classification, the higher of the two shall govern.
- I. Pursuant to RCW 39.12.060, if any dispute arises concerning the appropriate prevailing wage rate for work of a similar nature, and the dispute cannot be adjusted by the parties in interest, including labor and management representatives, the matter shall be referred for arbitration to the Director of the Department of Labor and Industries, and his or her decision shall be final and conclusive and binding on all parties involved in the dispute.
- J. Immediately following the end of all Work completed under this Contract, the Contractor and each Subcontractor of any tier, shall file an approved Affidavit of Wages Paid with the Department of Labor and Industries.
- K. The Contractor shall defend (at the Contractor's sole cost, with legal counsel approved by Port), indemnify, and hold the Port harmless from all liabilities, obligations, claims, demands, damages, disbursements, lawsuits, losses, fines, penalties, costs, and expenses, whether direct, indirect, including, but not limited to, attorneys' fees and consultants' fees and other costs and expenses, from any violation or alleged violation by the Contractor or any Subcontractor of any tier of RCW 39.12 ("Prevailing Wages on Public Works") or RCW Title 51 ("Industrial Insurance"), including, but not limited to, RCW 51.12.050.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 REQUIREMENTS APPLICABLE PORT-WIDE**

- A. The Contractor shall submit, prior to the start of Work, a list of emergency contact numbers for itself and its Subcontractors, Suppliers, and manufacturer representatives. Each person on the Project site shall have a valid identification card that is tamper proof with laminated photo identification, such as one (1) of the following:
  - 1. State-issued Driver's license (also required if driving a vehicle)
  - 2. Card issued by a governmental agency
  - 3. Passport
  - 4. Pacific Maritime Association card
  - 5. Labor organization identification card
- B. Identification cards shall be visible while on the Project site or easily displayed when requested.

### **1.02 TRANSPORTATION WORKER IDENTIFICATION CARD (TWIC) SUMMARY**

- A. TWIC is required for all personnel needing unescorted access to secure and restricted areas of Port facilities subject to 33 CFR 105, including truckers, surveyors, construction personnel, and delivery personnel. Secure areas are those areas with security measures for access control in accordance with a Coast Guard approved security plan. Restricted areas are those areas within a secure area that require increased limited access and a higher degree of security protection. New terminals under construction prior to terminal operations may not be designated secure areas. Construction on existing maritime transportation facilities and punchlist or other type of work requirements on facilities that have been certified under 33 CFR will require a TWIC.
- B. Contractors should allow for application and enrollment for the security threat assessment and issuance of TWIC when submitting a bid.

### **1.03 ESCORTING**

- A. To access restricted Port facilities, all un-credentialed individuals must be accompanied by a person who has been issued a TWIC and trained as an escort at that specific facility. Each restricted facility has their own guidelines for escorting. Having escort training at one facility does not qualify you to escort at other facilities. Prior to conducting escort services for non-TWIC personnel, the escorts are required to contact the Facility Security Officer at the gate for verification they are on the escort list and to document who is being escorted. For required documentation, upon completion of escorting, the escort is to inform the Security officer that the escort is complete. It is the Contractor's responsibility to schedule escort training with the Facility Security Officer.
- B. For more information, refer to the Port Security website at:  
<http://www.portoftacoma.com/shipping/security>
- C. For Project specific information, refer to Section 01 14 00 - Work Restrictions.

### **1.04 ELIGIBILITY FOR TWIC**

- A. Refer to the Transportation Worker Identification Credential website at: <https://www.tsa.gov/for-industry/twic> for information on eligibility and applying for TWIC.

### **1.05 TWIC USE AND DISPLAY**

- A. Each worker granted unescorted access to secure areas of a facility or vessel must present their cards to authorized personnel, who will compare the holder to his or her photo, inspect



security features on the TWIC, and evaluate the card for signs of tampering. The Coast Guard will verify TWIC's when conducting vessel and facility inspections and during spot checks using hand-held scanners, ensuring credentials are valid.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SCOPE**

- A. The accompanying Drawings and Specifications show and describe the location and type of Work to be performed under this project. Work is more specifically defined on the drawings listed in Section 00 01 15.
  - 1. The Work under this contract is to provide, furnish and install all labor, materials and equipment required to complete the work, installed, tested, and ready for use, and as described in these documents.
  - 2. The WUT Admin & Marine Building Roof Project consists of: The recovering of existing Hypalon membrane roofs with new polyvinyl chloride (PVC) membranes and installation of new bird deterrent systems.

### **1.02 LOCATION**

- A. The work is located at:
  - 1815 Port of Tacoma Road
  - Tacoma, WA 98421

## **PART 2 - PRODUCTS - NOT USED**

## **PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This Section specifies work sequence and constraints.
- B. The purpose of the milestones, sequence and limitations of construction are to ensure that the Contractor understands the requirements and limitations on its work by the specific characteristics of the Contract, schedules and conducts work in a manner consistent with achieving these purposes, and complies with the construction schedule, the specific sequence, constraints, milestones and limitations of work specified.
- C. Sequence of construction. Plan the sequence of construction to accommodate all the requirements of the specifications. The Contract Price shall include all specified requirements as described in this Section.
- D. The Facility will remain in operation during the entire construction period. The Contractor shall conduct their operations so as to prevent interference with the normal operations of the Tenant outside of any that have been negotiated and pre-approved by the Engineer.
- E. The Work under this Contract requires special attention to the scheduling and conduct of each task which has the potential to interrupt or hamper the Tenant's normal operations. Some tasks (such as work above open floor areas of the building) are required to be scheduled around busy Tenant activity periods. Identify on the construction schedule each task and work operation that may result in an impact to Tenant.

### **1.02 CONTRACTOR ACCESS AND USE OF PREMISES**

- A. Activity Regulations
  - 1. Ensure Contractor personnel deployed to the project become familiar with and follow all regulations or restrictions established by the Engineer.
- B. Occupied Building
  - 1. The Contractor will be working in existing buildings which are occupied during normal business hours (07:00 - 17:00). Extended business hours may apply on vessel days.
  - 2. Protect materials and equipment in areas adjoining the immediate work area.
- C. Working Facility
  - 1. The Facility will remain in operation for the duration of construction. The Contractor shall conduct all items of the Work in such a manner as to prevent interference with the normal operations of the Facility.
  - 2. Roof access shall be secured if possible when the Work area is not occupied.
  - 3. Work above open floor areas, such as roof hatches, is required to be scheduled with the Engineer. The building floor area below the Work shall be identified with free standing construction candles and construction tape as a notification to personnel on the floor.
  - 4. TWIC Escorting Requirements:
    - a. TWIC escort personnel are not permitted work assignments outside of observing non-TWIC workers.
    - b. TWIC escort personnel may observe a maximum of five non-TWIC workers.
- D. Work Site Regulations

1. Keep within the limits of work and assigned avenues of ingress and egress. Do not enter any areas outside the designated work location unless previously approved by the Engineer. The Contractor must comply with the following conditions:
  - a. Restore all common areas to a clean and useable condition that permits the resumption of Tenant operations after the Contractor ceases daily work.
  - b. Be responsible for control and security of Contractor-owned equipment and materials at the work site. Report to Port Security (phone (253) 383-9472) any missing/lost/stolen property.
  - c. Contractor staging areas shall be fenced and secured with a locking gate to restrict access when not in use.
  - d. Ensure all materials, tools and equipment will be removed from the site or secured within the designated laydown area at the end of each shift.

#### 1.03 CONSTRAINTS - GENERAL

- A. Work shall be coordinated with the Engineer or Engineers Representative.
- B. Terminal operations shall not be impacted by construction activities; terminal operated equipment and vehicles shall have right-of-way at all times.
- C. Refer to Section 01 55 00 Vehicular Access and Parking for construction workers.

#### **PART 2 - PRODUCTS**

#### **PART 3 - EXECUTION**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. Procedures for preparation and submittal of applications for progress payments.

### **1.02 PAYMENT PROCEDURES**

- A. Monthly pay estimates shall clearly identify the work performed for the given time period based on the approved Schedule of Values.
1. At the Pre-construction meeting, the Engineer and the Contractor shall agree upon a date each month when payment applications shall be submitted.
- B. For each pay estimate the Contractor shall submit the following:
1. Completed Contractor invoice and updated Schedule of Values tracking sheet as required by Division 01 or as established by the Engineer.
  2. Baseline Project Schedule and narrative updated as required by Section 01 32 16 of the Project Manual.
  3. Completed "Amounts Paid to Subcontracts and Suppliers" showing total contract amount, amount paid this estimate, total paid to date, and balance owing.
  4. Completed "Conditional Release and Waiver of Liens and Claims."
  5. An estimated cashflow statement projecting the Contractor's monthly billings on the project shall be submitted with each payment application.
- C. Prior to submitting a payment application, the Contractor and Engineer shall meet each month to review the work accomplished to determine the actual quantities including labor, materials and equipment charges to be billed.
1. Prior to the payment application meeting, the Contractor shall submit to the Engineer all measurement documentation as referenced in these contract documents; to include all measurement by weight, volume or field.
  2. For all change work being done on a force account basis, the Contractor shall submit prior to meeting with Engineer all Force Account back-up documentation as required to process the payment application where Force Account work is being billed. The Engineer and the Contractor shall review the documentation at the payment application meeting to verify quantities and review the work accomplished.
  3. The Contractor shall bring a copy of all documentation to the pay application meeting with the Engineer.
  4. The Contractor shall submit the updated baseline project schedule for review prior to submitting the payment application to ensure the payment processing is not held up due to necessary schedule revisions.
- D. Following the Engineers' review, the Contractor shall submit the agreed upon pay estimate electronically, with complete supporting documentation attached, using Adobe PDF file format to [cpinvoices@portoftacoma.com](mailto:cpinvoices@portoftacoma.com).

### **1.03 PAYMENT PRICING**

- A. Pricing for the various lump sum or unit prices in the Bid Form, as further specified herein, shall include all compensation to be received by the Contractor for furnishing all tools, equipment, supplies, and manufactured articles, and for all labor, operations, and incidentals appurtenant to the items of work being described, as necessary to complete the various items of the work in

accordance with the requirements of the Contract Documents.

- B. Pricing also includes all costs of compliance with the regulations of public agencies having jurisdiction, including safety and health requirements of the Occupational Safety and Health Administration of the U.S. Department of Labor (OSHA).
- C. No separate payment will be made for any item that is not specifically set forth in the Bid Form, and all costs therefore shall be included in the prices named in the Bid Form for the various appurtenant items of work.
- D. All other work not specifically mentioned in the measurement and payment sections identified below shall be considered incidental to the work performed and merged into the various unit and lump sum prices bid. Payment for work under one item will not be paid for under any other item.
- E. The Port of Tacoma reserves the right to make changes should unforeseen conditions necessitate such changes. Where work is on a unit price basis, the actual quantities occasioned by such changes shall govern the compensation.

#### 1.04 LUMP SUM MEASUREMENT

- A. Lump sum measurement will be for the entire item, unit of Work, structure, or combination thereof, as specified and as indicated in the Contractor's submitted bid.
  - 1. If the Contractor requests progress payments for lump sum items, such progress payments will be made in accordance with an approved Schedule of Values. The quantity for payment for completed work shall be an estimated percentage of the lump sum amount, agreed to between the Engineer and Contractor, payable in monthly progress payments in increments proportional to the work performed in amounts as agreed between the Engineer and the Contractor.

#### 1.05 MEASUREMENT OF QUANTITIES FOR UNIT PRICES

- A. Measurement Standards:
  - 1. All Work to be paid for at a contract price per unit measurement, as indicated in the Contractor's submitted bid, will be measured by the Engineer in accordance with United States Standard Measures.
- B. Measurement by Weight:
  - 1. Reinforcing steel, steel shapes, castings, miscellaneous metal, metal fabrications, and similar items to be paid for by weight shall be measured by scale or by handbook weights for the type and quantity of material actually furnished and incorporated into the Work.
  - 2. Unless shipped by rail, material to be measured and paid for by weight shall be weighed on sealed scales regularly inspected by the Washington State Department of Agriculture's Weights and Measures Section or its designated representative. Measurement shall be furnished by and at the expense of the Contractor. All weighing, measuring, and metering devices shall be suitable for the purpose intended and shall conform to the tolerances and specifications as outlined in Washington State Department of Transportation Standard Specifications, Division 1, General Requirements, Article 1-09.2, Weighing Equipment.
  - 3. Provide or utilize platform scales of sufficient size and capacity to permit the entire vehicle or combination of vehicles to rest on the scale platform while being weighed. Combination vehicles may be weighed as separate units provided they are disconnected while being weighed. Scales shall be inspected and certified as often as the Engineer may deem necessary to ascertain accuracy. Costs incurred as a result of regulating, adjusting, testing, inspecting, and certifying scales shall be borne by the Contractor.

4. A licensed weighmaster shall weigh all Contractor-furnished materials. The Engineer may be present to witness the weighing and to check and compile the daily record of such scale weights. However, in any case, the Engineer will require that the Contractor furnish weight slips and daily summary weigh sheets. In such cases, furnish a duplicate weight slip or a load slip for each vehicle weighed, and deliver the slip to the Engineer at the point of delivery of the material.
5. If the material is shipped by rail, the certified car weights will be accepted, provided only actual weight of material will be paid for and not minimum car weights used for assessing freight tariff. Car weights will not be acceptable for material to be passed through mixing plants. Material to be measured by weight shall be weighed separately for each bid item under which it is to be paid.
6. Trucks used to haul material being paid for by weight shall be weighed empty daily and at such additional times as the Engineer may require. Each truck shall bear a plainly legible identification mark. The Engineer may require the weight of the material be verified by weighing empty and loaded trucks on such other scales as the Engineer may designate.

C. Measurement by Volume:

1. Measurement by volume will be by the cubic dimension indicated in the Contractor's submitted bid. Method of volume measurement will be by the unit volume in place or removed as shown on the Contract Drawings or as specified.
2. When material is to be measured and paid for on a volume basis and it is impractical to determine the volume by the specified method of measurement, or when requested by the Contractor in writing and accepted by the Engineer in writing, the material may be weighed in accordance with the requirements specified for weight measurement. Such weights will be converted to volume measurement for payment purposes. Factors for conversion from weight measurement to volume measurement will be determined by the Resident Engineer and shall be agreed to by the Contractor before such method of measurement of pay quantities will be accepted.

D. Measurement by Area: Measurement by area will be by the square dimension shown on the Contract Drawings or as specified. Method of square measurement will be as specified.

E. Linear Measurement: Linear measurement will be by the linear dimension listed or indicated in the Contractor's submitted bid. Unless otherwise indicated, items, components, or Work to be measured on a linear basis will be measured at the centerline of the item in place.

F. Field Measurement for Payment:

1. The Contractor shall take all measurements by providing equipment, workers, and survey crews as required to measure quantities in accordance with the provisions for measurement specified herein. No allowance will be made for specified tolerances.
2. The Engineer will verify all quantities of Work performed by the Contractor on a unit-price basis, for progress payment purposes.

#### 1.06 REJECTED, EXCESS, OR WASTED MATERIALS

- A. Quantities of material wasted or disposed of in a manner not called for under the Contract; rejected loads of material, including material rejected after it has been placed by reasons of the failure of the Contractor to conform to the provisions of the Contract; material not unloaded from the transporting vehicle; material placed outside the lines indicated on the Contract Drawings or established by the Engineer; or material remaining on hand after completion of the Work, will not be paid for, and such quantities shall not be included in the final total quantities. No

additional compensation will be permitted for loading, hauling, and disposing of rejected material.

#### 1.07 MEASUREMENT AND PAYMENT

##### A. Item #1: Mobilization and Demobilization

1. Payment for MOBILIZATION AND DEMOBILIZATION shall be for preparatory work and operations performed by the Contractor including, but not limited to, those necessary for the movement of its personnel, equipment, supplies and incidentals to and from the project site; temporary facilities and controls; for the establishment and removal of its offices, buildings and other facilities necessary for work on the project; for other work and operations which it must perform or costs it must incur before beginning production work on the various items on the project site, and for removal of personnel, equipment, supplies, offices, building facilities, sheds, fencing, and other incidentals from the site.
2. Mobilization and Demobilization shall be paid at the lump sum price listed in the Contractor's submitted bid. Incremental payment shall be made for each location as follows:
  - a. 40% after completion of 5% of the total contract amount of other bid items have been earned.
  - b. 40% after completion of 20% of the total contract amount of other bid items have been earned.
  - c. 20% after completion of all work on the project has been completed, including cleanup and acceptance of the project by the Port.

##### B. Item #2: Project Administration

1. Item Description: The Work of this item includes all administrative costs associated with administering and supervising the project including, but not limited to supervision of personnel, coordination of all work activities, coordination of subcontractors and/or suppliers, preparation and transmittal of submittals, permit acquisitions, for premiums on bonds and insurance for the project, and project overhead.
2. Measurement: This item will be measured based on a percentage complete for the overall lump sum amount.
3. Payment: This item will be paid for at the Contract lump sum price as specified in the Contractor's submitted bid, in accordance with the approved Schedule of Values.

##### C. Item #3: Roofing Installation (Admin Building)

1. Item Description: The work of this item includes but is not limited to installation of new coverboard and PVC membrane over existing Hypalon membrane roof and flashings.
2. Measurement: This item will be measured based on a percentage complete for the overall lump sum amount.
3. Payment: This item will be paid for at the Contract lump sum price as specified in the Contractor's submitted bid, in accordance with the approved Schedule of Values.

##### D. Item #4: Roofing Installation (Marine Building).

1. Item Description: The work of this item includes but is not limited to installation of new coverboard and PVC membrane over existing Hypalon membrane roof and flashings.
2. Measurement: This item will be measured based on percentage complete for the overall lump sum amount.



3. Payment: This item will be paid for at the Contract lump sum price as specified in the Contractor's submitted bid, in accordance with the approved Schedule of Values.
- E. Item #5: Bird Deterrent System Installation (Admin Building)
1. Item Description: The work of this item includes but is not limited to, installation of a new bird deterrent wire system and wire arrays over large mechanical units per project documents.
  2. Measurement: This item will be measured based on percentage complete for the overall lump sum amount.
  3. Payment: This item will be paid for at the Contract lump sum price as specified in the Contractor's submitted bid, in accordance with the approved Schedule of Values.
- F. Item #6: Bird Deterrent System Installation (Marine Building)
1. Item Description: The work of this item includes but is not limited to, installation of a new bird deterrent wire system and wire arrays over large mechanical units per project documents.
  2. Measurement: This item will be measured based on percentage complete for the overall lump sum amount.
  3. Payment: This item will be paid for at the Contract lump sum price as specified in the Contractor's submitted bid, in accordance with the approved Schedule of Values.
- G. Item #7: Unforeseen Conditions Allowance
1. Item Description: This allowance will be for UNFORESEEN CONDITIONS ALLOWANCE for work unidentified at the time of bid and will be paid preferably as negotiated unit price(s) or lump sum(s). If unit prices or lump sums cannot be established, work will be paid on a time and materials basis per section 00 72 00 General Conditions Article 8.0. Work under this bid item shall be accomplished upon written direction from the Engineer as a Minor Change in Work.
  2. Measurement: This item will be measured based upon the method agreed upon for each Minor Change issued.
  3. Payment: This item will be paid for on a force account basis and at the price agreed upon for each change in Work issued by the Engineer in accordance with procedures noted in Section 01 26 00 - Change Management Procedures.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. Section includes administrative and procedural requirements for handling and processing Contract modifications.

### **1.02 SUBMITTALS**

- A. The Contractor shall submit for approval the following documentation to the Port for force account change orders:
  - 1. List of Labor Rates
    - a. For the Contractor and each subcontractor, a list of labor rates for each trade applicable to the scope of work to be performed. These submitted rates shall be broken down to include the base wage, fringes, FICA, SUTA, FUTA, industrial insurance, and medical aid premiums as stated in the General Conditions. The rates shall not contain any travel time, safety, loss efficiency factors, overhead, or profit. Rates shall be submitted for straight time, overtime, and double time in a form acceptable to the Engineer. Contractor shall provide proof of all labor rate costs as required by the Engineer, including the submission of a copy of the most current Workers Compensation Rate Notice from Labor & Industries and a copy of the Unemployment Insurance Tax Rate notice from the Employment Security Department.
      - 1) If labor rates change during the course of the project or additional labor rates become required to complete the work, the Contractor shall submit new rates for approval.
  - 2. List of Equipment.
    - a. Submit for the Contractor and each subcontractor, a list of equipment and rates applicable to the scope of work to be performed. The equipment rates shall conform to the rates shown on Equipment Watch. A separate page from equipment watch detailing the hourly rate shall be submitted as backup documentation for each piece of equipment.
      - 1) If the list of equipment and/or equipment rates changes during the course of the project or additional equipment becomes required to complete the work, the Contractor shall submit a new list and rates for approval.

### **1.03 METHOD TO CALCULATE ADJUSTMENTS TO CONTRACT PRICE**

- A. One of the following methods shall be used:
  - 1. Unit Price Method;
  - 2. Firm Fixed Price Method (Lump Sum); or,
  - 3. Time and Materials Method (Force Account).
- B. The Port preferred methods are firm fixed price or unit prices.

### **1.04 MINOR CHANGES IN THE WORK**

- A. Engineer will issue a written directive authorizing minor changes in the Work, not involving adjustment to the Contract Sum or the Contract Time.

## 1.05 PROPOSAL REQUESTS

- A. Port-Initiated Proposal Requests: The Engineer will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.
1. Work Change Proposal Requests issued by Engineer are not instructions either to stop work in progress or to execute the proposed change.
  2. Contractor shall submit a written proposal within the time specified in the General Conditions. The proposal shall represent the Contractor's offer to perform the requested work, and the pricing set forth within the proposal shall represent full, complete, and final compensation for the proposed change and any impacts to any other Contract Work, including any adjustments in the Contract Time.
    - a. Include a breakdown of the changed work in sufficient detail that permits the Engineer to substantiate the costs.
      - 1) Generally, the cost breakdown should be divided into the time and materials categories listed in the General Conditions under Article 8.02.B for either Lump Sum Proposals or Force Account Proposals.
      - 2) For Unit Price Proposals, include the quantity and description of all work involved in the unit pricing being proposed, along with a not to exceed total cost.
    - b. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
- B. Contractor-Initiated Proposals: If latent or differing site conditions require modifications to the Contract, the Contractor may initiate a claim by submitting a request for a change to the Engineer.
1. Notify the Engineer immediately upon finding differing conditions prior to disturbing the site.
  2. Provide follow-up written notification and differing site conditions proposal within the time frames set forth in the General Conditions.
  3. Provide the differing site condition change proposal in the same or similar manner as described above under 1.05.A.
  4. Comply with requirements in Section 00 26 00 Substitution Procedures if the proposed change requires substitution of one product or system for product or system specified.
  5. Proposal Request Form: Use form acceptable to Engineer.

## 1.06 PROCEEDING WITH CHANGED WORK

- A. The Engineer may issue a directive instructing the Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order per the General Conditions, Article 8.01.E.
1. The directive will contain a description of change in the Work and a not-to-exceed amount. It will designate the method to be followed to determine the change in the Contract Sum or the Contract Time.

## 1.07 CHANGE ORDER PROCEDURES

- A. Issuance of Change Order

1. On approval of the Contractor's proposal, and following successful negotiations, the Engineer will issue a Change Order for signature by the Contractor and execution by the Engineer.
  - a. The Contractor shall sign and return the Change Order to the Engineer within **four (4) days** following receipt of the Change Order from the Engineer. If the Contractor fails to return the signed Change Order within the allotted time, the Engineer may issue a Unilateral Change Directive.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This section includes specifications for preparation, format, and submittal of Schedule of Values.
- B. The Schedule of Values will establish unit prices for individual items of work.
- C. The Schedule of Values will be the basis for payment of contract work.

### **1.02 PREPARATION**

- A. To facilitate monthly pay requests, develop the Schedule of Values based on the Contractor's submitted Bid Items. The Schedule of Values shall be used to provide an allocation of the Work for measurement and payment to a level of detail to ensure accurate payment for the Work accomplished. The Schedule of Values is based on unit priced bid items and a breakdown of each lump-sum bid item. The total dollars for the Schedule of Values shall total the bid amount.
- B. Obtain the agreement of the Engineer on the Schedule of Values. No payment will be made prior to an agreed upon Schedule of Values.
- C. Include an updated version of the Schedule of Values as changes occur. Update the Schedule of Values to include:
  - 1. Dollars earned and percent complete for the current progress payment period,
  - 2. Dollars earned and percent complete to-date, excluding the current progress payment period,
  - 3. Total dollars earned and percent complete to-date,
  - 4. Total dollars remaining, and
  - 5. Changes resulting from Change Orders.
- D. The total value of the line items in the Schedule of Values plus any approved Change Orders shall be equal to the current approved contract price.
- E. The value of stored material shall be identified in the Schedule of Values with both a material-purchase activity and a separate corresponding installation activity in the Construction Schedule(s).
- F. Include as exhibits, drawings or sketches as necessary, to better define the limits of pay items that are in close proximity and that have no clear boundary in the Contract Drawings.

### **1.03 SUBMITTAL**

- A. Submit preliminary Schedule of Values within 10 days of the effective date of the Notice to Proceed.
- B. Submit corrected Schedule of Values within 10 days upon receipt of reviewed Schedule of Values.
- C. At the Engineer's request, submit documentation substantiating the cost allocations for line items within the Schedule of Values.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION**

**3.01 SCHEDULE OF VALUES**

- A. Submit the Schedule of Values in a form acceptable to the Engineer.
- B. Provide updated Schedule of Values as required by the Engineer and as indicated in the Contract Documents.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SCOPE**

- A. The purpose of this section is to provide the framework for communication between the Port and the Contractor by defining the types and timing of administrative tasks, including meetings and other items related to communications.

### **1.02 NOTICE TO PROCEED**

- A. Contract execution will be made per the requirements of the Contract Documents. Once the contract has been executed and all pre-work submittals have been received, the Engineer will issue a Notice to Proceed (NTP).
  - 1. In certain instances, the Engineer may issue to the Contractor a Limited NTP for specified elements of the work described in these Contract Documents.
- B. The Contractor shall submit all pre-work submittals within 10 days of contract execution.
  - 1. No contract time extension shall be granted for any delays in issuance of the NTP by the Engineer due to the Contractor's failure to provide acceptable submittals required by the Contract Documents.

### **1.03 COORDINATION**

- A. The Contractor shall coordinate all its activities through the Engineer.
- B. The Contractor shall coordinate construction operations as required to execute the Work efficiently, to obtain the best results where installation of one part of the Work depends on other portions.

### **1.04 PROJECT MEETINGS**

- A. Pre-Construction Meeting
  - 1. After execution of the contract, but prior to commencement of any work at the site, a mandatory one time meeting will be scheduled by the Engineer to discuss and develop a mutual understanding relative to the administration of the safety program, preparation of the Schedule of Values, change orders, RFI's, submittals, scheduling prosecution of the work. Major subcontractors who will engage in the work shall attend.
  - 2. Suggested Agenda: The agenda will include items of significance to the project.
  - 3. The Pre-Construction Meeting will be held at the Port of Tacoma Administration Building located at One Sitcum Plaza, if possible. However, based on assessment of current COVID-19 conditions, the Pre-Construction meeting may instead be completed via conference or web-based call.
- B. Weekly Progress Meetings – Progress meetings include the Contractor, Engineer, consultants and others affected by decisions made.
  - 1. The Engineer will arrange meetings, prepare standard agenda with copies for participants, preside at meetings, record minutes and distribute copies within ten working days to the Contractor, meeting participants, and others affected by decisions made.
    - a. The Engineer will approve submitted meeting minutes in writing within 10 working days.
  - 2. Attendance is required for the Contractor's job superintendent, major subcontractors and suppliers, Engineer, and representatives of the Port as appropriate to the agenda topics for each meeting.

3. Standard Agenda

- a. Review minutes of previous meeting
- b. Review of work progress
- c. Field observations, problems, and decisions
- d. Identification of problems that impede planned progress
- e. Maintenance of Progress Schedule (3 weeks ahead; 1 week back)
- f. Corrective measures to regain projected schedules
- g. Planned progress during succeeding work period
- h. Coordination of projected progress
- i. Maintenance of quality and work standards
- j. Effect of proposed changes on progress schedule and coordination
- k. Demonstration that the project record drawings are up-to-date
- l. Other business relating to the work

**PART 2 - PRODUCTS - NOT USED**

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**



## **PART 1 GENERAL**

### **1.01 SUMMARY**

- A. This section includes the requirements to provide a preliminary schedule and construction progress schedule, bar chart type.

### **1.02 SUBMITTALS**

- A. Within 10 days following execution of the contract, submit a baseline project schedule defining planned operations.
- B. If the baseline project schedule requires revision after review, submit revised baseline project schedule within 10 days.
- C. Within 20 days after review of baseline project schedule, submit draft of proposed complete baseline project schedule for review.
- D. Submit updated progress schedule monthly to the Engineer with each pay application as required in Section 01 20 00 Price and Payment Procedures.

### **1.03 QUALITY ASSURANCE**

- A. Scheduler: Contractor's personnel or Consultant specializing in Critical Path Method (CPM) scheduling with one year's minimum experience in scheduling construction work of a complexity comparable to this Project, and having use of computer facilities capable of delivering a detailed graphic printout within 48 hours of request.

### **1.04 SCHEDULE FORMAT**

- A. The baseline project schedule shall be produced using the CPM format.
- B. Listings: In chronological order according to the start date for each activity. Identify each activity with the applicable specification section number.
- C. Sheet Size: Multiples of 11 x 17 (280 x 432 mm).

## **PART 2 PRODUCTS - NOT USED**

## **PART 3 EXECUTION**

### **3.01 BASELINE SCHEDULE**

- A. Prepare baseline project schedule in the form of a horizontal bar chart.
- B. The baseline project schedule shall include all the activities listed in the Schedule of Values and be directly related to items listed in the Bid Form. The Contractor is encouraged to add sufficient activities to facilitate a clear understanding of the means and methods planned for the various work items.
- C. Show complete sequence of construction by activity, with dates for beginning and completion of each element of construction and critical path. At a minimum it shall include and show the following:
  - 1. A time scale showing the elementary work items needed to complete the work;
  - 2. Estimated time durations for each activity, defined as any single identifiable work step within the project;
  - 3. A graphical network diagram showing the logical sequence of activities, their precedence relationships, and estimated float or leeway available for each;

4. The different categories of work as distinguished by crew requirements, equipment requirements, and construction materials; and
  5. The different areas of responsibility, such as distinctly separate or subcontracted work, and identifiable subdivisions of work.
- D. It shall be maintained and updated as necessary to accurately reflect past progress and the most probable future progress.
- E. Activities shown shall include submittals, milestones, and sufficient task breakdown for major components of work.
- F. Identify work of separate stages and other logically grouped activities.
- G. Provide sub-schedules to define critical portions of the entire schedule.
- H. Provide separate schedule of submittal dates for shop drawings, product data, samples, owner-furnished products, products identified, and dates reviewed submittals will be required from the Engineer. Indicate decision dates for selection of finishes.

### 3.02 PROGRESS SCHEDULE

- A. From the regularly-maintained baseline project schedule, progress schedules showing a three-week look-ahead, one-week look-back, shall be submitted and distributed at the weekly progress meetings. The progress schedule shall represent a practical plan to complete the work shown within the contract work window presented. At a minimum, the presentation, typically a Gantt-style chart, shall convey the task durations, a logical work sequence, task interdependencies, and identify important or critical constraints.
- B. Submittal and distribution of progress schedules will be understood to be the Contractor's representation that the scheduled work meets the requirements of the contract documents and that the work will be executed in the manner and sequence presented, and over the durations indicated.
- C. The scheduling, coordination, and execution of construction in accordance with the contract documents are the responsibility of the Contractor. The Contractor shall involve, coordinate, and resolve scheduling with all subcontractors, material suppliers, or others affected in development of the progress schedules.
- D. The progress schedule shall be used for coordination purposes for inspection and testing purposes as well as validation of work progress against the baseline schedule.

### 3.03 UPDATING SCHEDULE

- A. Maintain schedules to record actual start and finish dates of completed activities.
- B. Indicate progress of each activity to date of revision, with projected completion date of each activity.
- C. Identify activities modified since previous submittal, major changes in Work, and other identifiable changes.
- D. Indicate changes required to maintain Date of Substantial Completion.
- E. Submit reports required to support recommended changes.
- F. Contractor shall submit an updated progress schedule with each pay application and include a written narrative describing the overall progress of the work. The narrative shall include the following key aspects:
1. Progress in the last period.

2. Critical Path progress and schedule concerns.
3. Changes to schedule logic or sequencing of the work.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This section includes the requirements to provide a submittal log and project submittals.

### **1.02 SUBMITTAL LOG**

- A. Contractor shall, within 14 days of contract execution prepare and submit for Engineer approval a detailed log of all the submittals required under this Contract, along with any other submittals identified by the Port or Contractor. The log shall include, but not be limited to, schedules, required construction Work plans, equipment and material cut sheets, shop drawings, project record documents, test results, survey records, record drawings, results of QC testing, and all other items for which a submittal is required. The submittal log shall be organized by CSI Specification Division, and Section number and include the following information:
1. Item Description
  2. Category
  3. Specification Section information of the applicable section
  4. After the submittal log is reviewed and approved by the Engineer, it shall become the basis for the submittal of all items by Contractor.

### **1.03 COMPLIANCE**

- A. Failure to comply with these requirements shall be deemed as the Contractor's agreement to furnish the exact materials specified or materials selected by the Engineer based on these specifications.

### **1.04 SHOP DRAWINGS AND MANUFACTURERS' LITERATURE**

- A. The Port will not accept shop drawings that prohibit the Port from making copies for its own use.
- B. Shop drawings shall be prepared accurately and to a scale sufficiently large to indicate all pertinent features of the products and the method of fabrication, connection, erection, or assembly with respect to the Work.
- C. All drawings submitted to the Engineer for approval shall be drawn to scale as ANSI D.
- D. Required electronic formats for these drawings are as follows:
1. AutoCad DWG
  2. PDF - Formatted to print to half-scale using 11x17 paper
- E. Catalog cuts or brochures shall show the type, size, ratings, style, color, manufacturer, and catalog number of each item and be complete enough to provide for positive and rapid identification in the field. General catalogs or partial lists will not be accepted. Manufacturers' original electronic files are required for submitting.

### **1.05 SUBMITTAL REVIEW**

- A. After review of each of Contractor's submittals, the submittal will be returned to Contractor with a form indicating one or more of the following:
1. No Exceptions Taken - Means, accepted subject to its compatibility with future submittals and additional partial submittals for portions of the work not covered in this submittal. But it does not constitute approval or deletion of specified or required items not shown in the partial submittal.

2. Make Corrections Noted - Same as Item 1, except that minor corrections as noted shall be made by Contractor.
  3. Reviewed - Submittal has been reviewed by the Port, does not constitute approval, and the Contractor is responsible for requirements in submittal.
  4. Review as Noted - Submittal has to be reviewed by the Port with comments as noted.
  5. Revise and Resubmit - Means, rejected because of major inconsistencies or errors. Resolve or correct before next submittal.
  6. Rejected - Means, submitted material does not conform to the Contract Documents in a major respect (e.g., wrong material, size, capacity, model, etc.).
- B. Submittals marked "No Exceptions Taken," "Make Corrections Noted," or "Reviewed as Noted" authorizes Contractor to proceed with construction covered by those data sheets or shop drawings with corrections, if any, incorporated.
- C. When submittals or prints of shop drawings have been marked "Revise and Resubmit" or "Rejected," Contractor shall make the necessary corrections and submit required copies. Every revision shall be shown by number, date, and subject in a revision block, and each revised shop drawing shall have its latest revision numbers and items clearly indicated by clouding around the revised areas on the shop drawing.
- D. Submittals authorized by the Engineer do not in any case supersede the Contract Documents. The approval by the Engineer shall not relieve the Contractor from responsibility to conform to the Drawings or Specifications, or correct details when in error, or ensure the proper fit of parts when installed. A favorable review by the Port of shop drawings, method of work, or information regarding material and equipment Contractor proposes to furnish shall not relieve Contractor of its responsibility for errors therein and shall not be regarded as assumption of risk or liability by the Port or its officers, employees, or representatives. Contractor shall have no claim under the Contract on account of failure or partial failure, or inefficiency or insufficiency of any plan or method of work, or material and equipment so accepted. Favorable review means that the Port has no objection to Contractor using, upon its own full responsibility, the plan or method of work proposed, or furnishing the material and equipment proposed.
- E. It is considered reasonable that the Contractor's submittals shall be complete and acceptable by at least the second submission of each submittal. The Port reserves the right to deduct monies from payments due Contractor to cover additional costs for review beyond the second submission.

## **PART 2 - PRODUCTS - NOT USED**

## **PART 3 - EXECUTION**

### **3.01 PREPARATION OF SUBMITTALS**

- A. The Contractor shall use the Port supplied transmittal form for all submittals and email submittals in a clear PDF document to the Engineer at Required Email to send submittals to if no PCM.
- B. A separate submittal shall be prepared for each product or procedure and shall be further identified by referencing the Specification Section and paragraph number and each submittal shall be numbered consecutively.
- C. Product submittals that cannot be accomplished electronically shall be submitted electronically without attachments, marked as being hand delivered, and accompanied by a printed version of a transmittal.

- D. Shop and detail drawings shall be submitted in related packages. All equipment or material details which are interdependent, or are related in any way, must be submitted indicating the complete installation. Submittals shall not be altered once marked "No Exceptions Taken" Revisions shall be clearly marked and dated. Major revisions must be submitted for approval.
- E. The Contractor shall thoroughly review all shop and detail drawings, prior to submittal, to assure coordination with other parts of the work.
- F. Components or materials which require shop drawings and which arrive at the job site prior to approval of shop drawings shall be considered as not being made for this project and shall be subject to rejection and removal from the premises.
- G. All submittal packages including, but not limited to, product data sheets, mix designs, shop drawings and other required information for submittal must be submitted, reviewed and approved before the relevant scheduled task may commence. It is the responsibility of the Contractor to provide the submittal information which may drive a task on the construction schedule to submit items well enough in advance as to provide adequate time for review and comment from the Engineer without adversely impacting the construction schedule.
- H. When completing the e-Builder® submittal form, a Date Due field is required to be completed. This field is intended to inform the Port of the urgency of the submittal. Failure of the Port to return the submittal by the date provided by the Contractor will not be considered grounds for a contract time extension.

### 3.02 PRE-WORK SUBMITTALS

- A. Prior to issuance of Notice to Proceed, the following submittals must be submitted and returned to the Contractor as No Exceptions Taken, Make Corrections Noted, Reviewed, or Reviewed as Noted.
  - 1. Baseline Project Schedule per Section 01 32 16 - Construction Progress Schedule
  - 2. List of Contractor and Subcontractor Personnel per Section 00 73 63 – Security Requirements including emergency contacts for each Company on-site
  - 3. Submittal Log per Section 01 33 00 - Submittal Procedures
  - 4. Health and Safety Plan (HASP) and Spill Prevention, Control, and Countermeasures (SPCC) Plan per Section 01 35 29 - Health Safety and Emergency Response
  - 5. List of equipment and written certification per Section 01 35 47 - Air and Noise Control

### 3.03 MAINTENANCE OF SUBMITTAL LOG

- A. Prepare and submit for Port review a detailed submittal log conforming to the requirements of paragraph 1.02 of this section. When approved by the Engineer, use the submittal log to track the transmittal of submittals to the Engineer, the receipt of submittal comments from the Engineer, and all subsequent action with respect to each submittal. Provide an updated copy of the submittal log to the Engineer during each weekly progress meeting, unless otherwise approved by the Engineer.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. The work includes the requirements for health and safety provisions necessary for all work at the site for this project. The work also includes compliance with all laws, regulations and ordinances with respect to safety, noise, dust, fire and police action, civil disobedience, security or traffic.
- B. The Contractor shall monitor site conditions for indications of identified and other potentially hazardous, dangerous, and/or regulated materials (suspicious material). Indicators of suspicious material include, but are not limited to, refuse, oily sheen or coloring on soil or water, or oily or chemical odors. If suspicious materials are encountered, the Contractor shall stop all work in that area and notify the Engineer immediately.

### **1.02 SUBMITTALS**

- A. Prior to Notice to Proceed, the Contractor shall provide a site specific Health and Safety Plan (HASP), which meets all the requirements of local, state and federal laws, rules and regulations. The HASP shall address all requirements for general health and safety and shall include, but not be limited to:
  - 1. Description of work to be performed and anticipated chemical and/or physical hazards associated with the work;
  - 2. Map of the site(s) illustrating the location of the anticipated hazards and areas of control for those hazards (including containments, exclusion/work zones, and contaminant reduction/decontamination zones);
  - 3. Hazardous material inventory and safety data sheets (SDSs) for all chemicals which will be brought on site;
  - 4. Signage appropriate to warn site personnel and visitors of anticipated site hazards;
  - 5. Engineering controls/equipment to be used to protect against anticipated hazards;
  - 6. Personal protective equipment and clothing including head, foot, skin, eye, and respiratory protection;
  - 7. Procedures which will be used for:
    - a. Lockout/Tagout,
    - b. Fall protection,
    - c. Suspicious materials and/or unidentified materials,
  - 8. Site housekeeping procedures and personal hygiene practices;
  - 9. Administrative controls;
  - 10. Emergency plan including locations of and route to nearest hospital;
  - 11. Recordkeeping including:
    - a. Documentation of appropriate employee training.
  - 12. Lighting and sanitation; and
  - 13. Signatory page for site personnel to acknowledge receipt, understanding, and agreement to comply with the HASP.

- B. Prior to the start of any Work, the Contractor shall provide a site specific Spill Prevention, Control and Countermeasures (SPCC) Plan, which meets all the requirements of local, state and federal laws, rules and regulations.
- C. Contractor may submit the HASP and SPCC Plan as one comprehensive document or may submit the plans as separate documents.
- D. The Contractor shall include in the HASP recent requirements associated with the State's COVID-19 Job Site Requirements as noted at in Appendix D or online at <https://www.governor.wa.gov/sites/default/files/Phase%201%20Construction%20COVID-19%20Safety%20Requirements%20%28final%29.pdf>.

### 1.03 POTENTIAL CHEMICAL HAZARDS

- A. Site Contaminants
  - 1. The Contractor must provide site workers with Hazard Communication standard information for potential site contaminants (in accordance with WAC 296-843). The Contractor shall ensure that all site workers are aware of and understand this information. Additional information shall also be provided by the Contractor, as necessary, to meet the Hazard Communication Standard and HASP requirements as noted in WAC 296-901-14010 and 296-843. Workers shall be instructed on basic methods or techniques to assist in detecting suspicious material.
- B. Chemical hazards may also result from Contractor operations resulting in inadvertent release of fuel, oil, or other chemicals in a manner that would expose workers.

### 1.04 POTENTIAL PHYSICAL AND OTHER HAZARDS

- A. The Work of the Contractor is described elsewhere in these specifications. Precautions to prevent all anticipated physical and other hazards, including heavy equipment, shall be addressed in the HASP.
- B. Specific aspects of construction resulting in physical hazards anticipated for this project include, but are not limited to the following:
  - 1. Major hazards associated with impacts from moving construction vehicles and trucks, noise, thermal stress, contact with unguarded machines, strains from heavy lifting, and reduced visibility and communications difficulties in work area; and
  - 2. Operation of equipment, including excavators, loaders, and related equipment, presenting hazards of entrapment, ensnarement, and being struck by moving parts.
- C. Other anticipated physical hazards:
  - 1. Heat stress, such as that potentially caused by impermeable clothing (may reduce the cooling ability of the body due to evaporation reduction);
  - 2. Cold stress, such as that potentially caused during times when temperatures are low, winds are high, especially when precipitation occurs during these conditions;
  - 3. Biological hazards, such as mold, insect stings, or bites; and
  - 4. Trips and falls.

## PART 2 - PRODUCTS

### 2.01 SAFETY SIGNAGE

- A. The Contractor shall provide signage at strategic locations within the project site to alert jobsite workers and visitors of the work, associated hazards, and required precautions.



## 2.02 PRODUCTS SPECIFIED FOR HEALTH AND SAFETY

- A. Provide the equipment and supplies necessary to support the work as described in the site-specific HASP. Equipment and supplies may include, but are not limited to:
1. All chemicals to be used on site;
  2. A hazardous materials inventory and SDSs for the chemicals brought on site;
  3. Fencing and barriers;
  4. Warning signs and labels;
  5. Fire extinguishers;
  6. Equipment to support lockout/tagout procedures;
  7. Scaffolding and fall protection equipment;
  8. Personal protective equipment (hard hats, foot gear, skin, eye, and respiratory protection);
  9. Demolition equipment and supplies;
  10. First aid equipment;
  11. Spill response and spill prevention equipment; and
  12. Field documentation logs/supplies.

## **PART 3 - EXECUTION**

### 3.01 WORK AREA PREPARATION

- A. Contractor shall comply with health and safety rules, regulations, ordinances promulgated by the local, state, and federal government, the various construction permits, and other sections of the Contract Documents. Such compliance shall include, but not be specifically limited to: any and all protective devices, equipment and clothing; guards; restraints; locks; latches; switches; and other safety provisions that may be required or necessitated by state and federal safety regulations. The Contractor shall determine the specific requirements for safety provisions and shall have inspections and reports by the appropriate safety authorities to be conducted to ensure compliance with the intent of the regulations.
- B. Contractor shall inform employees, subcontractors and their employees of the potential danger in working with any potentially regulated materials and equipment at the project site.
- C. Contractor shall perform whatever work is necessary for safety and be solely and completely responsible for conditions of the job site, including safety of all persons (including employees of the Engineer, Engineer's Representative, and Contractor) and property during the Contract period. This requirement applies continuously and is not limited to normal working hours.
- D. The Engineer's review of the Contractor's performance does not include an opinion regarding the adequacy of, or approval of, the Contractor's safety supervisor, the site-specific HASP, safety program or safety measures taken in, on, or near the job site.
- E. Accidents causing death, injury, or damage must be reported immediately to the Engineer and the Port Security Department in person or by telephone or messenger. In addition, promptly report in writing to the Engineer all accidents whatsoever arising out of, or in connection with, the performance of the work whether on, or adjacent to, the site, giving full details and statements of witnesses.

- F. If a claim is made by anyone against the Contractor or any subcontractor on account of any accident, the Contractor shall promptly report the facts in writing within 24 hours after occurrence, to the Engineer, giving full details of the claim.

### 3.02 SITE SAFETY AND HEALTH OFFICER

- A. Contractor shall provide a person designated as the Site Safety and Health Officer, who is thoroughly trained in rescue procedures, has a minimum current 40-hour HAZWOPER certification (minimum), and trained to use all necessary safety equipment, air monitoring equipment, and gas detectors. The person must be available and/or present at all times while work is being performed, and conduct testing, as necessary.
- B. The Site Safety and Health Officer shall be empowered with the delegated authority to order any person or worker on the project site to follow the safety rules. Failure to observe these rules is sufficient cause for removal of the person or worker(s) from this project.
- C. The Site Safety and Health Officer is responsible for determining the extent to which any safety equipment must be utilized, depending on conditions encountered at the site.

### 3.03 SPILL PREVENTION AND CONTROL

- A. The Contractor shall be responsible for prevention, containment and cleanup of spilling petroleum and other chemicals/hazardous materials used in the Contractor's operations. All such prevention, containment and cleanup costs shall be borne by the Contractor.
- B. The Contractor is advised that discharge of oil, fuel, other petroleum, or any chemicals/hazardous materials from equipment or facilities into state waters or onto adjacent land is not permitted under state water quality regulations.
- C. In the event of a discharge of oil, fuel or chemicals/hazardous materials into waters, or onto land with a potential for entry into waters, containment and cleanup efforts shall begin immediately and be completed as soon as possible, taking precedence over normal work. Cleanup shall include proper disposal of all spilled material and used cleanup materials.
- D. The Contractor shall, at a minimum, take the following measures regarding spill prevention, containment and cleanup:
  - 1. Fuel hoses, lubrication equipment, hydraulically operated equipment, oil drums and other equipment and facilities shall be inspected regularly for drips, leaks or signs of damage, and shall be maintained and stored properly to prevent spills. Proper security shall be maintained to discourage vandalism.
  - 2. All land-based chemical, oil and products' storage tanks shall be diked, contained and/or located so as to prevent spills from escaping into the water. Dikes and containment area surfaces shall be lined with impervious material to prevent chemicals or oil from seeping through the ground and dikes.
  - 3. All visible floating sheen shall be immediately contained with booms, dikes or other appropriate means and removed from the water prior to discharge into state waters. All visible spills on land shall be immediately contained using dikes, straw bales or other appropriate means and removed using sand, sawdust or other absorbent material, which shall be properly disposed of by the Contractor. Waste materials shall be temporarily stored in drums or other leak-proof containers after cleanup and during transport to disposal. Waste materials shall be disposed offsite in accordance with applicable local, state and federal regulations.
  - 4. In the event of any oil or product discharges into public waters, or onto land with a potential for entry into public waters, the Contractor shall immediately notify the Port Security at their

listed 24-hour response number:

a. Port Security: 253-383-9472

E. The Contractor shall maintain the following materials (as a minimum) at each of the project sites:

1. Oil-absorbent booms: 100 feet;
2. Oil-absorbent pads or bulk material, adequate for coverage of 200 square feet of surface area;
3. Oil dry-all, gloves, and plastic bags.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This Section discloses procedures to follow if unknown regulated materials are encountered.

### **1.02 NOTIFICATION AND SUSPENSION**

- A. In the event the Contractor detects the presence of potentially regulated materials not previously identified in this specification, the Contractor shall stop work and immediately notify the Port. Following such notification by the Contractor, the Port shall in turn notify the various governmental and regulatory agencies concerned with the presence of regulated materials, if warranted. Depending upon the type of materials identified, the Port may suspend work in the vicinity of the discovery under the provisions of General Conditions.
1. Following completion of any further testing necessary to determine the nature of the materials involved, the Port will determine how the material shall be managed. Although the actual procedures used in resuming the work shall depend upon the nature and extent of the regulated material, the following alternate methods of operation are foreseen as possible:
    - a. Contractor to resume work as before the suspension.
    - b. Contractor to move its operations to another portion of the work until measures to eliminate any hazardous conditions can be developed and approved by the appropriate regulatory agencies.
    - c. The Port to direct the Contractor to dispose or treat the material in an approved manner.
    - d. The Port to terminate or modify the Contract accordingly, for unforeseen conditions.

## **PART 2 - PRODUCTS - NOT USED**

## **PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. The Work includes the requirements to provide air and noise control measures until Final Completion of the Work.

### **1.02 SUBMITTALS**

- A. Prior to Notice to Proceed, the Contractor shall submit a list of equipment to be used on the project and written certification that all equipment on the list and any additional equipment, including Contractor's, subcontractors or supplier's equipment, shall meet the requirements of 3.01 below.

## **PART 2 - PRODUCTS - NOT USED**

## **PART 3 – EXECUTION**

### **3.01 AIR POLLUTION CONTROL**

- A. The Contractor shall meet or exceed EPA Tier 2 off-road diesel engine emission standards for off-road equipment  $\geq 25$ hp and meet or exceed EPA 1994 on-road diesel engine emission standards for on-road equipment except as follows:
  - 1. Equipment being used in an emergency or public safety capacity
- B. The Contractor shall not discharge smoke, dust, and other hazardous materials into the atmosphere that violate local, state or federal regulations.
- C. No vehicles can idle for more than 5 consecutive minutes, except as follows:
  - 1. Idling is required to bring or maintain the equipment to operating temperature;
  - 2. Engine idling is necessary to accomplish work for which the equipment was designed (i.e. operating a crane); or
  - 3. Idling vehicles being used in an emergency or public safety capacity.
- D. The Contractor shall minimize nuisance dust by cleaning, sweeping, vacuum sweeping, sprinkling with water, or other means. Equipment for this operation shall be on the job site or available at all times.

### **3.02 NOISE CONTROL**

- A. The Contractor shall comply with all local controls and noise level rules, regulations and ordinances which apply to work performed pursuant to the Contract.
- B. All internal combustion engines used on the job shall be equipped with a muffler of a type recommended by the manufacturer.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 PERMITS, CODES, AND REGULATIONS**

- A. The following permits/approvals have been applied for (or are on file) and incorporated into the Contract:
  - 1. State Environmental Policy Act (SEPA) Exemption, Appendix B
  - 2. Shoreline Substantial Development Permit Exemption, Appendix C
- B. Contractor shall obtain over-the-counter (OTC) permit, as required by the City of Tacoma to support this roof recover project, and conform with all related requirements.
- C. Conform with the requirements of listed permits and additional or other applicable permits, codes, and regulations as may govern the Work.
- D. Obtain and pay fees for licenses, permits, inspections, and approvals required by laws ordinances, and rules of appropriate governing or approving agencies necessary for proper completion of Work (other than those listed under item 1.01.A above and Special Inspections called for by the International Building Code).
- E. Conform with current applicable codes, regulations and standards, which is the minimum standard of quality for material and workmanship. Provide labor, materials, and equipment necessary for compliance with code requirements or interpretations, although not specifically detailed in Drawings or specifications. Be familiar with applicable codes and standards prior to bidding.
- F. Process through Engineer, request to extend, modify, revise, or renew any of the permits (listed in 1.01.A above). Furnish requests in writing and include a narrative description and adequate Drawings to clearly describe and depict proposed action. Do not contact regulatory agency with requests for permit extensions, modifications, revisions, or renewals without the prior written consent of the Engineer.

### **1.02 VARIATIONS WITH CODES, REGULATIONS AND STANDARDS**

- A. Nothing in the Drawings and specifications permits Work not conforming to codes, permits, or regulations. Promptly submit written notice to the Engineer of observed variations or discrepancies between the Contract Documents and governing codes and regulations.
- B. Appropriate modifications to the Contract Documents will be made by Change Order to incorporate changes to Work resulting from code and/or regulatory requirements. Contractor assumes responsibility for Work contrary to such requirements if Work proceeds without notice.
- C. Contractor is not relieved from complying with requirements of Contract Documents which may exceed, but not conflict with requirements of governing codes.

### **1.03 COORDINATION WITH REGULATORY AGENCIES**

- A. Coordinate Work with appropriate governing or regulating authorities and agencies.
- B. Provide advance notification to proper officials of Project schedule and schedule revisions throughout Project duration, in order to allow proper scheduling of inspection visits at proper stages of Work completion.
- C. Regulation coordination is in addition to inspections conducted by Engineer. Notify Engineer at least 48 hours in advance of scheduled inspections involving outside regulating officials, to allow Engineer to be present for inspections.

**PART 2 - PRODUCTS - NOT USED**

**PART 3 – EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 QUALITY CONTROL FOR COMPLIANCE:**

- A. The Contractor shall perform such detailed examination, inspection, quality control and assurance of the Work as to ensure that the Work is progressing and is being completed in strict accordance with the Contract Documents. The Contractor shall plan and lay out all Work in advance of operations so as to coordinate all Work without delay or revision. The Contractor shall be responsible for inspection of portions of the Work already performed to determine that such portions are in proper condition to receive subsequent Work. Under no conditions shall a portion of Work proceed prior to preparatory work having been satisfactorily completed. The Contractor shall ensure that the responsible Subcontractor has carefully examined all preparatory work and has notified the Contractor (who shall promptly notify the Port in writing) of any defects or imperfections in preparatory work that will, in any way, affect completion of the Work.

### **1.02 QUALITY ASSURANCE - CONTROL OF INSTALLATION**

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce Work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Engineer before proceeding.
- D. Comply with specified standards as minimum quality for the Work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Perform Work by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop Drawings or as instructed by the manufacturer.
- G. Secure Products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, or disfigurement.

### **1.03 TOLERANCES**

- A. Monitor fabrication and installation tolerance control of Products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Engineer before proceeding.
- C. Adjust Products to appropriate dimensions; position before securing Products in place.

### **1.04 TESTING SERVICES**

- A. Tests, inspections and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules and regulations or lawful orders of public authorities.
  - 1. Neither observations by an inspector retained by the Port, the presence or absence of such inspector at the site, nor inspections, tests, or approvals by others, shall relieve the Contractor from any requirement of the Contract Documents, nor is any such inspector authorized to change any term or condition of the Contract Documents.



- B. Necessary materials testing shall be performed by an independent testing laboratory during the execution of the Work and paid for by the Port of Tacoma, unless otherwise specified. Access to the area necessary to perform the testing and/or to secure the material for testing, shall be provided by the Contractor.
- C. Testing does not relieve Contractor from performing work to contract requirements.
- D. Re-testing required because of non-conformance to specified requirements will be charged to the Contractor by deducting testing charges from the Contract Sum via Change Order.
- E. Material testing for initial material approval will be performed by an independent, certified laboratory and paid for by the Contractor. These tests must be dated within six (6) months of the submittal date.
- F. Subsequent sampling and testing, required as the work progresses to ensure continual control of materials and compliance with all requirements of the Contract documents, shall be the responsibility of the Port, except as required by other sections of these Specifications.

#### 1.05 MANUFACTURER'S FIELD SERVICES

- A. When specified in individual specification sections, require material or Product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, start-up equipment, test, and adjust and balance equipment as applicable, and to initiate instructions when necessary.
- B. Submit qualifications of observer to Engineer 30 days in advance of required observations. Observer subject to approval of Engineer.
- C. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.

#### **PART 2 - PRODUCTS - NOT USED**

#### **PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This section includes requirements relating to the following:
  - 1. Temporary utilities,
  - 2. Temporary sanitary facilities,
  - 3. Temporary Controls: Barriers, enclosures, and fencing.

### **1.02 TEMPORARY UTILITIES**

- A. Provide and pay for all electrical power, lighting, water, heating and cooling, and ventilation required for construction purposes. Contractor is responsible for getting required permits and meters from the City of Tacoma.
- B. Existing facilities may not be used.
- C. New permanent facilities may not be used.
- D. Use trigger-operated nozzles for water hoses, to avoid waste of water.

### **1.03 TEMPORARY SANITARY FACILITIES**

- A. Provide and maintain required facilities and enclosures. Provide at time of project mobilization.
- B. Maintain daily in clean and sanitary condition.
- C. At end of construction, return facilities to same or better condition as originally found.

### **1.04 BARRIERS**

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for Port's use of site, and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.

### **1.05 FENCING**

- A. Construction: Refer to plans.
- B. Provide 6 ft. (1.8 m) high fence as shown in plans; equip with vehicular gates with locks.

### **1.06 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS**

- A. Remove temporary utilities, equipment, facilities, materials, prior to final inspection.
- B. Clean and repair damage caused by installation or use of temporary work.
- C. Restore existing facilities used during construction to original condition.
- D. Restore new permanent facilities used during construction to specified condition.

## **PART 2 - PRODUCTS - NOT USED**

## **PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This section includes requirements relating to the following:
  - 1. Access roads
  - 2. Parking
  - 3. Construction parking controls
  - 4. Haul routes
  - 5. Maintenance
  - 6. Removal, repair
  - 7. Mud from site vehicles

## **PART 2 - PRODUCTS**

### **2.01 SIGNS, SIGNALS, AND DEVICES**

- A. Post Mounted and Wall Mounted Traffic Control and Informational Signs, as specified.
- B. Traffic Cones and Drums, Flares and Lights: As approved by local jurisdictions.
- C. Flag Person Equipment: As required by local jurisdictions.

## **PART 3 - EXECUTION**

### **3.01 PREPARATION**

- A. Clear areas, provide surface and storm drainage of road, parking, area premises, and adjacent areas.

### **3.02 ACCESS TO SITE**

- A. Contractor shall conduct all business through the gate assigned by the Engineer.
  - 1. The Contractor may be required to relocate entry and related work areas as required by WUT Operations.
- B. Provide unimpeded access for emergency vehicles. Maintain 20 foot (6 m) width driveways with turning space between and around combustible materials.
- C. Provide and maintain access to fire hydrants free of obstructions.

### **3.03 PARKING**

- A. All Contractor's employee cars and work vehicles will be parked on-site as designated by the Engineer.

### **3.04 CONSTRUCTION PARKING CONTROL**

- A. Control vehicular parking to prevent interference with public traffic and parking, access by emergency vehicles, and WUT operations.
- B. Contractor vehicles may be parked in designated spaces at both the Admin & Marine Buildings, however, extreme congestion frequently occurs near the Marine Building on vessel days. WUT vehicles will be given priority for parking at the Marine Building and Contractor shall be prepared to shuttle workers from the Admin Building, when necessary.
- C. Prevent parking on or adjacent to access roads or in non-designated areas.

### 3.05 HAUL ROUTES

- A. Confine construction traffic to designated haul routes.
- B. Provide traffic control at critical areas of haul routes to regulate traffic, to minimize interference with public traffic.

### 3.06 MAINTENANCE

- A. Maintain traffic and parking areas in a sound condition free of excavated material, construction equipment, Products, mud, snow, and ice.
- B. Maintain existing paved areas used for construction. Promptly repair breaks, potholes, low areas, standing water, and other deficiencies, to maintain paving and drainage in original, or specified, condition.

### 3.07 REMOVAL, REPAIR

- A. Repair existing facilities damaged by use, to original condition.
- B. Repair damage caused by installation.

### 3.08 PUBLIC STREET AND ONSITE ROADWAY CLEANING

- A. The Contractor shall be responsible for preventing dirt and dust escaping from trucks and other vehicles operating on or departing the project site by sweeping, covering dusty loads, washing truck tires, and all other reasonable methods.

**END OF SECTION**

## **PART 1 – GENERAL**

### **1.01 SUMMARY**

- A. The Work shall consist of planning, installing, inspecting, maintaining and removing Temporary Erosion and Sediment Control (TESC) Best Management Practices (BMPs) to prevent pollution of air and water; and to control, respond to, and dispose of eroded sediment and turbid water during the term of the Contract.

### **1.02 SUBMITTALS**

- A. Prior to the start of any construction activities, a Construction Stormwater Pollution Prevention Plan (SWPPP), as required by the MS4.
  - 1. The Port has prepared a project SWPPP template that complies with the MS4 requirements. This template is included in Appendix A.
  - 2. Contractor shall comply with a Contractor provided project SWPPP.
  - 3. Contractor shall be responsible for updating the project SWPPP during construction to reflect the required changes to BMPs and personnel, as needed, to comply with the MS4 at no additional cost to the Port.
- B. Safety Data Sheet (SDS) for any dust palliative product.
- C. A copy of all Contractor site inspection logs at a time interval (e.g., weekly, monthly) specified by the Engineer.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This section includes the requirements to provide product data under the applicable specification section.

### **1.02 SUBMITTALS**

- A. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- B. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- C. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
  - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

## **PART 2 - PRODUCTS**

### **2.01 NEW PRODUCTS**

- A. Provide new products unless specifically required or permitted by the Contract Documents.

### **2.02 PRODUCT OPTIONS**

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

## **PART 3 - EXECUTION**

### **3.01 TRANSPORTATION AND HANDLING**

- A. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- B. Transport and handle products in accordance with manufacturer's instructions.
- C. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- D. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- E. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage.
- F. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

### 3.02 STORAGE AND PROTECTION

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weather tight, climate controlled, enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- G. Prevent contact with material that may cause corrosion, discoloration, or staining.
- H. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- I. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This section includes requirements relating to the following:
  - 1. Examination, preparation, and general installation procedures
  - 2. Cutting and patching

### **1.02 SUBMITTALS**

- A. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
  - 1. Structural integrity of any element of Project;
  - 2. Integrity of weather exposed or moisture resistant element;
  - 3. Efficiency, maintenance, or safety of any operational element;
  - 4. Visual qualities of sight exposed elements; and
  - 5. Work of the Port or separate Contractor.
- B. Project As-Built Documents: Accurately record actual locations of capped and active utilities.

## **PART 2 - PRODUCTS**

### **2.01 PATCHING MATERIALS**

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.

## **PART 3 - EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

### **3.02 PREPARATION**

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.



- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

### 3.03 GENERAL INSTALLATION REQUIREMENTS

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

### 3.04 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. Perform whatever cutting and patching is necessary to:
  - 1. Complete the work;
  - 2. Fit products together to integrate with other work;
  - 3. Provide openings for penetration of mechanical, electrical, and other services;
  - 4. Match work that has been cut to adjacent work;
  - 5. Repair areas adjacent to cuts to required condition;
  - 6. Repair new work damaged by subsequent work;
  - 7. Remove samples of installed work for testing when requested; and
  - 8. Remove and replace defective and non-conforming work.
- C. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- D. Employ original installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- E. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- F. Restore work with new products in accordance with requirements of Contract Documents.
- G. Patching:
  - 1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
  - 2. Match color, texture, and appearance.
  - 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

### 3.05 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- E. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- F. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- G. Remove protective coverings when no longer needed; reuse or recycle plastic coverings if possible.

### 3.06 ADJUSTING

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. This section includes information for progress and final cleaning and restoration of damaged work prior to final inspection.

## **PART 2 - PRODUCTS**

### **2.01 MATERIALS**

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

## **PART 3 - EXECUTION**

### **3.01 PROGRESS CLEAN-UP**

- A. The Contractor shall clean the project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.
  - 1. Comply with all requirements for removal of combustible waste materials and debris.
  - 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
  - 3. Containerize unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
    - a. Use containers intended for holding waste materials for the type of material to be stored.
  - 4. Coordinate progress cleaning for joint use areas where Contractor and other contractors are working concurrently.
- B. Site: Maintain Project site free from waste materials and debris.
- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the work.
  - 1. Remove liquid spills promptly.
  - 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
- G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways.
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from

damage or deterioration until Substantial Completion.

- I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- J. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

### 3.02 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
  - 1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:
    - a. Clean Project site, yard, and grounds in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
    - b. Sweep paved areas broom clean. Remove spills, stains, and other foreign deposits.
    - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
    - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
    - e. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances.
    - f. Remove debris and surface dust from limited access spaces, including roofs, attics, and similar spaces.
    - g. Sweep concrete floors broom clean in unoccupied spaces.
    - h. Remove labels that are not permanent.
    - i. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency.
    - j. Leave Project clean and ready for occupancy.

### 3.03 REPAIR OF WORK

- A. Complete repair and restoration operations before requesting inspection for determination of Substantial Completion.
- B. Repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surface, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.
  - 1. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that already show evidence of repair or restoration.

- a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.
2. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
  - 1. Substantial Completion procedures
  - 2. Final completion procedures
  - 3. Warranties
  - 4. As-Built Drawings

### **1.02 ACTION SUBMITTALS**

- A. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.

### **1.03 PROJECT SUBMITTALS**

- A. Submittal of Project Warranties
- B. Record Drawings
  - 1. Miscellaneous Record Submittals: See other Specification Sections for miscellaneous recordkeeping requirements and submittals in connection with various construction activities.
- C. Schedule of Maintenance Material Items: For maintenance material submittal items specified in other Sections.

### **1.04 SUBSTANTIAL COMPLETION PROCEDURES**

- A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected.
- B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request:
  - 1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction permitting Port unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
  - 2. Submit closeout submittals specified in individual Sections, including specific warranties, operation and maintenance manuals, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
  - 3. Submit maintenance material submittals specified in individual Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by the Contract Document or Engineer. Label with manufacturer's name and model number where applicable.
- C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request:
  - 1. Instruct Port's personnel in adjustment and maintenance of products and systems
  - 2. Terminate and remove temporary facilities from Project site

3. Complete final cleaning requirements

- D. Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to the date the work will be completed and ready for final inspection and tests. On receipt of request, Engineer will either proceed with inspection or notify Contractor of unfulfilled requirements. Engineer will prepare the Notice of Substantial Completion after inspection or will notify Contractor of items, either on the Contractor's list or additional items identified by the Engineer, that must be completed or corrected before notice will be issued.
1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
  2. Results of completed inspection will form the basis of requirements for final completion.

1.05 PUNCH LIST (LIST OF INCOMPLETE ITEMS)

- A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of Construction.
1. Organize list of spaces in sequential order.
  2. Organize items applying to each space by major elements.

1.06 FINAL COMPLETION PROCEDURES

- A. Submittals Prior to Final Completion: Before requesting final inspection for determining final completion, complete and submit the following:
1. Submittal of all remaining items, including as-built documents, final completion construction photographic documentation, damage or settlement surveys, and similar final record information and all other submittals defined in the Contract Documents.
  2. List of Incomplete Items: Submit copy of Engineer's Substantial Completion inspection list of items to be completed or corrected (Punch List). Copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
- B. Inspection: Submit a written request for final inspection to determine acceptance a minimum of 7 days prior to date the work will be complete and ready for final inspection and tests. On receipt of request, the Engineer will either proceed with inspection or notify contractor of unfulfilled requirements.
1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

- C. Execution of all Change Orders.

1.07 FINAL ACCEPTANCE PROCEDURES

- A. Submittals Prior to Final Acceptance:
1. Receipt and approval of application for final payment; due within seven (7) days of receipt of Final Completion by the Engineer;
  2. Contractor's signed waiver and release of claims on the Engineer provided form;
  3. Contractor's submittal of list of all suppliers and subcontractors and the total amounts paid to each on the Engineer provided form; and
  4. Contractor's submittal of a list of all subcontractors and suppliers requiring Affidavits of Wages paid on the Contract and certify that each of companies will submit an approved

Affidavit of Wages paid to the Port within 30 days.

- B. The Engineer will issue the Final Acceptance Memo upon receipt of the required submittals.

## **PART 2 - PRODUCTS**

### **2.01 CONTRACTOR'S WARRANTY**

- A. The Contractor warrants the labor, materials and equipment delivered under the contract to be free from defects in design, material, or workmanship, and against damage caused prior to final inspection. Unless otherwise specified, this warranty extends for a period of one (1) year from the date of Substantial Completion.
1. Time of Submittal: Submit written warranties on request of Engineer for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated, or when delay in submittal of warranties might limit the Port's rights under warranty.
  2. Submit Warranties to the Engineer as a submittal, as described in 01 33 00 – Submittal Procedures.
  3. Provide additional copies of each warranty in Operation and Maintenance Manuals as described in 01 78 23 – Operation and Maintenance Manuals.

### **2.02 AS-BUILT DRAWINGS**

- A. Project As-Built Drawings: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised drawings as modifications are issued.
- B. Project As-Built Drawings shall be compiled by the Contractor and submitted to the Engineer for translation to the Record Drawings on a monthly basis.
1. The Project As-Built Drawings will be submitted on paper full-sized (ANSI D) copy.
  2. Drawings shall be kept current and shall be done at the time the material and equipment is installed. Annotations to the record documents shall be made with an erasable colored pencil conforming to the following color code:
    - a. Additions – Red
    - b. Deletions – Green
    - c. Comments – Blue
    - d. Dimensions – Graphite
  3. Project As-Built Drawings must be complete and accepted by the Engineer before Final Completion is issued.
  4. As-Built Drawings shall be in accordance with horizontal and vertical control as shown on the drawings.

## **PART 3 – EXECUTION**

### **3.01 MAINTENANCE OF AS-BUILT DRAWINGS**

- A. The Contractor shall maintain at the Project site, in good order for ready reference by the Engineer, one complete copy of the Contract Documents, including Addenda, Change Orders, other documents issued by the Port, a current Progress Schedule, and approved Submittals. The Contractor shall also generate and keep on site all documents and reports required by applicable permits.



- B. The Contractor's As-Built Drawings shall be updated to record all changes made during construction. The location of all existing or new underground piping, valves and utilities, and obstructions located during the Work shall be appropriately marked until the Contractor incorporates the actual field dimensions and coordinates into the as-built drawings. The as-built drawings shall be updated at least weekly and before elements of the Work are covered or hidden from view. After the completion of the Work, the as-built drawings shall be provided to the Port.

**END OF SECTION**

## **PART 1 – GENERAL**

### **1.01 SUMMARY**

- A. Operation and Maintenance Manual Submittal

### **1.02 SUBMITTALS**

- A. Operation and Maintenance Data:
  - 1. Submit 1 copy of completed documents 5 days prior to final inspection. This copy will be reviewed and returned after final inspection, with Engineer comments. Revise content of all document sets as required prior to final submission.
  - 2. Submit 2 sets of revised final documents in final form by Final Completion.

## **PART 2 - PRODUCTS**

### **2.01 OPERATION AND MAINTENANCE MANUALS**

- A. For small equipment and products (such as furnishings or equipment not requiring routine maintenance), the following information (minimum of 2 printed copies, plus one electronic copy on CD) shall be furnished for all items on the Project requiring operational and/or maintenance procedures and for any additional items indicated by the Engineer. Printed information shall be organized by the Contractor into appropriately sized 3-ring binders (no larger than 3"). The binders shall be sized for material approximately 8-1/2 by 11 inches, and the material in the binders shall not protrude beyond the covers. The binder(s) shall be divided with coversheets for each major item of equipment. The cover sheets shall be typewritten to indicate the name, type of equipment, and location(s) within the Project where installed. A neatly typewritten index shall be provided. Electronic information shall be in PDF format (additional formats where specified) and shall be organized with folders and appropriate file names so as to make the information easily accessible:
  - 1. Product Summary:
    - a. Provide the following information (as applicable, indicate 'N/A' where an item does not apply) in Excel spreadsheet format:
      - 1) Asset Number (to be provided by the Engineer at a later date)
      - 2) Description
      - 3) Plan Sheet Number
      - 4) Parcel Number
      - 5) Vendor
      - 6) Manufacturer
      - 7) Warranty – Start Date; Finish Date
      - 8) Purchase Price
  - 2. Maintenance Procedures: These instructions consist of the equipment manufacturer's recommended steps and schedules for maintaining the product.
  - 3. Specific Information: Where items of information not included in the above list are required, they will be provided as described in the specifications for the equipment.
  - 4. Complete identification, including model and serial numbers.

5. Submittal information, as specified in Section 01 33 00 Submittal Procedures.
6. Warranty Information: This information consists of the name, address, and telephone number of the manufacturer's representative to be contacted for warranty, parts, or service information.
7. All operation and maintenance information shall be comprehensive and detailed and shall contain information adequately covering all normal operation and maintenance procedures.
8. All information shall be specific for the items of equipment installed on the project. Material not directly applicable shall be removed, omitted, or clearly marked as inapplicable.
9. If manufacturer's standard brochures and manuals are used to describe operating and maintenance procedures, such brochures and manuals shall be modified to reflect only the model or series of equipment used on this project.
10. Extraneous material shall be crossed out neatly or otherwise annotated or eliminated. It shall be the responsibility of the Contractor to ensure that all operation and maintenance materials are obtained. Material submitted must meet the approval of the Engineer prior to project final acceptance.

**PART 3 - EXECUTION - NOT USED**

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 SUMMARY**

- A. Section Includes:
  - 1. Existing roof membrane preparation
  - 2. PVC Roof Membrane Assembly
    - a. Single-Ply PVC Roofing
    - b. Cover board
  - 3. Roof system documentation plaque
- B. Related Sections:
  - 1. 07 62 00 - Sheet Metal Flashing and Trim
- C. The Drawings, the provisions of the Agreement, the General Conditions, and Division 1 specification sections apply to all work of this Section.
- D. Substitutions: Substitute products will be considered only under the terms and conditions of Division 1 Requirements, and products meeting the requirements of this Section
- E. Roof Recover Description:
  - 1. Roof Assembly: Top-down summary:
    - a. Fully adhered PVC membrane roofing with membrane base flashings and penetration flashings
    - b. 1/4-inch cover board adhered in low-rise foam adhesive.
    - c. Existing fully adhered Hypalon roof
    - d. Existing coverboard
    - e. Existing insulation
    - f. Existing metal deck

### **1.02 QUALITY ASSURANCE:**

- A. Manufacturer Qualifications: Provide primary products, produced by a single manufacturer, which has produced that type product successfully for not less than five (5) years. Provide secondary products only as recommended by manufacturer of primary products for use with roofing system specified.
- B. Membrane Certification: submit letter from manufacturer (or outlined in manufacturer's certification data sheet) attesting to the following membrane system requirements outline in Section 2
  - 1. Minimum membrane thickness: 60 mils
  - 2. Minimum wear layer of 30 mils
  - 3. Membrane with above characteristics has been manufactured for at least five (5) years
- C. Manufacturer Field Quality Control: A technical representative of the materials manufacturer shall be available for consultation at site with a maximum of 24-hour notice.

- D. Manufacturer's representative shall make regular site inspections, no less than one per week. Representative shall provide a copy of a written summary report of the visit to the Engineer no more than 2 days after.
- E. Installer Qualifications: A single Installer ("Roofer") shall perform the work of this section; and shall be a firm with not less than ten (10) years of successful experience in installation of roofing systems similar to those required for this project and who is trained and authorized by the manufacturer of primary roofing materials for no less than ten (10) years.
- F. Installer shall provide all personnel trained in the application of the materials and systems and shall maintain supervision as specified elsewhere. Provide written certification from manufacturer of roofing system certifying that Installer is approved by manufacturer for installation of specified roofing system prior to bid.
- G. Manufacturer's Inspection: Upon completion of the installation, and the delivery to the membrane manufacturer's representative by the Contractor of a certification that all work has been done in strict accordance with the contract specifications and membrane manufacturer requirements, an inspection shall be made by a representative of the manufacturer to ascertain that the roofing system has been installed according to applicable manufacturer's specifications and details.
- H. Testing: The Owner reserves the right to perform any testing as may be required to determine compliance with these Contract Documents. Costs for such testing will be the Owner's responsibility unless testing indicates non-compliance. Costs for such testing indicating non-complying work shall be corrected and testing will be repeated until the work complies with the Contract Documents.
- I. UL Listing: Provide roofing system and component materials which have been tested for application and slopes indicated and are listed by Underwriters Laboratories, Inc. (UL) for class A external fire exposure over noncombustible decks.
- J. Provide roof-covering materials bearing Classification Marking (UL) on bundle, package or container indicating that materials have been produced under UL's Classification and Follow-up Service.

### 1.03 SUBMITTALS

- A. Make submittals in accordance with Section 01 33 00.
- B. Product Literature: Submit product literature for the following:
  - 1. Roofing materials.
  - 2. Insulation boards.
  - 3. Cover boards
  - 4. Adhesives.
  - 5. Attachment requirements to meet wind uplift identifying fastener rates to meet uplift requirements
  - 6. Submit drawing showing each layer of the roof assembly, method of attachment, including rates of fasteners or adhesive beads to meet wind uplift requirements.
- C. Insulation and Roof Board Approval: Manufacturer's written approval for rigid polyisocyanurate insulation and roof board.
- D. Samples: Three 3 x 6 inch samples of the insulation and each sheet component of the roofing and flashing membranes.

- E. Warranty: Copy of membrane manufacturer's proposed warranty.
- F. Evidence of UL and ICBO approvals.
- G. Shop Drawings: Submit shop drawings to describe all proposed details which deviate from what is shown on Contract Drawings, fully noted and drawn to scale with references to a roof plan.
- H. Roof Board and Insulation Layout: Submit roof plan indicating proposed insulation, crickets, roof board layout and sump taper system to meet FM requirements and manufacturer approval and sump taper system. Include submittals for fastening pattern for roof board meeting FM requirements.
- I. Roof Plaque layout
- J. Quality Assurance Submittals:
  - 1. Certifications: Letter from roofing manufacturer stating that proposed applicator of roofing system is approved to install roofs meeting the requirements of a 20-year unlimited penal sum warranty. Submit whether the warranty is required or not.
  - 2. Immediately after completion of the roofing system installation, submit report from the roofing system manufacturer, including inspection notes, stating the following:
    - a. Roofing system was installed in accordance with the manufacturer's recommendations to meet the warranty requirements specified.

#### 1.04 QUALITY ASSURANCE

- 1. Inspection: Roofing installation may be inspected. Give 72 hours' notice to the Engineer, prior to the start of each work phase.
- B. Qualifications of Installers:
  - 1. Approved by the membrane roofing manufacturer to install roofing systems meeting the requirements of a 20-year unlimited warranty.
  - 2. Minimum of 5 years' experience; use only competent and skilled roofers familiar with the products and the manufacturer's current recommended methods of installation.
- C. Pre-Installation Meeting:
  - 1. Prior to starting the work of this Section administer a pre-roofing meeting.
  - 2. Require in attendance the following parties:
    - a. Owner.
    - b. Architect.
    - c. Owner's roofing consultant.
    - d. Roofing installer.
    - e. Sheet metal and canopy cladding installers.
    - f. Mechanical installer.
    - g. Roofing manufacturer's representative.
  - 3. Agenda: Review all procedures, details, and sequence of construction. Discuss and determine responsibility for protection of the work during and after construction, and subsequent maintenance of the roofing system.

- D. Phased Application: Except as otherwise approved, phased application of the roofing system will not be permitted. If emergency dry-in becomes necessary, utilize necessary means/methods to prevent water entry into the building. Upon resumption of work all substrates shall be dry prior to new roof installation.
- E. Provide roofing membrane materials from a single manufacturer. Use only roofing accessories and insulation that are approved by the roofing membrane manufacturer, and are warrantable by the manufacturer as part of the entire roofing system.

#### 1.05 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to job site in sealed, undamaged, original containers imprinted with manufacturer's name, product name, and pertinent identifying numbers.
- B. Handle all materials to prevent damage. Place all materials on pallets and fully protected from moisture with clean canvas tarpaulins.
- C. Membrane rolls shall be stored lying down on pallets, and fully protected from moisture with clean canvas tarpaulins.
- D. Bonding adhesive shall be stored at temperatures above 40 degrees F.
- E. All flammable materials shall be stored in a cool dry area away from sparks and open flames. Follow precautions outlined on container or supplied by material manufacturer/supplier.
- F. Any materials that are determined by the Engineer and/or manufacturer to be damaged are to be removed from the job site and replaced at no cost to the Owner.

#### 1.06 JOB CONDITIONS

- A. Roofing Loading Limitations: Okay for contractor to load roofing materials from and stage roofing activities from the roof.
- B. Contractor shall verify that all roof drain lines are unblocked, and free running, before starting work. Report any such blockages to the Engineer in writing.
- C. Only as much of the new roofing as can be made watertight each day, including flashing work, shall be installed.
- D. All roofing, insulation, flashings and metal work removed for construction shall be taken off the site to a legal dumping area for disposal daily.
- E. Weather Condition Limitations: Roofing materials shall not be applied when water in any form, i.e., rain, dew, ice, frost, snow, etc., is present on the deck. All surfaces to receive new membrane or flashing shall be thoroughly dry. Should excessive surface moisture occur, the Contractor shall provide the necessary equipment to dry the surface prior to application.
- F. Prior to and during all applications, all dirt, debris, and dust shall be removed from surfaces either by vacuuming, sweeping, blowing with compressed air and/or similar methods.
- G. Do not install the PVC membrane in direct contact with any product containing asphalt, coal-tar pitch, creosote or penta-based materials. Consult manufacturer's representative for special installation requirements.
- H. Do not allow waste products containing petroleum, grease, acid, solvents, vegetable or mineral oil, animal oil, animal fat, etc. or direct steam venting to come into direct contact with roofing membrane.
- I. The contractor shall follow all safety regulations as recommended by OSHA.
- J. All local building codes and requirements must be followed where applicable.

K. Solvent welding of detail seams is not allowed.

#### 1.07 PROTECTIONS

- A. Provide tarps or plastic sheeting, as required, to adequately protect opened roofs and flashings and to prevent entrance of moisture or rain water into the existing structure until new materials have been applied and roof is in a water tight condition.
  - 1. All glass-faced insulation board (including HD board) shall have the factory wrap removed to allow the boards to breathe, and breathable tarps installed to provide weather protection.
- B. Do not open up any more roof surface at one time than can be adequately covered and protected in the event of sudden unexpected rainfall.
- C. Have necessary waterproof canvas or plastic sheeting handy in case of emergency. Contractor will be held liable for any damage to building interior due to his negligence.
- D. All new and temporary construction, including equipment and accessories, shall be secured against wind blow-off or damage.
- E. The Contractor shall provide all necessary protection and barriers to segregate the work area and to prevent damage to adjacent areas.
- F. Temporary cut-offs shall be installed at the end of each day's work, and shall be removed before proceeding with the next day's work. Waterstops shall be compatible with all materials, shall provide a 100% watertight seal, shall be as recommended by the roofing membrane manufacturer, and shall not emit dangerous or incompatible fumes.
- G. The contractor is warned that certain PVC membranes are incompatible with asphalt and oil-based materials and cements. Creosote and penta-based materials are also incompatible. Such materials shall not come into contact with PVC membranes at any time. If such contact occurs, the material shall be cut out and discarded. The contractor should consult membrane manufacturer with respect to material compatibility, precautions, and recommendations.
  - 1. Contractor to install insulation and cover board in such a way to prevent seepage of asphalt to areas where contact with new membrane could occur. Existing asphalt surfaces must be removed completely or separated per manufacture's recommendations.
- H. Precaution should be taken when using membrane adhesives at or near rooftop vent or air intakes. Potentially hazardous fumes could enter the building. Coordinate vents and air intakes to be closed or shut off during roofing and flashing operations in the area of such penetrations.

#### 1.08 WARRANTIES

- A. Submit in accordance with Division 1 requirements.
- B. Installer's Guarantee: The Contractor shall furnish from the roofing installer, a 2-year unlimited guarantee against defects in workmanship and materials.
- C. Manufacturer's Warranty: The PVC roofing materials manufacturer shall provide a written twenty (20) year warranty signed by a corporate officer for an unlimited penal sum guarantee covering both materials and installation of the materials and systems. The warranty shall include the entire membrane assembly and shall include replacement of insulation due to membrane system failure. The warranty shall be written to allow for minor roofing repairs by the Owner. All roofing work under this contract to be in accordance with the following warranty standards:



1. Meeting minimum warranty provisions using the warranty language provided at the end of this section as a template
  - a. Warranty structured such that Owner is not a signature party to the Warrantee
2. Non-pro-rated, no dollar limit
3. Duration: 20-years

## **PART 2 - PRODUCTS**

### **2.01 MATERIALS, GENERAL**

- A. Approved Manufacturers: Sika Sarnafil, Carlisle, Soprema
- B. General: Ensure that all products used on this project are 100% asbestos free. Provide certification to this effect if requested by the Engineer.
- C. Insurance and Code Requirements: Provide materials complying with governing regulations, and which can be installed to comply with the following:
  1. Underwriter's Laboratories and/or ICBO approved for a Class "B" rating when installed on combustible decks. Provide documentation meets SEI/ASCE 7 for wind uplift of membrane attachment.
- D. Warranty Requirements: Roof membrane manufacturer must approve the use of all accessory materials that affect the manufacturer's warranty and include them in their warranty.

### **2.02 PVC MATERIALS**

- A. Description, 60-mil, minimum thickness, single-ply PVC, white
  1. ASTM D 4434-95 standard for polyvinyl chloride sheet roofing. Classification: Type II
    - a. Sarnafil: G-410, fully-adhered
    - b. Soprema Sentinel P150, fully-adhered
    - c. Carlisle: Sure-Flex, fully-adhered
  2. Scrim:
    - a. Type: fiberglass
    - b. Stitching: 9" x 9" x 1000 Diniers
  3. Membrane requirements
    - a. Overall membrane thickness: minimum 60 mils
    - b. Wear layer minimum thickness: 30 mils

### **2.03 INSULATION**

- A. Install new insulation at areas where existing insulation is wet/or damaged.
  1. Verify insulation required by membrane manufacturer for system warranty applications.
  2. Approved manufacturers:
    - a. Carlisle: "SecurShield Polyiso
    - b. Soprema: Sopra-Iso Insulation
    - c. Hunter, Tapered H-Shield CG

- d. Note equal products must have non-organic facers.
- B. Flat Stock Roof Insulation: Rigid closed cell polyisocyanurate foam insulation with fiberglass facers, 48" x 96", or approved equal. Minimum edge thickness shall be one-quarter inch (1/4"). Maximum thickness of any single layer shall be 2.5". ASTM C 1289, Type II, Class 2, Grade 2, (20 psi).
  - 1. Verify insulation required by membrane manufacturer for system warranty applications.
  - 2. Approved manufacturers:
    - a. Carlisle: "SecurShield Polyiso
    - b. Soprema: "Sopra-Iso Insulation"
    - c. Sika Sarnafil: "Sarnatherm ISO"

#### 2.04 COVER BOARD

- A. Glass-mat, pre-primed water-resistant gypsum board
  - 1. Board Size: 48" x 96", or approved equal
  - 2. Thickness: 1/4 inch
  - 3. Manufacturers:
    - a. Georgia Pacific, Dens Deck Prime
    - b. USG Secure-Rock (pre-primed for fully adhered membrane application)
    - c. or approve equal

#### 2.05 MISCELLANEOUS PRODUCTS

- A. General: Provide installation accessories as required for complete roofing system and as recommended by membrane manufacturer
- B. Membrane Adhesive: water-based adhesive as recommended by manufacturer for particular substrate and project condition, formulated to withstand minimum 60 psf uplift force and as approved by membrane manufacturer.
  - 1. Screws and plates for insulation (where described in roof assemblies): Factory-coated steel fasteners and 3" diameter metal or plastic plates complying with corrosion-resistance provisions in FM Global 4470, designed for fastening substrate board, insulation, to the roof deck.
  - 2. Ensure fasteners do not penetrate the roof deck as the underneath side of the roof deck is an exposed surface.
- C. Coverboard Fasteners: Coated galvanized steel; with factory-applied corrosion-resistant coating, with three-inch metal disks. Size and type required for substrate type and thickness and for deck type. Provide fasteners which meet requirements for pullout resistance.
- D. Coated metal flashings: Galvanized steel, minimum 25 gage, coated with PVC for direct heat welding with membrane.
  - 1. Sarnaclad: PVC-coated, heat-weldable sheet metal capable of being formed into a variety of shapes and profiles.
  - 2. Soprema, Carlisle equivalent to Sarnaclad PVC-coated metal

- E. Walkways: Preformed walkway boards: As manufactured or recommended by membrane manufacturer. Size: 36 inches wide X 30 inches long; minimum 1/8 inch thick.
- F. Walkway board adhesive: As recommended by membrane manufacturer.
- G. Preformed Pipe Boot Flashings: Molded from same material as flexible flashings. Provide stainless steel band clamp for top edge.
- H. Asphalt Resistant Membrane Flashing: Utilize asphalt resistant membrane where in contact with any existing asphalt residue, if necessary for manufacturer chosen.
- I. Provide 1/4" x 1" aluminum termination bar to secure top edge of membrane at wall surfaces.
- J. Conduit Blocking: pressure treated 4 x 4 blocking. Provide separate protection under each block to protect roof membrane.

## 2.06 ROOF PLAQUE

- A. Furnish and install "Roof Installation Information Plaque"
  - 1. Plaque: photo-engraved, aluminum card (for exterior display) at location to be determined by the Engineer.
    - a. Size: 5.5" x 8.5" x 3/16".
- B. Engraved Information:
  - 1. Name of Building
  - 2. Date of Substantial Completion
  - 3. Date of Install Warranty Expiration
  - 4. Date of Roof Manufacturer Warranty Expiration
  - 5. Roof Manufacturer and warranty reference number

## PART 3 - EXECUTION

### 3.01 EXAMINATION

- A. Carefully inspect substrate and adjacent construction and verify that conditions are suitable for installation of the work as indicated and specified.
  - 1. Verify that all surfaces to be covered by roofing are properly pitched to drain, and suitable for installation of roofing system.
  - 2. Examine surfaces for low areas that will not drain properly, foreign material, ice, wet insulation, unevenness, or any other defect which would prevent the proper execution and quality application of the Roofing System as specified.
  - 3. Verify that installation of wood blocking and grounds, vents, drains, curbs, and other projections has been completed.
  - 4. Verify that roof penetrations are tubular.
- B. Discrepancies: In the event of discrepancy, notify the Engineer, and do not proceed with installation until discrepancies have been corrected.
- C. Commencement of roofing installation constitutes Contractor acceptance of substrate condition as satisfactory.
- D. Removal and Preparation of Existing Roof System(s):

1. Remove existing built-up roof membrane, flashings and other materials noted in the drawings and legally dispose off-site.
2. Remove only enough roofing to accommodate the day's work and ensure the exposed area can be made 100% watertight at the end of the day or first sign of inclement weather.
3. Ensure that all drains are clear and clamping rings tightened at the end of each work day.

### 3.02 INSULATION AND COVERBOARD INSTALLATION

#### A. General Installation Requirements:

1. Install coverboard and substrate coverboard in accordance with approved shop drawings and insulation and adhesive manufacturer's printed instructions.
2. Securely butt edges without deformation. Miter board edges at ridges and elsewhere to prevent open joints.
3. Protect insulation from weather exposure at all times until roofing is installed.
4. Stagger joints between layers
5. Mechanically fasten substrate coverboard (HD board) to substrate with mechanical fasteners and 3 inch metal disks.
6. Fully-adhere coverboard with manufacturer's recommended adhesive

### 3.03 ROOF MEMBRANE INSTALLATION

- A. Install membrane materials in accordance with Manufacturer's current published application instructions and these contract documents. Application of roofing membrane shall immediately follow application of insulation assembly as a continuous process with no phased application.
- B. Loosely lay sheet membrane over roof insulation and allow the membrane to relax thirty (30) minutes minimum before bonding or splicing. Apply adjoining sheets by lapping the edges and splicing.
- C. Accurately align roofing membrane and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.
- D. Bonding Adhesive: Apply bonding adhesive to substrate and underside of roofing membrane at rate required by manufacturer and allow to partially dry before installing roofing membrane. Do not apply bonding adhesive to splice area of roofing membrane.
- E. Mechanically fasten roofing membrane securely at terminations, penetrations, and perimeter of roofing.
- F. Apply roofing membrane with side laps shingled with slope of roof deck where possible.
- G. Seams: Clean seam areas, overlap roofing membrane, and weld side and end laps of roofing membrane and sheet flashings according to manufacturer's written instructions to ensure a watertight seam installation. Weld seams as follows:
  1. Weld Method: Hot air.
    - a. All side and end lap joints shall be hot air welded. Lap areas shall be a minimum of 3" wide when machine welding and 4" wide when hand welding.
  2. Test lap edges with probe to verify seam weld continuity. Apply lap sealant to seal cut edges of sheet membrane if required by manufacturer.
  3. Verify field strength of seams a minimum of twice daily and repair seam sample areas.

4. Repair tears, voids, and lapped seams in roofing that does not meet requirements.
- H. Spread sealant bed over deck drain flange at deck drains and securely seal roofing membrane in place with clamping ring.
- I. Membrane securement: Provide securement at all locations where membrane ends or goes through angle change except for round pipe penetrations less than 18" in diameter and square penetrations less than 4" square. Utilize batten strips at all horizontal terminations of field plies.
- J. Flash all penetrations passing through the sheet membrane. Flashing shall be installed per manufacturer's approved details at roof intersections, parapets, and around penetrations. Use longest pieces practicable

#### 3.04 MEMBRANE FLASHINGS

- A. Membrane flashing installation shall progress concurrently with the roof membrane installation.
- B. All field membranes shall be terminated at parapets and roof edges with mechanical fasteners fastened into wood nailers at 12" on center.
- C. Extend flashing membrane minimum 8 inches above roofing level unless detailed otherwise. All flashing membranes shall be fully adhered with cut and hot air welded interior, exterior and mitered corners and shall extend minimum 5 inches onto field membrane.
- D. Utilize pre manufactured inside and outside corners, flashing cones, etc. to greatest extent possible.

#### 3.05 WALKWAYS

- A. Set walk pads in bed of adhesive, or as required by the manufacturer.
- B. Install walk pads at locations shown on drawings.
- C. Space walk pads as indicated or, if not indicated, space approximately 2-4 inches apart, or as specified by the manufacturer, where separate units are indicated.

#### 3.06 DRAINS AND SCUPPERS

- A. Flash drains and scuppers using PVC membrane per the manufacturer's current details.
- B. Flashing material shall cover the flange of the scupper,
- C. Install clamping ring if provided as part of the drain or scupper design. Install strainer baskets.

#### 3.07 ACCESSORY INSTALLATION

- A. Miscellaneous Items
  1. Prime metal flanges as required with a uniform coating of primer (as recommended by the roof membrane manufacturer). All flanges shall be set in a smooth even bed of waterblock sealant, or as detailed by the manufacturer..
  2. Overnight seals: Exercise care that moisture does not enter beneath completed section of the roof. Temporarily seal loose edges of the membrane daily and when weather is threatening. Night seals can be built using plastic cement and roofing felts, and constructed to withstand protracted periods of service. Night seals must be completely removed, all felts employed removed, prior to the resumption of roofing.
  3. All exposed cap sheet edges at waste stacks, vent stacks, etc., shall be caulked with sealant, tooled into the joint.

4. Raise conduit penetrations, insulated pipes, soil stacks, vents, and curbs as necessary to obtain an 8 inch height above the finished roof surface. Include rewiring and duct extension as necessary to raise or extend conduit or ducts.
5. Place conduit lying on the roof on new PT blocking placed on protection pad at a maximum of 8 feet on center. Adhere traffic pad to block, and not to roofing.
6. Electrical and mechanical work to be performed by journeyman worker experienced and trained in work performed to the building code.
7. Verify all drain lines and downspouts are functional prior to the start of work. Contractor to be responsible to assure drains are free draining upon completion of roofing work.
8. Install 1/4" x 1" aluminum termination bar to secure top edge of membrane at vertical wall surfaces. Fasten with anchors at 8" o.c.

### 3.08 TERMINATION BAR INSTALLATION

- A. Install termination bar in accordance with manufacturer's written instruction
- B. Install termination bar at all reglet and/or skirt flashing location
  1. Roof to wall transitions
  2. Equipment curbs
  3. Other locations as required by the manufacturer to meet warranty requirements
- C. Install water block sealant behind top of flashing. Anchor bar through pre-punched holes at a rate to maintain a seal (max 12" o.c.)
- D. Remove excess flashing material above bottom of lap sealant reservoir channel.

### 3.09 FIELD QUALITY CONTROL

- A. Manufacturer's Field Services:
  1. Require the roofing manufacturer's representative to perform inspection services during the roofing installation period.
  2. The roofing manufacturer's representative shall notify the General Contractor and roofing contractor immediately of all observed unacceptable conditions.
- B. Ponding Water: Perform flood tests, or utilize rain events, to identify areas of ponding.
  1. All depressions subject to ponding to a depth 1/2 inch or greater at any point shall be reviewed for repair options.
  2. Repair depressions replacing substrate that has deflected.

### 3.10 CLEANUP

- A. Remove all traces of splashed and spilled roofing materials.
- B. Repair or replace with new, as directed, adjacent surfaces permanently damaged from roofing application.

### 3.11 PROTECTION

- A. Protect newly installed materials from damage.
- B. No foot or wheel traffic, nor storage of roofing materials or material handling equipment will be permitted over the newly installed roofing.

- C. Equipment or materials stored on the new roof surface shall be placed on minimum 5/8" plywood, separated from the roof membrane by a polyethylene sheet to avoid bonding of plywood to the roof surface.

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 GENERAL REQUIREMENTS**

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions, Division-1 Specifications sections, and Owner's Special Conditions apply to work of this section.

### **1.02 SUMMARY**

- A. This Section includes sheet metal flashings and trim in the following categories
  1. Break-metal, formed gutter (from Kynar-coated metal)
  2. Install of PCV coated metals furnished under section 07 53 00
  3. Exposed trim
- B. Related Sections include the following:
  1. Section 07 53 00 for joint warranty provisions and for PVC clad flashings furnished under Section 07 53 00 but installed under Section 07 62 00.
  2. Section 07 90 00 Joint Sealants for field-applied sheet metal flashing and trim sealants.
  3. Section 10 81 13 grid wire bird deterrent system

### **1.03 PERFORMANCE REQUIREMENTS**

- A. General: Install sheet metal flashing and trim to withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failing.

### **1.04 SUBMITTALS**

- A. General: Submit each item in this Article in accordance with Section 01 33 00.
- B. Product Data: Submit manufacturer's material and finish data, installation instructions, and general recommendations for each specified flashing material and fabricated product.
- C. Submit shop drawings of each item specified showing layout, profiles, methods of joining, and anchorage details.
  1. Gutter profile and attachments
  2. Gutter straps
  3. Roof to wall transitions
  4. Downspout connections
- D. Qualification data for firms and persons specified in the "Quality Assurance" Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.

### **1.05 QUALITY ASSURANCE**

- A. Installer Qualification: Engage an experienced installer who has complete sheet metal flashing and trim in similar material, design, and extent to that indicated for this project and with a record of successful in-service performance.

### **1.06 REFERENCES**

- A. Conform to recommendations of "Architectural Sheet Metal Manual", latest edition issued by Sheet Metal and Air conditioning Contractor's National Association (SMACNA) insofar as



applicable for all metals.

- B. Fabricate and install flashings at roof edges to comply with recommendations of FM Loss Prevention Data Sheet 1-60 for the following wind zone:
  - 1. Wind Zone 1: Wind Pressures of 21 to 30 psf.
- C. ANSI/ASTM A446 - Steel Sheet, Zinc Coated, (Galvanized) by the Hot-Dip Process, structural (Physical) Quality.

#### 1.07 PROJECT CONDITIONS

- A. Coordinate work of this section with interfacing and adjoining work for proper sequencing of each installation. Ensure best possible weather resistance, durability of work, and protection of materials and finishes.

#### 1.08 WARRANTY

- A. Furnish manufacturer's written warranty covering failure of the coil-coated exterior finish on the sheet metal flashing. Warranty period is 20 years after the date of substantial completion. This warranty shall be in addition to and not a limitation of other rights the Owner may have against the contractor under the Contract Documents.
- B. Single source manufacturer's and installer's warranty for sheet metal flashings and PVC Roofing.

### **PART 2 – PRODUCTS**

#### 2.01 METALS

- A. Coil-Coated Galvanized Steel Sheet: Zinc-coated, commercial-quality steel sheet conforming to ASTM A 755, G90 (ASTM A 755 M, Z 275) coating designation, coil coated with high-performance fluoropolymer coating as specified in "Coil-Coated Galvanized Steel Sheet Finish" Article, with the following minimum properties:
  - 1. Fluoropolymer Coating: "Kynar 500" 70% resin finish coat baked-on for 15 minutes at 450 degrees F (232 degrees C), over 0.2 mil baked-on epoxy primer for a total film thickness of 1.0 mils, 30% reflective gloss (ASTM D 523).
  - 2. Durability: Provide coating which has been field tested under normal range of weathering conditions for minimum of 20 years without significant peel, blister, flake, chip, crack or check in finish, and without chalking in excess of 8 (ASTM D 659), and without fading in excess of 5 NBS units.
  - 3. Color:
    - a. AEP Span – "Cool Regal White"
- B. Galvanized Steel: Commercial quality with 0.20 percent copper, ASTM A 526 except ASTM A 527 for lock-forming, G90 hot-dip galvanized, mill phosphatized where indicated for painting; 24 gage except as otherwise indicated.
- C. Galvanized Steel to be field painted: Zinc coated (galvanized) steel sheet; ASTM A 653/A 653M, G90 (Z275) coating designation; structural quality, mill phosphatized for field painting.
- D. Stainless Steel: ASTM A 167, Type 304, soft annealed, with No. 2D finish, except where harder temper is required for forming or performance; minimum 26 ga. (0.477 mm) thick, unless otherwise indicated.

## 2.02 MISCELLANEOUS MATERIALS AND ACCESSORIES

- A. Screw and Nail Type Fasteners - General: Same metal as flashing/sheet metal or other non-corrosive metal as recommended by sheet manufacturer. Match finish of exposed heads with material being fastened.
- B. Gasketed Fasteners: #10 x 1 1/2 painted head hex head screws with separate neoprene gasketed stainless steel washers.
- C. Rivets: Stainless steel closed end pop-rivets, length as required.
- D. Provide all miscellaneous items as required for a complete and proper installation.
- E. Sealant Tape, butyl tape meeting TT-C-1796-A
  - 1. Tremco TremPro NGT
  - 2. Sika MultiSeal BT
  - 3. Bostik Butyl-Tape
- F. Separation Tape: 1/16" x 1/2" neoprene tape.
- G. Solder: For use with stainless steel & galvanized steel, provide 60-40 tin/lead solder (ASTM B 32), with acid- chloride type flux, except use rosin flux over tinned surfaces.
- H. Asphalt Mastic: SSPC-Paint 12, solvent-type asphalt mastic, nominally free of sulfur and containing no asbestos fibers, compounded for 15-mil (0.4 mm) dry film thickness per coat.
- I. Elastomeric Sealant: Generic type recommended by sheet metal manufacturer and fabricator of components being sealed and complying with requirements of joint sealants as specified in Section 07 90 00
- J. Paper Slip Sheet: 5-lb/square (0.244kg/sq) red rosin, sized building paper conforming to FS UU- B-790, type I, Style 1B.
- K. Roofing Cement: ASTM D 4586, Type I, asbestos free, asphalt based.

## 2.03 FABRICATION, GENERAL

- A. General Metal Fabrication: Shop-fabricated work to greatest extent possible. Comply with details shown, and with applicable requirements of SMACNA "Architectural Sheet Metal Manual" and other recognized industry practices.
- B. Fabricate for waterproof and weather-resistant performance; with expansion provisions for running work, sufficient to permanently prevent leakage, damage or deterioration of the work. Fabricate sheet metal to fit substrates.
- C. Comply with material manufacturer instructions and recommendations for forming material.
- D. Form exposed sheet metal work in 10' lengths without excessive oil-canning, buckling and tool marks, true to line and levels indicated, with exposed edges folded back to form hems.
- E. Seams: Fabricate nonmoving seams in factory-coated sheet metal with flat-lock seams. Tin edges to be seamed, form seams, and solder. Metal to be
- F. Expansion Provisions: Provide for thermal expansion of exposed sheet metal work. Space movement joints at maximum 10 feet intervals with no joints allowed within 24 inches of corner or intersection. Where lapped or bayonet-type expansion joints as detailed cannot be used or would not be sufficiently waterproof, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with mastic (concealed within joints).

- G. Soldered Joints: Clean surfaces to be soldered, removing oils and foreign matter. Prein edges of sheets to be soldered to a width of 1 1/2 inches, except where pretinned surfaces would show in finished work.
- H. Sealant Joints: Where moveable non-expansion type joints are indicated or required for proper performance of work, form metal to provide for proper installation of urethane sealant in compliance with SMACNA standards.
- I. Separate metal from no compatible metal or corrosive substrates by coating concealed surfaces at locations of contact with asphalt mastic or other permanent separation as recommended by manufacturer.
- J. Conceal fasteners and expansion provisions where possible. Exposed fasteners are not allowed on faces of sheet metal exposed to public view.
- K. Preparation for Shop Priming: Prepare surfaces of soldered galvanized steel fabrications to comply with minimum requirements indicated below for SSPC surface preparation specifications and environmental exposure on installed metal fabrications.
- L. Apply shop primer to surfaces of metal fabrications, unless otherwise indicated. Comply with requirements of SSPC-PA1 "Paint Application Specification No. 1" for shop painting.

#### 2.04 SHEET METAL FABRICATIONS

- A. General: Fabricate sheet metal items in thickness or weight needed to comply with performance requirements but not less than listed below for each application and metal.
- B. Exposed Trim, Gravel Stops, Fascia: Fabricated from the following material:
  - 1. Coil Coated Galvanized sheet steel: 24 gauge.
- C. Base Flashing: Fabricated from the following material:
  - 1. Stainless steel: 0.0187 inch (0.5 mm) thick.
- D. Counterflashing: Fabricated from the following material:
  - 1. Stainless steel: 0.0187 inch (0.5 mm) thick.
- E. Drip Edges: Fabricated from the following material:
  - 1. Factory Finished Galvanized sheet steel: 22 gauge.
  - 2. To match AEP Span "Cool Regal White"
- F. Roof-Penetrating Flashing: Fabricated from the following material:
  - 1. PMMA Liquid flashings as recommended by PVC roof manufacturer
- G. Non-exposed cleats, clips, closures and hooks: Fabricated from the following material:
  - 1. Galvanized steel, 20 gauge.
- H. Flashing Skirts: Fabricated from the following material:
  - 1. Stainless steel: 0.0187 inch (0.5 mm) thick.
- I. Gutters: Fabricated from the following materials:
  - 1. Coil Coated Galvanized sheet steel: 22 gauge
  - 2. To match AEP Span "Cool Regal White"
- J. Gutter Straps (at 24" oc):

1. Coil Coated Galvanized sheet steel: 22 gauge
2. To Match AEP Span "Cool Regal White"

## 2.05 GUTTER FABRICATION

- A. Fabricate to cross section indicated, with riveted and soldered joints, complete with end pieces, outlet tubes, and other accessories as required. Fabricate in minimum 96-inch long sections. Fabricated expansion joints and accessories from same metal as gutters unless otherwise indicated.

## PART 3 – EXECUTION

### 3.01 EXAMINATION

- A. Examine substrates and conditions under which sheet metal flashing and trim are to be installed and verify that work may properly commence. Do not proceed with installation until unsatisfactory conditions have been corrected.

### 3.02 INSTALLATION REQUIREMENTS

- A. General: Except as otherwise indicated, comply with manufacturer's installation instructions and recommendations, and with SMACNA "Architectural Sheet Metal Manual". Anchor units of work securely in place by methods indicated, providing for thermal expansion of metal units, conceal fasteners where possible, and set units true to line and level as indicated. Install work with laps, joints, and seams, laid away from southerly prevailing weather, which will be permanently watertight and weatherproof.
- B. Install exposed sheet metal work that is without excessive oil canning, buckling, and tool marks and that is true to line and levels indicated, with exposed edges folded back to form hems. Install sheet metal flashings and trim to fit substrates and to result in waterproof and weather-resistant performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
- C. Expansion provisions: Provide for thermal expansion of exposed sheet metal work. Space movement joints at maximum of 10 feet with no joints allowed within 24 inches of corner or intersection. Where lapped or bayonet-type expansion provisions in work cannot be used or would not be sufficiently weatherproof and waterproof, from expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with mastic sealant (concealed within joints).
- D. Soldered joints: Clean surfaces to be soldered, removing oils and foreign matter. Pre-tin edges of sheets to be soldered to a width of 1-1/2 inches, except where pre-tinned surface would show in finished work.
  1. Do not use torches for soldering. Heat surfaces to receive solder and flow solder into joint. Fill joint completely. Completely remove flux and spatter from exposed surfaces.
- E. Sealed joints: Form non-expansion, but movable, joints in metal to accommodate elastomeric sealant to comply with SMACNA standards. Fill joint with sealant and form metal to completely conceal sealant.
  1. Use joint adhesive for nonmoving joints specified not to be soldered.
- F. Seams: Fabricate nonmoving seams in sheet metal with flat-lock seams. Tin edges to be seamed, from seams, and solder.
- G. Separations: Separate metal from non-compatible metal or corrosive substrates by coating concealed surfaces, at locations of contact, with asphalt or other permanent separation as recommended by manufacturer.

1. Underlayment: Where installing stainless steel or aluminum directly on cementitious or wood substrates, install a slip sheet of red-rosin paper and a course of polyethylene underlayment
  2. Bed flanges of Work in thick coat of roofing cement where required for waterproof performance.
- H. Counterflashings: Coordinate installation of counterflashing with installation of assemblies to be protected by counterflashings. Install counterflashings in reglets or receivers. Secure in a waterproof manner by means of snap-in installation and sealant, lead wedges and sealant, interlocking folded seam, or blind rivets and sealant. Lap counterflashing joints a minimum of 2 inches (50 MM) and bed with sealant.
- I. Roof-Penetration Flashing: Coordinate roof-penetration flashing installation with roofing and installation of items penetrating roof. Install flashing as follows:
1. Turn lead flashing down inside vent piping, being careful not to block bent piping with flashing.
  2. Seal and clamp flashing to pipes penetrating roof, other than lead flashing on vent piping.

### 3.03 INSTALLATION OF GUTTERS

- A. Join sections with riveted and soldered joints or with lapped joints sealed with elastomeric sealant. Provide for thermal expansion with expansion joints as indicated or if not indicated not more than 20 feet. Attach gutters at eave or fascia to firmly anchored gutter brackets spaced not more than 24" apart. Provide end closures and seal watertight with sealant. Slope to downspouts.

### 3.04 CLEANING AND PROTECTION

- A. Clean exposed metal surfaces, removing substances which might cause corrosion of metal or deterioration of finishes, and promptly apply match touch-up paint to surface scratches and cut "raw" edges prior to exposure to weather.
- B. Installer shall advise Contractor of required procedures for surveillance and protection of flashings and sheet metal work during construction, to ensure that work will be without damage or deterioration, other than natural weathering, at time of substantial completion.

**END OF SECTION**

## **PART 1 – GENERAL**

### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of Contract, including General, Supplementary and Special Conditions and Division-1 Specification sections, apply to work of this section.

### **1.02 SUMMARY**

- A. Extent of each type of sealant work is indicated on drawings and by provisions of this section.
- B. This section includes sealants for the following applications
  - 1. Exterior joints: in the following vertical surfaces and non-traffic horizontal surfaces:
    - a. Joints between different materials.
    - b. Other joints as indicated.
- C. Related Sections include the following
  - 1. Section 07 53 00 PVC Roofing: sealants to be in compliance with roof manufacturer warranty requirements
  - 2. Section 07 62 00 Sheet Metal and Miscellaneous Flashing for sealing joints related to flashing.

### **1.03 SYSTEM PERFORMANCE REQUIREMENTS**

- A. Provide elastomeric joint sealants that have been produced and installed to establish and to maintain watertight and airtight continuous seal without causing staining or deterioration of joint substrates.

### **1.04 DELIVERY, STORAGE, AND HANDLING**

- A. Deliver materials to project site in original unopened containers or bundles with labels informing about manufacturer, project name and designation, color, expiration period for use, pot life, curing time and mixing instructions for multi-component materials.
- B. Store and handle materials to prevent their deterioration or damage due to moisture, temperature change, contaminants, or other causes.

### **1.05 SUBMITTALS**

- A. General: Submit in accordance with Section 01 33 00.
- B. Product data from manufacturers for each joint sealant required.
- C. Samples for initial selection purposes in form of manufacturer's standard bead samples, consisting of strips of actual products showing full range of colors available, for each product exposed to view.
- D. Certificates from manufacturers of joint sealants attesting that their products comply with specification requirements and are suitable for the use indicated.

### **1.06 QUALITY ASSURANCE**

- A. Installer Qualifications: Engage an experienced installer who has completed joint sealant application similar in material, design, and extent to that indicated for Project that have resulted in construction with a record of successful in-service performance.
- B. Single Source Responsibility for Joint Sealant Materials: Obtain joint sealant materials from a single manufacturer for each different product required.

### 1.07 PROJECT CONDITIONS

- A. Environmental Conditions: Do not proceed with installation of joint sealers under the following conditions:
  - 1. When ambient and substrate temperature conditions are outside the limits permitted by joint sealer manufacturers. Or below 40 deg F (4.4 deg C)
  - 2. When joint substrates are wet due to rain, frost, condensation, or other causes
- B. Joint Width Conditions: Do not proceed with installation of joint sealers when joint widths are less than allowed by joint sealer manufacturer for application indicated.
- C. Joint Substrate Conditions: Do not proceed with installation of joint sealers until contaminants capable of interfering with their adhesion are removed from joint substrates.

### 1.08 SEQUENCING AND SCHEDULING

- A. Sequence installation of joint sealers to occur not less than 21 nor more than 30 days after completion of waterproofing unless otherwise indicated.

### 1.09 WARRANTY

- A. Installer's warranty: Written warranty, signed by installer agreeing to repair or replace elastomeric joint sealants that do not comply with performance and other requirements specified in this Section within the specified warranty period.
  - 1. Warranty period: 2 years from the date of substantial completion
- B. Manufacturer's warranty: Written warranty, signed by elastomeric sealant manufacturer agreeing to furnish elastomeric joint sealants to repair or replace those that do not comply with performance and other requirements specified in this Section within specified warranty period.
  - 1. Warranty period: 10 years from the date of Substantial Completion

## **PART 2 – PRODUCTS**

### 2.01 MATERIALS, GENERAL

- A. Compatibility: Provide joint sealers, joint fillers and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by testing and field experience.
- B. Colors: Provide selection made by Engineer from manufacturer's standard colors for products of type indicated.

### 2.02 ELASTOMERIC JOINT SEALANTS

- A. Elastomeric Sealant Standard: Provide manufacturer's standard chemically curing, elastomeric sealant which complies with ASTM C 920 requirements, including those for Type, Grade, Class, and intended uses indicated in the 'Joint Sealant Schedule' located at end of this section.
- B. Available Products: Subject to compliance with requirements, elastomeric sealants that may be incorporated in the Work include, but are not limited to, the products specified in the "Joint Sealant Schedule" located at the end of this section.

### 2.03 TAPE SEALANTS

- A. Tape Sealant: Manufacturer's standard, solvent-free, butyl-based tape sealant with a solids content of 100 percent formulated to be non-staining, paintable, and non-migrating in contact with nonporous surfaces with or without reinforcement thread to prevent stretch and packaged

on rolls with a release paper on one side.

- B. Available Products: Subject to compliance with requirements, tape sealants that may be incorporated in the Work include, but are not limited to, the following:

1. "Extr-Seal Tape," Pecora Corporation
2. "Shim-Seal Tape," Pecora Corporation
3. "PTI 606," Protective Treatments, Inc.
4. "Tremco 440 Tape," Tremco, Inc.
5. "MBT-35," Tremco, Inc.

#### 2.04 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type which are non-staining; are compatible with joint substrates, sealants, primers and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Plastic Foam Backer Rod: Preformed, compressible, resilient, non-staining, non waxing, non extruding strips of flexible plastic foam of material indicated below and of size and shape, and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- C. Closed-cell polyethylene foam, nonabsorbent to liquid water and gas, non-out-gassing in un-ruptured state and with diameter 40% greater than the joint width.
- D. Bond Breaker Tape: Polyethylene tape or other plastic tape as recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint filler materials or joint surfaces at back or joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

#### 2.05 MISCELLANEOUS MATERIALS

- A. Primer: Provide type recommended by joint sealer manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from pre-construction joint sealer substrate and field tests.
- B. Cleaners for Nonporous Surfaces: Provide non-staining, chemical cleaner of type acceptable to manufacturer of sealant and sealant backing materials which are not harmful to substrates and adjacent nonporous materials.
- C. Masking Tape: Provide non-staining, non-absorbent type compatible with joint sealants and to surfaces adjacent to joints as applicable.
- D. Accessory Materials for Fire-Stopping Sealants: Provide forming, joint fillers, packing and other accessory materials for installation of fire-stopping sealants as applicable to installation conditions indicated.

### PART 3 – EXECUTION

#### 3.01 INSPECTION

- A. Require installer to inspect joints indicated to receive joint sealers for compliance with requirements for joint configurations, installation tolerances and other conditions affecting joint sealer performance.
- B. Do not allow joint sealer to proceed until unsatisfactory conditions have been corrected.



### 3.02 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealers to comply with recommendations of joint sealer manufacturers and the following requirements:
- B. Remove all foreign material from joint substrates which could interfere with adhesion and cohesion of joint sealer, including dust; paints, except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer; oil; grease; waterproofing; water repellents; water; surface dirt and frost.
- C. Clean concrete, masonry, unglazed surfaces of ceramic tile and similar porous joint substrate surfaces, by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealers. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air.
- D. Clean metal, glass, porcelain enamel, glazed surfaces of ceramic tile; and other non-porous surfaces by chemical cleaners or other means which are not harmful to substrates or leave residues capable of interfering with adhesion of joint sealers.
- E. Joint Priming: Prime joint substrates where indicated or where recommended by joint sealer manufacturer based on pre-construction joint sealer-substrate tests or prior experience. Apply primer to comply with joint sealer manufacturer's recommendations. Confine primer to areas of joint sealer bond; do not allow spillage or migration onto adjoining surfaces.
- F. Masking Tape: Use masking tape where required to prevent contact of sealant with adjoining surfaces which otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing seal.

### 3.03 INSTALLATION OF JOINT SEALERS

- A. General: Comply with joint sealer manufacturer's printed installation instructions, including "tooling" and all techniques applicable to products and applications indicated, except where more stringent requirements apply
- B. Elastomeric Sealant Installation Standard: Comply with recommendations of ASTM C 962 for use of joint sealants as applicable to materials, applications and conditions indicated.
- C. Latex Sealant Installation Standard: Comply with requirements of ASTM C 790 for use of latex sealants
- D. Installation of Sealant Backings: Install sealant backings to comply with the following requirements:
  - 1. Install joint fillers of type indicated to provide support of sealants during application and at position required to produce the cross-sectional shapes and depths of installed sealants relative to joint widths which allow optimum sealant movement capability.
    - a. Do not leave gaps between ends of joint fillers.
    - b. Do not stretch, twist, puncture, or tear joint fillers
    - c. Remove absorbent fillers which have become wet prior to sealant application and replace with dry material.
  - 2. Install bond breaker tape between sealants and joint fillers, compression seals, or back of joints where adhesion of sealant to surfaces at back of joints would result in sealant failure.

- E. Installation of Sealants: Install sealants by proven techniques that result in sealants directly contacting and fully wetting joint substrates, completely filling recesses provided for each joint configuration, and providing uniform, cross-sectional shapes and depths relative to joint widths which allow optimum sealant movement capability.
- F. Sill weeps: Where weep holes exist at joints to be replaced with sealant and at lintel joints above openings, provide weeps and install sealant to assure weeps remain functional.
- G. Tooling of Non-sag Sealants: Immediately after sealant application and prior to time skinning or curing begins, tool sealants to form smooth, uniform beads of configuration indicated, to eliminate air pockets, and to ensure contact and adhesion of sealant with sides of joint. Remove excess sealants from surfaces adjacent to joint. Do not use tooling agents which discolor sealants or adjacent surfaces or are not approved by sealant manufacturer.
  - 1. Provide concave joint configuration per Figure 6A in ASTM C 962, unless otherwise indicated.
    - a. Use masking tape to protect adjacent surfaces of recessed tooled joints

#### 3.04 PROTECTION AND CLEANING

- A. Protect joint sealers during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of substantial completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealers immediately and reseal joints with new materials to product joint sealer installations with repaired areas indistinguishable from original work.
- B. Clean off excess sealants or sealant smears adjacent to joints as work progresses by methods and with cleaning materials approved by manufacturers of joint sealers and of products in which joints occur.

#### 3.05 ELASTOMERIC JOINT SEALANT SCHEDULE

- A. Low-Modulus Polyurethane Joint Sealant:
  - 1. Base Polymer: polyurethane
  - 2. Type: S
  - 3. Grade: NS (Non sag)
  - 4. Class: 25
  - 5. Use Related to Exposure: NT (non-traffic)
  - 6. Products for use:
    - a. Sikaflex 1A
    - b. Sonneborne: Sonolastic NP-1
    - c. Vulkem 116
    - d. Or approved equal

**END OF SECTION**

## **PART 1 - GENERAL**

### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of contract, including Divisions 00 and 01 Specification Sections, apply to work of this section.

### **1.02 SECTION INCLUDES**

- A. Post and Wire Grid Bird Deterrent System
- B. Wire Array Bird Deterrent

### **1.03 SYSTEM DESCRIPTION**

- A. Post and Wire Bird Deterrent: wire grid bird deterrent system consisting of steel wire spanning between posts at a regular grid spacing.
- B. Bird Deterrent Wire Array: System designed to protect smaller raised areas from bird landings, such as HVAC equipment and small penthouses above the roof plane.

### **1.04 SUBMITTALS**

- A. Submittals:
  - 1. Product Data: Submit current product literature describing the proposed products with adequate specificity to determine compliance with the specifications. Where product data sheets, with multiple products, circle or otherwise indicate proposed products.
  - 2. Shop Drawings - Dimensioned plan layout showing relevant roof conditions, dimensions, system components and general layout.
  - 3. Sample warranty language.

### **1.05 PRODUCT DELIVERY STORAGE AND HANDLING**

- A. Delivery: Deliver materials in the manufacturer's original sealed and labeled containers and in quantities required to allow continuity of application.

### **1.06 QUALITY CONTROL**

- A. Certifications
  - 1. Materials under this section shall be furnish and installed by a manufacturer certified installer
- B. Inspections: Manufacturer's representative to verify installation is in accordance with manufacturer's warranty requirements

### **1.07 WARRANTY**

- A. Warranty: Provide manufacturer's 10-year material warranty on the system components, except for wires.

## **PART 2 – PRODUCTS**

### **2.01 BIRD DETERRENT SYSTEM**

- A. Manufacturers:
  - 1. Seagull Control Systems
  - 2. Bird Barriers

3. Bird-B-Gone
- B. Post and Wire System:
  1. Support posts
    - a. Material: 1.25" Schedule 40 aluminum tubing meeting ASTM B429.
    - b. Alloy: 6063-T6
    - c. Thickness: Inner diameter: 1.38"; outer diameter: 1.66". Wall thickness .14"
    - d. Accessories: Hole and slot with nylon plug for connecting the wire arrays.
    - e. Height: pole height varies; refer to drawings for height requirements
  2. Post Mounting Brackets: Provide custom fabricated welded aluminum brackets with welded aluminum pole holder with stainless steel set screw, fabricated by the manufacturer. Coordinate the required diameter and length of aluminum rods to fit within the support posts.
  3. Guy Wire Mounting Brackets: Provide custom fabricated welded aluminum brackets as needed, fabricated by the manufacturer.
  4. Grid Wire: high-visibility fluorescent polyethylene twine interwoven with stainless steel strands; with nickel-coated copper crimps
    - a. Bird Barriers "Fluorescent Grid Twine w/ SS"
    - b. Approved equal
  5. Accessories, Fasteners and Miscellaneous: Provide as required for installing a complete and functional bird deterrent system.
- C. Wire array bird deterrent: Permanent mounting base and stainless-steel wires that arch out from the base and move in a light breeze.
  1. Products:
    - a. Bird-B-Gone: "Bird Spider 360"
    - b. Bird Barriers: "Daddy Long Legs"
    - c. Approved Equal
  2. Performance requirements
    - a. Size: 4'
    - b. Materials: Arms – 316 stainless steel; base- UV protected PVC or polycarbonate
- D. Materials: All materials shall be corrosion-resistant in a marine environment. Uncoated galvanized steel is not permitted. Uncoated stainless steel shall be Type 316 to withstand corrosion in salt air.

### **PART 3 EXECUTION**

#### **3.01 COORDINATION**

- A. Review, coordinate and accommodate work of other trades that interface with, affect or are affected by the work of this section.
- B. Field Measure roofing area where bird deterrent system is to be installed. Verify the depth and condition for each installation surfaces.

### 3.02 INSTALLATION

- A. Install bird deterrent system in accordance with the manufacturer's installation requirements.
- B. When possible avoid roof penetrations. When direct attachment to roofing system is required, coordinate with roofing manufacture, and provide proper attachment, flashing and sealing per roofing manufacturer's instructions.

### 3.03 WORKMANSHIP

- A. Bird control devices shall be installed using the best workmanship in conformance with manufacturer's best practices.
- B. Any part of the bird control devices installed with improper or poor workmanship shall be removed and replaced at Contractor's expense.

### 3.04 FIELD QUALITY CONTROL

- A. Contractor Quality Control: Employ / assign quality control personnel to monitor the work of this section for conformance to the requirements of this section and to good construction practices.
- B. Contractor is solely responsible for managing and controlling the quality of the work and conformance with the requirements of this section

**END OF SECTION**

**Port of Tacoma**  
**WUT Admin & Marine Building Roof Project**

---

**Appendix A**  
**SWPPP Short Form**

## **CONSTRUCTION SWPPP SHORT FORM**

The threshold for using the Port of Tacoma's (Port) short form is a project that proposes to clear or disturb less than one acre of land. Projects falling within this threshold may use this short form instead of preparing a professionally designed Construction Stormwater Pollution Prevention Plan (SWPPP). If project disturbance quantities exceed this threshold, you must prepare of formal Construction SWPPP as part of your submittal package. If your project is within the threshold and includes—or may affect—a critical area, please contact the Port to determine if the SWPPP short form may be used.

# CONSTRUCTION STORMWATER POLLUTION PREVENTION PLAN SHORT FORM

Project Name:

Address:

Contact/Owner:

Phone:

Erosion Control Supervisor:

Phone:

Cell:

Pager:

Emergency (After hours) Contact:

Phone:

Permit No.:

Parcel No.:

## **Required Submittals**

A Construction SWPPP consists of both a project narrative and a site plan. The project narrative describes existing conditions on the site, the proposed conditions, and how construction site runoff will be managed until final site stabilization is achieved. Any additional relevant information should be included in the project narrative. All Best Management Practices (BMPs) that will be utilized onsite must be included as part of the project narrative and provided (electronically or hard copy) as part of the submittal package. If additional BMPs beyond those included in the Washington Department of Ecology's (Ecology) Western Washington Stormwater Management Manual (Ecology SWMM) or the City of Tacoma's (City) Stormwater Management Manual (City SWMM) are proposed to be used, a narrative and appropriate details describing the BMP (its function, installation method, and maintenance activities) will be required.

The site plan is a drawing which shows the location of the proposed BMPs to control erosion and sedimentation during and after construction activities.

The City's govMe site (<http://www.govme.org>) may be used to find much of the information needed to complete this form, such as adjacent areas, topography, critical areas, the downstream drainage path, and information concerning onsite features.

## **PROJECT NARRATIVE**

The Construction SWPPP Short Form narrative must be completed at part of the submittal package. Any information described, as part of the narrative, should also be shown on the site plan.

**Note:** From October 1 through April 30, clearing, grading, and other soil disturbing activities shall only be permitted by special authorization from the Port.



**A. Project Description (Check all that apply)**

- ☐ New Structure      ☐ Building Addition      ☐ Grading/Excavation  
☐ Paving      ☐ Utilities      ☐ Other:

1. Total project area \_\_\_\_\_ (square feet)
2. Total proposed impervious area \_\_\_\_\_ (square feet)
3. Total existing impervious area \_\_\_\_\_ (square feet)
4. Total proposed area to be disturbed \_\_\_\_\_ (square feet)
5. Total volume of cut/fill \_\_\_\_\_ (cubic yards)

Additional Project Information:

---



---



---

**B. Existing Site Conditions (Check all that apply)**

1. Describe the existing vegetation on the site. (Check all that apply)  
☐ Forest    ☐ Pasture/field grass    ☐ Pavement    ☐ Landscaping    ☐ Brush  
☐ Trees    ☐ Other:
2. Describe how surface water (stormwater) drainage flows across/from the site. (Check all that apply)  
☐ Sheet Flow    ☐ Gutter    ☐ Catch Basin    ☐ Ditch/Swale    ☐ Storm Sewer  
☐ Stream    ☐ Other:
3. Describe any unusual site condition(s) or other features of note.  
☐ Steep Grades    ☐ Large depression    ☐ Underground tanks    ☐ Springs  
☐ Easements    ☐ Existing structures    ☐ Existing utilities    ☐ Other:

**C. Adjacent Areas (Check all that apply)**

1. Check any/all adjacent areas that may be affected by site disturbance and fully describe below in item 2:  
☐ Streams\*    ☐ Lakes\*    ☐ Wetlands\*    ☐ Steep slopes\*  
☐ Residential Areas    ☐ Roads    ☐ Ditches, pipes, culverts    ☐ Other:

*\* If the site is on or adjacent to a critical area (e.g., waterbody), the Port may require additional information, engineering, and other permits to be submitted with this short form.*

2. Describe how and where surface water enters the site from properties located upstream:

---

---

---

---

---

3. Describe the downstream drainage path from the site to the receiving body of water (minimum distance of 0.25 mile [1320 feet]). (E.g., water flows from the site into a curb-line, then to a catch basin at the intersection of X and Y streets. A 10-inch pipe system conveys water another 1000 feet to a wetland.) Include information on the condition of the drainage structures.

---

---

---

---

---

**D. Soils (Check all that apply)**

The intent of this section is to identify when additional soils information may be required for applicants using this short form. There are other site-specific issues that may necessitate a soils investigation or more extensive erosion control practices. The Port will determine these situations on a case-by-case basis as part of their review.

1. Does the project propose infiltration? Infiltration systems require prior Port approval.

☐ Yes      ☐ No

2. Does the project propose construction on or near steep slopes (15% or greater)?

☐ Yes      ☐ No

If infiltration is proposed for the site or steep slopes (15% or greater) have been identified, the Port will require soils information as part of project design. The applicant must contact a soil professional or civil engineer that specializes in soil analysis and perform an in-depth soils investigation. If the Yes box is checked for either question, the Port may not permit the use of this short form.

## E. Construction Sequencing/Phasing

1. Construction sequence: the standard construction sequence is as follows:
  - Mark clearing/grading limits.
  - Install initial erosion control Best Management Practices (BMPs) (e.g., construction entrance, silt fence, catch basin inserts, etc.).
  - Clear, grade, and fill project site as outlined in the site plan while implementing and maintaining proper temporary erosion and sediment control BMPs simultaneously.
  - Install permanent erosion protection as described in the specifications (e.g., impervious surfaces, landscaping, etc.).
  - Remove temporary erosion control methods as permitted. Do not remove temporary erosion control until permanent erosion protection is fully established.

List any changes from the standard construction sequence outlined above:

---

---

---

---

2. Construction phasing: if construction is going to occur in separate phases, please describe:

---

---

---

---

---

## F. Construction Schedule

1. Provide a proposed construction schedule (dates construction starts and ends, and dates for any construction phasing.)

**Start Date:**

**End Date:**

Interim Phasing Dates:

Wet Season Construction Activities: Wet season occurs from October 1 to April 30. Please describe construction activities that will occur during this time period.

---

---

**Note:** Additional erosion control methods may be required during periods of increased surface water runoff.

## 2. Site plan

A site plan, to scale, must be included with this checklist that shows the following items:

- ☐ a. Address, Parcel Number, Permit Number, and Street Names
- ☐ b. North Arrow
- ☐ c. Indicate boundaries of existing vegetation (e.g., tree lines, grassy areas, pasture areas, fields, etc.)
- ☐ d. Identify any onsite or adjacent critical areas and associated buffers (e.g., wetlands, steep slopes, streams, etc.).
- ☐ e. Identify any FEMA base flood boundaries and Shoreline Management boundaries.
- ☐ f. Show existing and proposed contours.
- ☐ g. Delineate areas that are to be cleared and/or graded.
- ☐ h. Show all cut and fill slopes, indicating top and bottom of slope catch lines.
- ☐ i. Show locations where upstream run-on enters the site and locations where runoff leaves the site.
- ☐ j. Indicate existing surface water flow direction(s).
- ☐ k. Label final grade contour and indicate proposed surface water flow direction and surface water conveyance systems (e.g., pipes, catch basins, ditches, etc.).
- ☐ l. Show grades, dimensions, and direction of flow in all (existing and proposed) ditches, swales, culverts, and pipes.
- ☐ m. Indicate locations and outlets of any dewatering systems (usually to sediment trap).
- ☐ n. Identify and locate all erosion control methods to be used during and after construction.

**ONSITE FIELD VERIFICATION OF ACTUAL CONDITIONS IS REQUIRED.**

**Figure 1.** (see page 5 for Site Plan requirements)

## GUIDELINES FOR EROSION CONTROL ELEMENTS

**This SWPPP must contain the 12 required elements, as required by Ecology. Check off each element as it is addressed in the SWPPP short form and/or on your site plan.**

- ☐ 1. Mark Clearing Limits
- ☐ 2. Establish Construction Access
- ☐ 3. Control Flow Rates
- ☐ 4. Install Sediment Controls
- ☐ 5. Stabilize Soils
- ☐ 6. Protect Slopes
- ☐ 7. Protect Drain Inlets
- ☐ 8. Stabilize Channels and Outlets
- ☐ 9. Control Pollutants
- ☐ 10. Control Dewatering
- ☐ 11. Maintain BMPs
- ☐ 12. Manage the Project

The following is a brief description of each of the 12 required elements of a SWPPP. If an element does not apply to the proposed project site, please describe why the element does not apply. Applicable BMPs are listed with each element and in Table 1. Please note that this list is not a comprehensive list of BMPs available for small construction projects, but erosion and sediment control techniques most pertinent to small construction sites are included here. More detailed information on construction BMPs can be found in Ecology's SWMM Volume II and the City's SWMM Volume II (Ecology 2005; City of Tacoma 2012). Please provide hard copies of the BMPs that will be used for the project and include as part of this Construction SWPPP. BMPs that may be used if needed can be noted as being contingent in the event additional erosion control is needed. Describe any additional BMPs that will be utilized onsite and add them to the SWPPP short form.

For phased construction projects, clearly indicate erosion control methods to be used for each phase of construction.

*Element #1 – Mark Clearing Limits*

All construction projects must clearly mark any clearing limits, sensitive areas and their buffers prior to beginning any land disturbing activities, including clearing and grading. Clearly mark the limits both in the field and on the site plans. Limits shall be marked in such a way that any trees or vegetation that is to remain will not be harmed.

Applicable BMPs include:

- BMP C101: Preserving Natural Vegetation
- BMP C102: Buffer Zones
- BMP C103: High Visibility Plastic or Metal Fence
- BMP C104: Stake and Wire Fence

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #2 – Establish Construction Access*

All construction projects subject to vehicular traffic shall provide a means of preventing vehicle “tracking” soil from the site onto streets or neighboring properties. Limit vehicle traffic on- and off-site to one route if possible. All access points shall be stabilized with a rock pad construction entrance or other Port-approved BMP. The applicant should consider placing the entrance in the area for future driveway(s), as it may be possible to use the rock as a driveway base material. The entrance(s) must be inspected weekly, at a minimum, to ensure no excess sediment buildup or missing rock.

Applicable BMPs include:

- BMP C105: Stabilized Construction Entrance
- BMP C106: Wheel Wash
- BMP C107: Construction Road/Parking Area Stabilization

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #3 – Control Flow Rates*

Protect properties and waterways downstream of the project site from erosion due to increases in volume, velocity, and peak flow of stormwater runoff from the project site.

Permanent infiltration facilities shall not be used for flow control during construction unless specifically approved by the Environmental Department. Sediment traps can provide flow control for small sites by allowing water to pool and allowing sediment to settle out of the water.

Applicable BMPs include:

- BMP C207: Check Dams
- BMP C240: Sediment Trap

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---



*Element 4 – Install Sediment Controls*

Surface water runoff from disturbed areas must pass through an appropriate sediment removal device prior to leaving a construction site or discharging into a waterbody. Sediment barriers are typically used to slow stormwater sheet flow and allow the sediment to settle out behind the barrier.

Sediment controls must be installed/constructed prior to site grading.

Applicable BMPs include:

- BMP C208: Triangular Silt Dike
- BMP C232: Gravel Filter Berm
- BMP C233: Silt Fence
- BMP C235: Straw Wattles

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #5 – Stabilize Soils*

Stabilize exposed and unworked soils by applying BMPs that protect the soils from raindrop impact, flowing water, and wind.

From October 1 through April 30, no soils shall remain exposed or unworked for more than 2 days. From May 1 to September 30, no soils shall remain exposed or unworked for more than 7 days. This applies to all soils whether at final grade or not.

Applicable BMPs include:

- BMP C120: Temporary and Permanent Seeding
- BMP C121: Mulching
- BMP C122: Nets and Blankets
- BMP C123: Plastic Covering
- BMP C140: Dust Control

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #6 – Protect Slopes*

Protect slopes by diverting water at the top of the slope. Reduce slope velocities by minimizing the continuous length of the slope.

Applicable BMPs include:

- BMP C200: Interceptor Dike and Swale
- BMP C204: Pipe Slope Drains
- BMP C207: Check Dams

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #7 – Protect Drain Inlets*

All operable storm drain inlets must be protected during construction so that stormwater runoff does not enter the conveyance system without first being filtered or treated to remove sediment. Install catch basin protection on all catch basins within 500 feet downstream of the project.

Applicable BMPs include:

- BMP C220: Storm Drain Inlet Protection

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #8 – Stabilize Channels and Outlets*

Stabilize all temporary onsite conveyance channels. Provide stabilization to prevent erosion of outlets, adjacent stream banks, slopes, and downstream reaches at the conveyance system outlets.

Applicable BMPs include:

- BMP C202: Channel Lining
- BMP C209: Outlet Protection

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #9 – Control Pollutants*

Handle and dispose of all pollutants, including demolition debris and other solid wastes in a manner that does not cause stormwater contamination. Provide cover and containment for all chemicals, liquid products (including paint), petroleum products, and other materials. Handle all concrete and concrete waste appropriately.

Applicable BMPs include:

- BMP C150: Materials on Hand
- BMP C151: Concrete Handling
- BMP C152: Sawcutting and Surface Pollution Prevention
- BMP C153: Material Delivery, Storage and Containment

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---



---



---



---

*Element #10 – Control Dewatering*

Clean, non-turbid dewatering water, such as groundwater, can be discharged to the stormwater system provided the dewatering flow does not cause erosion or flooding of receiving waters. All other dewatering water shall be pumped to a settling container and taken offsite or discharged to the City sewer system. All discharges to the City sewer system require City approval, which may include a Special Approved Discharge (SAD) permit.

Applicable BMPs include:

- BMP C150: Materials on Hand

☐ The BMP(s) being proposed to meet this element are:

---



---

**OR**

☐ This element is not required for this project because:

---

---

---

---

*Element #11 – Maintain BMPs*

Maintain and repair temporary erosion and sediment control BMPs as needed. Inspect all BMPs at least weekly and after every storm event.

Remove all temporary erosion and sediment control BMPs within 30 days after final site stabilization or if the BMP is no longer needed. Any sediment trapped during construction activities should be removed or stabilized onsite. No sediment shall be discharged into the stormwater drainage system or any natural conveyance system (e.g., streams).

Applicable BMPs include:

- BMP C160: Certified Erosion and Sediment Control Lead

☐ The BMP(s) being proposed to meet this element are:

---

---

**OR**

☐ This element is not required for this project because:

---

---

---

---

*Element #12 – Manage the Project*

Phase development projects to prevent soil erosion and the transport of sediment from the project site during construction. Coordinate all work prior initial construction with subcontractors and other utilities to ensure no areas are worked prematurely.\

A designated erosion and sediment control person is required for all construction projects. This person is responsible for ensuring that the project's erosion and sediment control BMPs are appropriate for the site and are functioning properly. They are also responsible for updating the

SWPPP as necessary as site conditions warrant. They must be available 24 hours a day to ensure compliance.

Applicable BMPs include:

- BMP C160: Certified Erosion and Sediment Control Lead
- BMP C162: Scheduling
- BMP C180: Small Project Construction Stormwater Pollution Prevention

☐ The BMP(s) being proposed to meet this element are:

---

---

**OR**

☐ This element is not required for this project because:

---

---

---

---

**Table 1. Applicable BMPs for the 12 Elements of a SWPPP**

Element #1 – Mark Clearing Limits		
BMP C101	Preserving Natural Vegetation	
BMP C102	Buffer Zones	
BMP C103	High Visibility Plastic and Wire Fence	
BMP C104	Stake and Wire Fence	
Element #2 – Establish Construction Entrance		
BMP C105	Stabilized Construction Entrance	
BMP C106	Wheel Wash	
BMP C107	Construction Road/Parking Area Stabilization	
Element #3 – Control Flow Rates		
BMP C207	Check Dams	
BMP C240	Sediment Trap	
Element #4 – Install Sediment Controls		
BMP C208	Triangular Silt Trap	
BMP C232	Gravel Filter Berm	
BMP C233	Silt Fence	
BMP C235	Straw Wattles	
Element #5 – Stabilize Soils		
BMP C120	Temporary and Permanent Seeding	
BMP C121	Mulching	
BMP C122	Nets and Blankets	
BMP C123	Plastic Covering	
BMP C140	Dust Control	
Element #6 – Protect Slopes		
BMP C200	Interceptor Dike and Swale	
BMP C204	Pipe Slope Drains	
BMP C207	Check Dams	
Element #7 – Protect Drain Inlets		
BMP C220	Storm Drain Inlet Protection	
Element #8 – Stabilize Channels and Outlets		
BMP C202	Channel Lining	
BMP C209	Outlet Protection	
Element #9 – Control Pollutants		
BMP C150	Materials on Hand	

Element #9 – Control Pollutants, cont.		
BMP C151	Concrete Handling	
BMP C152	Sawcutting and Surfacing Pollution Prevention	
BMP C153	Materials, Delivery, Storage and Containment	
Element #10 – Control Dewatering		
BMP C150	Materials on Hand	
Element #11 – Maintain BMPs		
BMP C160	Certified Erosion and Sediment Control Lead	
Element #12 – Manage the Project		
BMP C160	Certified Erosion and Sediment Control Lead	
BMP C162	Scheduling	
BMP C180	Small Project Construction Stormwater Pollution Prevention	

## REFERENCES

City of Tacoma. 2012. Stormwater Management Manual 2012 Edition. Public Works/  
Environmental Services, Maintenance Division, Tacoma, Washington.

Washington State Department of Ecology (Ecology). 2005. Stormwater Management Manual  
for Western Washington. Water Quality Program, Lacey, Washington.



**Port of Tacoma  
WUT Admin & Marine Building Roof Project**

---

**Appendix B  
SEPA Exemption**

## MEMORANDUM

---

**DATE:** November 20, 2014  
**TO:** Port of Tacoma SEPA File  
**FROM:** Jennifer Stebbings  
**SUBJECT:** SEPA Exemption – Terminal and Shoreline Area Routine Maintenance and Repair

The Port of Tacoma (Port) currently owns multiple properties that require regular maintenance and repair to ensure a safe and efficient operation. The project sites are located on Port properties throughout the Tacoma Tideflats. All properties are zoned S-10 Port Industrial.

The project includes routine maintenance and repair work that will occur over a five year period commencing once the Port receives all necessary approvals, which may include a Nationwide 3 permit from the U.S. Army Corps of Engineers, a Hydraulic Project Approval from the Washington State Department of Fish and Wildlife, and a formal exemption letter from the City of Tacoma covering both Shoreline and Critical Area requirements.

The routine maintenance and repair activities apply to the following typical Port infrastructure: hanging and bolt-on fender systems and rub strips; bull rails; bollards; utilities (excluding stormwater infrastructure); power/gear switches; crane rails; dock surfaces (planks, pavement); other existing paved and impervious surfaces; building exteriors; containment berms; light poles; safety equipment and platforms; navigation lights; and cathodic protection systems. The following routine maintenance and repair activities are needed to maintain the integrity of Port infrastructure and to operate safely and efficiently.

**Hanging and bolt-on fender systems and rub strip repair:** Work will occur from existing piers located above and adjacent to marine waters and in the 100-year floodplain. To replace the fenders and rub strips, a derrick is maneuvered as close as possible to the wingwall where it holds the replacement fender or rub strip while the bolts are removed by hand. The original fender or rub strip is then lowered and loaded onto a barge or truck and removed from the site. The replacement fender or rub strip is then held and bolted into place.

**Bull rail repairs/maintenance:** Work will occur from existing piers located above and adjacent to marine waters and in the 100-year floodplain. No parts of the bull rail are in contact with the water. The bull rail and decking are generally installed manually using hand tools from the dock surface. However, on occasion, it will be necessary to use a forklift or backhoe to remove heavy sections.

**Bollard installation/relocation (includes mooring hardware):** Work will occur from existing piers located above and adjacent to marine waters and in the 100-year floodplain. The concrete of the bull rail and pile cap will be chipped away to expose the rebar, and holes will be drilled in the broken concrete surface. Dowels will be epoxied into the holes to provide solid anchoring points for the new concrete to help integrate the old and the new as one structure. The new bollard will be placed in position and integrated into the existing rebar and concrete and the pour will be formed up, then the new concrete will be poured and finished.

**Utility maintenance (excluding stormwater):** Work can occur from existing piers located above and adjacent to marine waters and within the 100-year floodplain. Maintenance in areas landward of the Ordinary High Water Mark (OHWM) may include trenching, backfilling and repaving.

Repair or replacement of underground utilities will require existing pavement to be saw cut and removed for trenching. Trenching will remove the subgrade material to allow access to the existing utilities. Once repairs are complete the trench will be backfilled with excavated material or new clean imported material. All excavated material not used will be stockpiled for testing and proper disposal offsite. Repaving will be conducted to match the existing surface, grade, and asphalt thickness.

Maintenance and repair of electrical equipment will be conducted based on the associated building and common industrial standard.

Warning system equipment maintenance and repair includes work on speaker arrays, strobes, and control cabinets that are located on poles in upland locations.

**Power/Switch gear maintenance:** Work may occur from existing piers located above and adjacent to marine waters and within the 100-year floodplain.

Maintenance and repair of electrical equipment will be conducted based on the associated building and common industrial standard.

**Crane rail repairs:** Work will occur from existing paved wharfs located above and adjacent to marine waters and within the 100-year floodplain. All work will occur from the surface of the existing paved wharf.

**Deck repairs including re-planking of dock surfaces (wood):** Work will occur above and adjacent to marine waters and within the 100-year floodplain. Specifically, deteriorated timber planks will be removed and replaced with new timber planks. No in-water work will occur; all equipment will be positioned on the dock itself; and no increase in footprint or overwater coverage is proposed.

The deteriorated timber will be removed by cutting with a chainsaw and lifting out either by hand or with a truck-mounted davit. Due to the severe constraints beneath the dock, the Port will not be able to employ work floats or tarps to capture falling debris; however, workers will operate a vacuum while using power tools to cut decking, and skim any debris that may escape the vacuum to minimize impacts to the waterbody. Replacement timbers will be installed using hand tools.

**Re-paving existing paved areas:** Work will occur landward of the OHWM and may occur within the 100-year floodplain. The old surface will be milled away. An application of a tack coat will be applied and a new layer asphalt will then be laid down with paving machines and rollers.

**Exterior building repairs and maintenance:** Work will occur above and adjacent to marine waters and within the 100-year floodplain. Maintenance and repair work will be conducted from improved areas surrounding existing buildings. Typical equipment may include lifts, scaffolding, and trucks. Landscaping maintenance is limited to the immediate area surrounding buildings and parking areas that are not part of a restoration, mitigation, or other area that is not already regularly maintained.

**Containment berm installation and maintenance:** Work will occur landward of the OHWM and may occur within the 100-year floodplain. Typical equipment used to construct a containment berm includes trucks and paving equipment.

**Light pole maintenance:** Work will occur above and adjacent to marine waters and within the 100-year floodplain. Typical equipment will include lifts and trucks.

**Maintenance of safety equipment:** Work will occur above and adjacent to marine waters and within the 100-year floodplain. Safety equipment will be installed using hand tools on the dock surface or with the use of a boom truck operated from the dock or a barge. Workers will operate a vacuum while using power tools to cut decking in over water areas and skim any debris that may escape the vacuum to minimize waterbody impacts.

Safety ladders are approximately 30 feet long and 24 inches wide and are mounted to the face of the wharf or pier (please see Figure 1 for standard dimensions). Life rings and their housing are approximately 2 feet by 2 feet and are mounted to the top of the wharf or pier.

**Navigation light maintenance and replacement:** Work will occur above and adjacent to marine waters and within the 100-year floodplain. Navigation lights will be accessed by boat and replaced with hand tools.

**Safety platform maintenance:** Work will occur above and adjacent to marine waters and within the 100-year floodplain. Line platforms will be accessed from the pier and will be maintained with hand tools and/or use of a boom truck operated from the pier.

**Cathodic protection system repair/maintenance:** Work will occur within the 100 year floodplain above and in marine waters. Repair and maintenance will be done with hand tools from a floating work platform and/or by divers.

The Port of Tacoma will ensure that the maintenance activities do not harm wildlife, vegetation or other elements of the shoreline environment. In addition to the following BMPs, the maintenance activities will be designed to comply with applicable federal, state and local laws and regulations to avoid and minimize adverse impacts to the aquatic environment.

**The following BMPs apply to all maintenance activities:**

- Each activity will comply with the Washington Department of Fish and Wildlife Hydraulic Project Approval requirements including timing restrictions to protect juvenile salmonid migration.
- Each activity will comply with water quality restrictions imposed by the Washington Department of Ecology and implement corrective measures if water quality standards are exceeded.
- If a contractor performs the maintenance activities, they will be required to prepare a Spill Prevention, Control and Countermeasures plan (SPCC). The SPCC plan will describe how the contractor will store all fuels and hazardous substances that may be onsite during construction. It will include procedures that the contractor will follow in the event of a fuel or chemical spill, and will require the contractor to have a spill response kit that will prevent spilled material from entering surface waters. The plan will also include emergency phone numbers and contacts that will be made in the event of a spill.
- No petroleum products, hydraulic fluids, chemicals, or any other polluting substances shall be allowed to enter waters of the state.
- Fuel hoses, oil drums, oil or fuel transfer valves and fittings, etc., will be checked regularly for drips or leaks, and shall be maintained and stored properly with secondary containment to prevent spills.
- Once the activity is complete, all temporary work structures, devices, equipment, materials, man-made debris and wastes from the project shall be completely removed from the shoreline.
- Temporary floating work platforms will not disturb eelgrass, kelp, and/or intertidal wetland vascular plants.
- Work that could result in debris and substances entering waters of the state shall include a containment structure capable of collecting all debris and substances. Where space or worker safety constraints preclude the use of such structures, workers will operate a vacuum

while using power tools to cut or drill, and will skim any debris that may escape the vacuum to minimize waterbody impacts.

- No stockpiling or staging of materials will occur waterward of the OHWM of any waterbody, except for when work is occurring on a paved wharf/pier. Stockpiles will be covered with plastic to prevent contact with the elements and erosion.
- All areas for equipment fuel storage will be located 150 feet from open water or wetlands.
- Fueling and servicing of all equipment will be confined to an established staging area that is at least 150 feet from open water or wetlands.
- A spill kit with oil-absorbent materials is on site to be used in the event of a spill.
- Deck and storm drain inlets will be protected to prevent sediment and contaminants from entering the waterways or storm drain system.
- Proper BMPs such as a silt fence and/or straw wattles will be used to provide a physical barrier to sediment and prevent runoff.

BMPs specific to the maintenance activity include, but are not limited to:

**Hanging and bolt-on fender systems and rub strip repair**

- A small barge, wood and/or cloth barrier will be used to catch debris to prevent it from falling into the water.

**Bull rail repairs/maintenance**

- A small barge, wood and/or cloth barrier will be used to catch debris to prevent it from falling into the water.

**Bollard installation/relocation (includes mooring hardware)**

- Stormwater BMPs will be in place to ensure that concrete dust is not carried through the deck drains on the wharf/pier, and to ensure that stormwater does not contact wet or fresh concrete.
- A small barge, wood and/or cloth barrier will be used to catch the concrete as it is chipped to prevent it from falling into the water.
- Concrete forms will be completely sealed on the bottom and sides to prevent wet concrete from escaping and dropping into the water.
- Washwater and leftover concrete product will not be allowed to drain onto the deck or into storm drains or allowed to drain to waters of the state.

**Utility maintenance (excluding stormwater)**

- Work that could result in debris and substances entering waters of the state shall include a containment structure capable of collecting all debris and substances.
- Stormwater BMPs will be in place to ensure that concrete dust is not carried through the deck drains on the pier/wharf, and to ensure that stormwater does not contact wet or fresh concrete.
- Slurry, cuttings, or process water will not be allowed to drain to waters of the state or stormwater conveyance systems.

**Power/Switch gear maintenance**

- Stormwater BMPs will be in place to ensure that concrete dust is not carried through the deck drains on the pier/wharf, and to ensure that stormwater does not contact wet or fresh concrete.
- Washwater and leftover concrete product will not be allowed to drain onto the deck or into storm drains or allowed to drain to waters of the state.

#### **Crane rail repairs**

- Work that could result in debris and substances entering waters of the state shall include a containment structure capable of collecting all debris and substances.
- Stormwater BMPs will be in place to ensure that concrete dust is not carried through the deck drains on the pier/wharf, and to ensure that stormwater does not contact wet or fresh concrete.
- Slurry, cuttings, or process water will not be allowed to drain to waters of the state or stormwater conveyance systems.
- Concrete forms will be completely sealed on the bottom and sides to prevent wet concrete from escaping and dropping into the water.
- Washwater and leftover concrete product will not be allowed to drain to deck or storm drains or allowed to drain to waters of the state.

#### **Deck repairs including re-planking of dock surfaces (wood)**

- Work floats or tarps will be used to capture any falling debris to prevent any material from entering the waterway. Where such space or worker safety constraints preclude the use of such structures, workers will operate a vacuum while using power tools to cut or drill, and will skim any debris that may escape the vacuum to minimize waterbody impacts.
- Excess or waste materials will not be allowed to enter waters of the state. All such materials will be collected and recycled or disposed of at an approved upland facility.
- Wood treated with creosote or pentachlorophenol will not be used.
- Any deck overlay removal and/or replacement must have a sound subsurface that will prevent existing or new overlay material from entering waters of the state.

#### **Re-paving existing paved areas**

- Slurry, cuttings, or process water will not be allowed to drain to waters of the state or stormwater conveyance systems.
- Washwater and leftover concrete product will not be allowed to drain to deck or storm drains or allowed to drain to waters of the state.

#### **Exterior building repairs and maintenance**

- Slurry, cuttings, or process water will not be allowed to drain to waters of the state or stormwater conveyance systems.
- Work that could result in debris and substances entering state water shall include a containment structure capable of collecting all debris and substances.

#### **Containment berm installation and maintenance**

- Slurry, cuttings, or process water will not be allowed to drain to waters of the state or stormwater conveyance systems.

#### **Light pole maintenance**

- Slurry, cuttings, or process water will not be allowed to drain to waters of the state or stormwater conveyance systems.

#### **Safety equipment installation/relocation (ladders, flotation devices, etc.)**

- A small barge, wood and/or cloth barrier will be used to catch debris to prevent it from falling into the water.

#### **Navigation light maintenance and replacement**

- Work that could result in debris and substances entering waters of the state shall include a containment structure capable of collecting all debris and substances.

**Safety platform maintenance**


- A small barge, wood and/or cloth barrier will be used to catch debris to prevent it from falling into the water.

**Cathodic protection system repair/maintenance**

Work that could result in debris and substances entering waters of the state shall include a containment structure capable of collecting all debris and substances.

SEPA Finding: The Port of Tacoma, as lead agency, has determined that there is no establishment, change, or material expansion in use for the project and it is categorically exempt from SEPA review based on the criteria described in WAC 197-11-800(3).

**WAC 197-11-800(3): Repair, remodeling and maintenance activities—**The following activities shall be categorically exempt: The repair, remodeling, maintenance, or minor alteration of existing private or public structures, facilities or equipment, including utilities, involving no material expansions or changes beyond that previously existing; except that, where undertaken wholly or in part on lands covered by water, only minor repair or replacement of structures may be exempt (examples include repair or replacement of pilings, ramps, floats, or mooring buoys, or minor repair, alteration, or maintenance of docks.



Tony Warfield  
Senior Environmental Project Manager

11/25/14  
Date

**Port of Tacoma**  
**WUT Admin & Marine Building Roof Project**

---

**Appendix C**  
**Shoreline Substantial**  
**Development Permit Exemption**





City of Tacoma  
Planning and Development Services

April 6, 2020

Jennifer Stebbings  
Port of Tacoma  
P.O. Box 1837  
Tacoma, WA 98401

RE: Shoreline Substantial Development Permit Exemption  
File No. LU20-0052, Facilities Maintenance, Multiple Sites

Dear Ms. Stebbings:

You have requested an exemption from a Shoreline Substantial Development Permit to allow the repair and maintenance of legally established Port facilities at multiple sites located in the Port of Tacoma, within the "S-10" Port Industrial and "S-13" Waters of the State Shoreline Districts. The maintenance activities received prior approval under a previously issued exemption which has expired (SHR2014-400000237530) and include the following:

- Hanging and bolt-on fender systems and rub strip repair
- Bull rail repairs/maintenance/replacement
- Bollard installation/relocation (includes mooring hardware)
- Utility maintenance (excluding stormwater), including the repair and replacement of electric, domestic water, fire water, communications and warning systems
- Power/Switch gear maintenance, including upgrades and increasing capacity allowed per code
- Crane rail repairs
- Deck repairs including re-planking of dock surfaces (wood)
- Re-surfacing existing impervious areas (paved areas and gravel areas)
- Exterior building repairs and maintenance, including windows, doors, siding, landscaping, roofing, and associated equipment (e.g., HVAC, etc.).
- Containment berm installation and maintenance
- Light pole maintenance
- Safety equipment maintenance, including safety ladders, life rings, and floatation devices and navigation lights
- Safety platform maintenance
- Cathodic protection system repair/maintenance

The majority of the work is anticipated to take place on or from the surface of existing piers and wharves, which are above or adjacent to the waterway and within the floodplain. Work on existing buildings and paved areas will be landward of the OHWM. Exceptions to this include replacement of navigation lights, done from boats, and in-water work such as the installation of cathodic protection systems.

For each maintenance project, best management practices (BMPs) will be used to ensure no deleterious material enters the waters of the state, and will comply with water quality standards and habitat protection standards per the State of Washington. Port of Tacoma employees and/or its contractors will prepare spill prevention plans. Further, following work, each site will be returned to its current state.

Attachment "A" shows the locations of the proposed work.

An exemption from the Substantial Development Permit requirements does not constitute an exemption from the policies and use regulations of the Shoreline Management Act, the provisions of this Master Program, and other applicable City, state, or federal permit requirements. The proposed repairs are consistent with the policies of the Tacoma Shoreline Master Program (TSMP) and the maintenance exemption in TSMP 2.3.3, as they are intended to prevent the cessation of lawfully-established uses.

The sites are located in or adjacent to marine waters and shorelines that are regulated critical areas. The sites have been reviewed in consideration of the critical area policies and regulations of the TSMP and provided the maintenance work adheres to the many BMPs provided, the activities are unlikely to cause substantial adverse impacts to the shoreline environment.

Pursuant to WAC 197-11-800, subsection (3) and the City of Tacoma's SEPA Procedures, this proposed action is categorically exempt from the Threshold Determination and Environmental Impact Statement requirements of SEPA.

Based on the above findings, the requested exemption to the City's Shoreline Substantial Development Permit requirement is consistent with the policies of the SMA, the policies and implementing regulations of the TSMP and with the criteria set forth in the WAC and RCW for the authorization of such exemptions.

The following are conditional **requirements**:

**Conditions**

1. The applicant shall apply for and receive approval of any required building permit from the City of Tacoma prior to any work.
2. The applicant shall follow all proposed installation and construction methods and best management practices for minimizing unintended impacts during repair and maintenance of all structures.
3. All trash and unauthorized fill, including concrete blocks or pieces, bricks, asphalt, metal, treated wood, glass, floating debris, and paper, below the OHWM in and around the applicant's repair project areas shall be removed and deposited at an approved upland disposal site.
4. No stockpiling or staging of materials will occur below the OHWM of any water body.
5. All shoreline work shall be completed within the approved work windows designated by the Washington State Department of Fish and Wildlife (WDFW).
6. The applicant shall notify the City of Tacoma and pertinent state and federal agencies should an unexpected spill of fuel or other chemicals occur in Commencement Bay or associated waterways.
7. The City of Tacoma is not the only agency with jurisdiction over the project area. The applicant is responsible for coordinating any required reviews and/or approvals with the

WDFW, Washington State Department of Ecology, and U. S. Army Corps of Engineers and shall provide documentation to the City of Tacoma.

8. This exemption shall be valid for a period not to exceed 5 years from the date of issuance. Should the Shoreline Master Program be revised prior to the completion of this project, additional review may be required.

In addition, the applicant is advised of the following:

- This permit is only applicable to the proposed project as described above and based upon the information submitted by the applicant. Modifications to this proposal and future activities or development within the regulated buffers may be subject to further review and additional permits as required in accordance with the *Tacoma Municipal Code*.
- The applicant must obtain other approvals prior to construction as required by other local, state and federal agencies. The City of Tacoma is not the only reviewing agency with jurisdiction over the project area. The Army Corps of Engineers and State Department of Fish and Wildlife have requirements regarding work within regulated waters that may be applicable to the project.
- This exemption is applicable only to areas within 200 feet of the OHWM of waters of the state. It is not meant to constitute an exemption from *TMC* 13.11 Critical Areas. Should work outside the Shoreline jurisdiction occur within vicinity of a non-associated critical area, additional review may be required.

We are issuing this letter of exemption per the provisions of *TMC* Section 13.10 to comply with the requirements of *WAC* 173-27-050 and *WAC* 173-27-040. Should you have any further questions or requests please do not hesitate to contact me at 253-591-5121.

Sincerely,




Shannon Brenner  
Environmental Specialist

cc via regular and electronic mail:

Washington Department of Ecology, Shorelands & Environmental Assistance Program, Zach Meyer,  
SWRO, P.O. Box 47775, Olympia, WA 98504-7775 (zmeyer461@ecy.wa.gov)  
Washington Department of Fish and Wildlife, Elizabeth Bockstiegel, 600 Capitol Way N., Olympia,  
WA 98501-1091 (elizabeth.bockstiegel@dfw.wa.gov)  
U.S. Army Corps of Engineers, Attn: Regulatory Branch, CENWS-OD-RG Attn: Halie Endicott, P.O.  
Box C-3755, Seattle, WA 98124 (halie.endicott@usace.army.mil)  
U.S. Fish & Wildlife Service, Attn: Judy Lantor, 510 Desmond Drive SE #102, Lacey, WA 98503  
(jusdy\_lantor@fws.gov)



Document Path: \\apps.portoftacoma.com\GIS\UserProjects\Environmental\Stebbings\Programmatic Maintenance\2020\0211\_VicinityMap\_ProgMaint.mxd

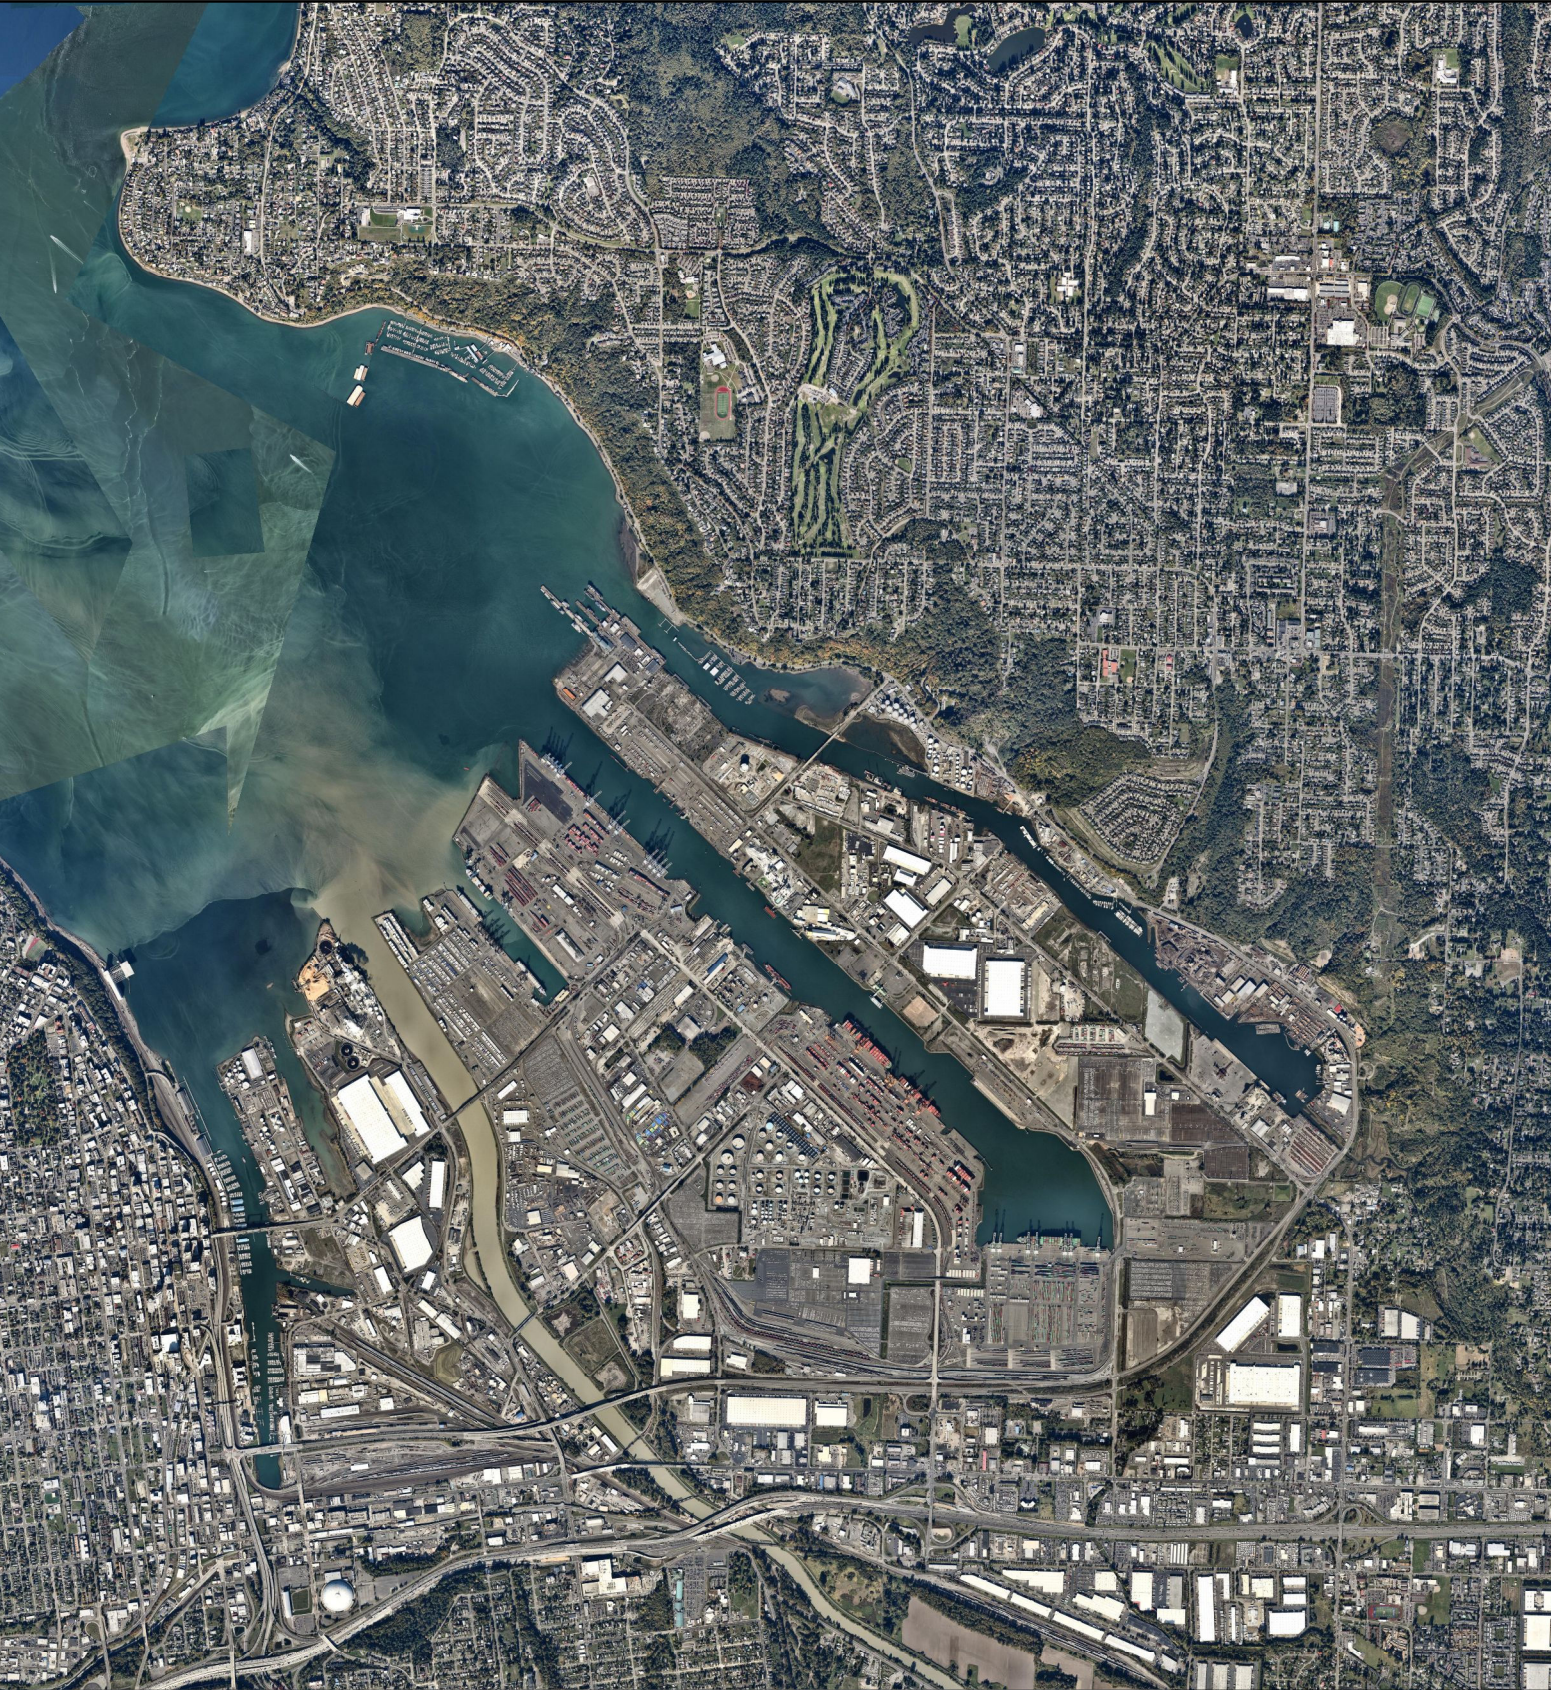


**FIGURE 1 - Vicinity Map**

REFERENCE: NWS-2014-1149-WRD  
PROJECT: Port-wide Maintenance  
APPLICANT: Port of Tacoma  
LOCATION: Tacoma, WA

IN: Commencement Bay  
NEAR: Tacoma  
COUNTY: Pierce  
STATE: Washington


- ADJACENT LANDOWNERS:**
- 1. Puyallup Tribe of Indians
  - 2. City of Tacoma
  - 3. WSDOT
  - 4. Private Landowners

SHEET: 1 OF 6  
DATE: 2/11/2020  
AUTHOR: Jenn Stebbings

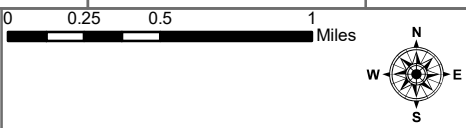

**Attachment "A"**



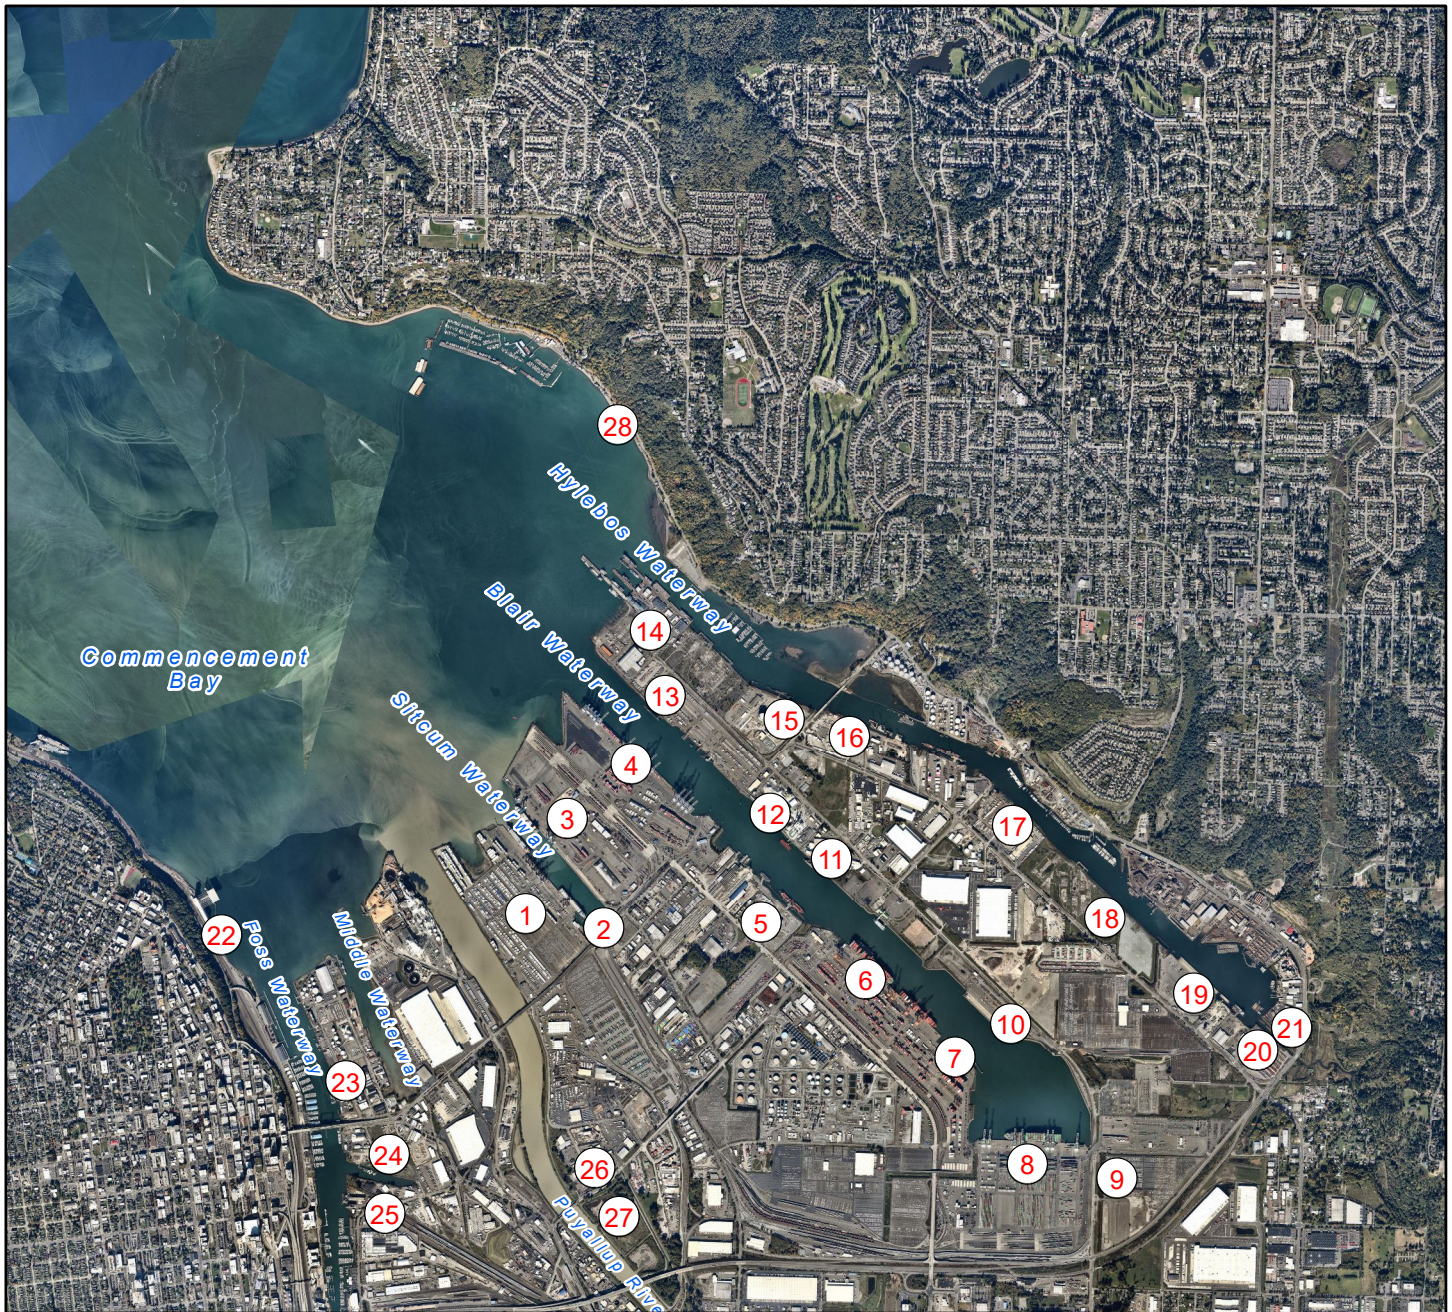

1 WEST SITCUM TERMINAL	8 PCT	15 PSE	22 TEMCO
2 PORT ADMIN BLDG	9 PARCEL 15	16 STEAMPLANT	23 YOUTH MARINE
3 TERMINAL 7 A-D	10 EB-1	17 CARLILE	24 WATTLES
4 HUSKY TERMINAL	11 GP GYPSUM	18 PARCEL 99	25 PARCEL 92
5 PARCEL 125	12 PARCEL 115	19 PARCEL 105	26 2002 STEWART
6 WUT	13 TOTE	20 PARCEL 86	27 GOG-LE-HI-TE
7 BLAIR DOCK	14 TRIDENT/EBC	21 CALBAG	28 D.G. KAYAK LAUNCH

**FIGURE 02**





PO Box 1837 Tacoma, WA 98401 (253) 383-5841


REFERENCE #: NWS-2014-1149-WRD  
 APPLICANT NAME: Port of Tacoma  
 PROJECT: Programmatic Port-wide Maintenance  
 LOCATION: Tacoma, WA

SHEET 2 of 6

DATE: 02/11/2020





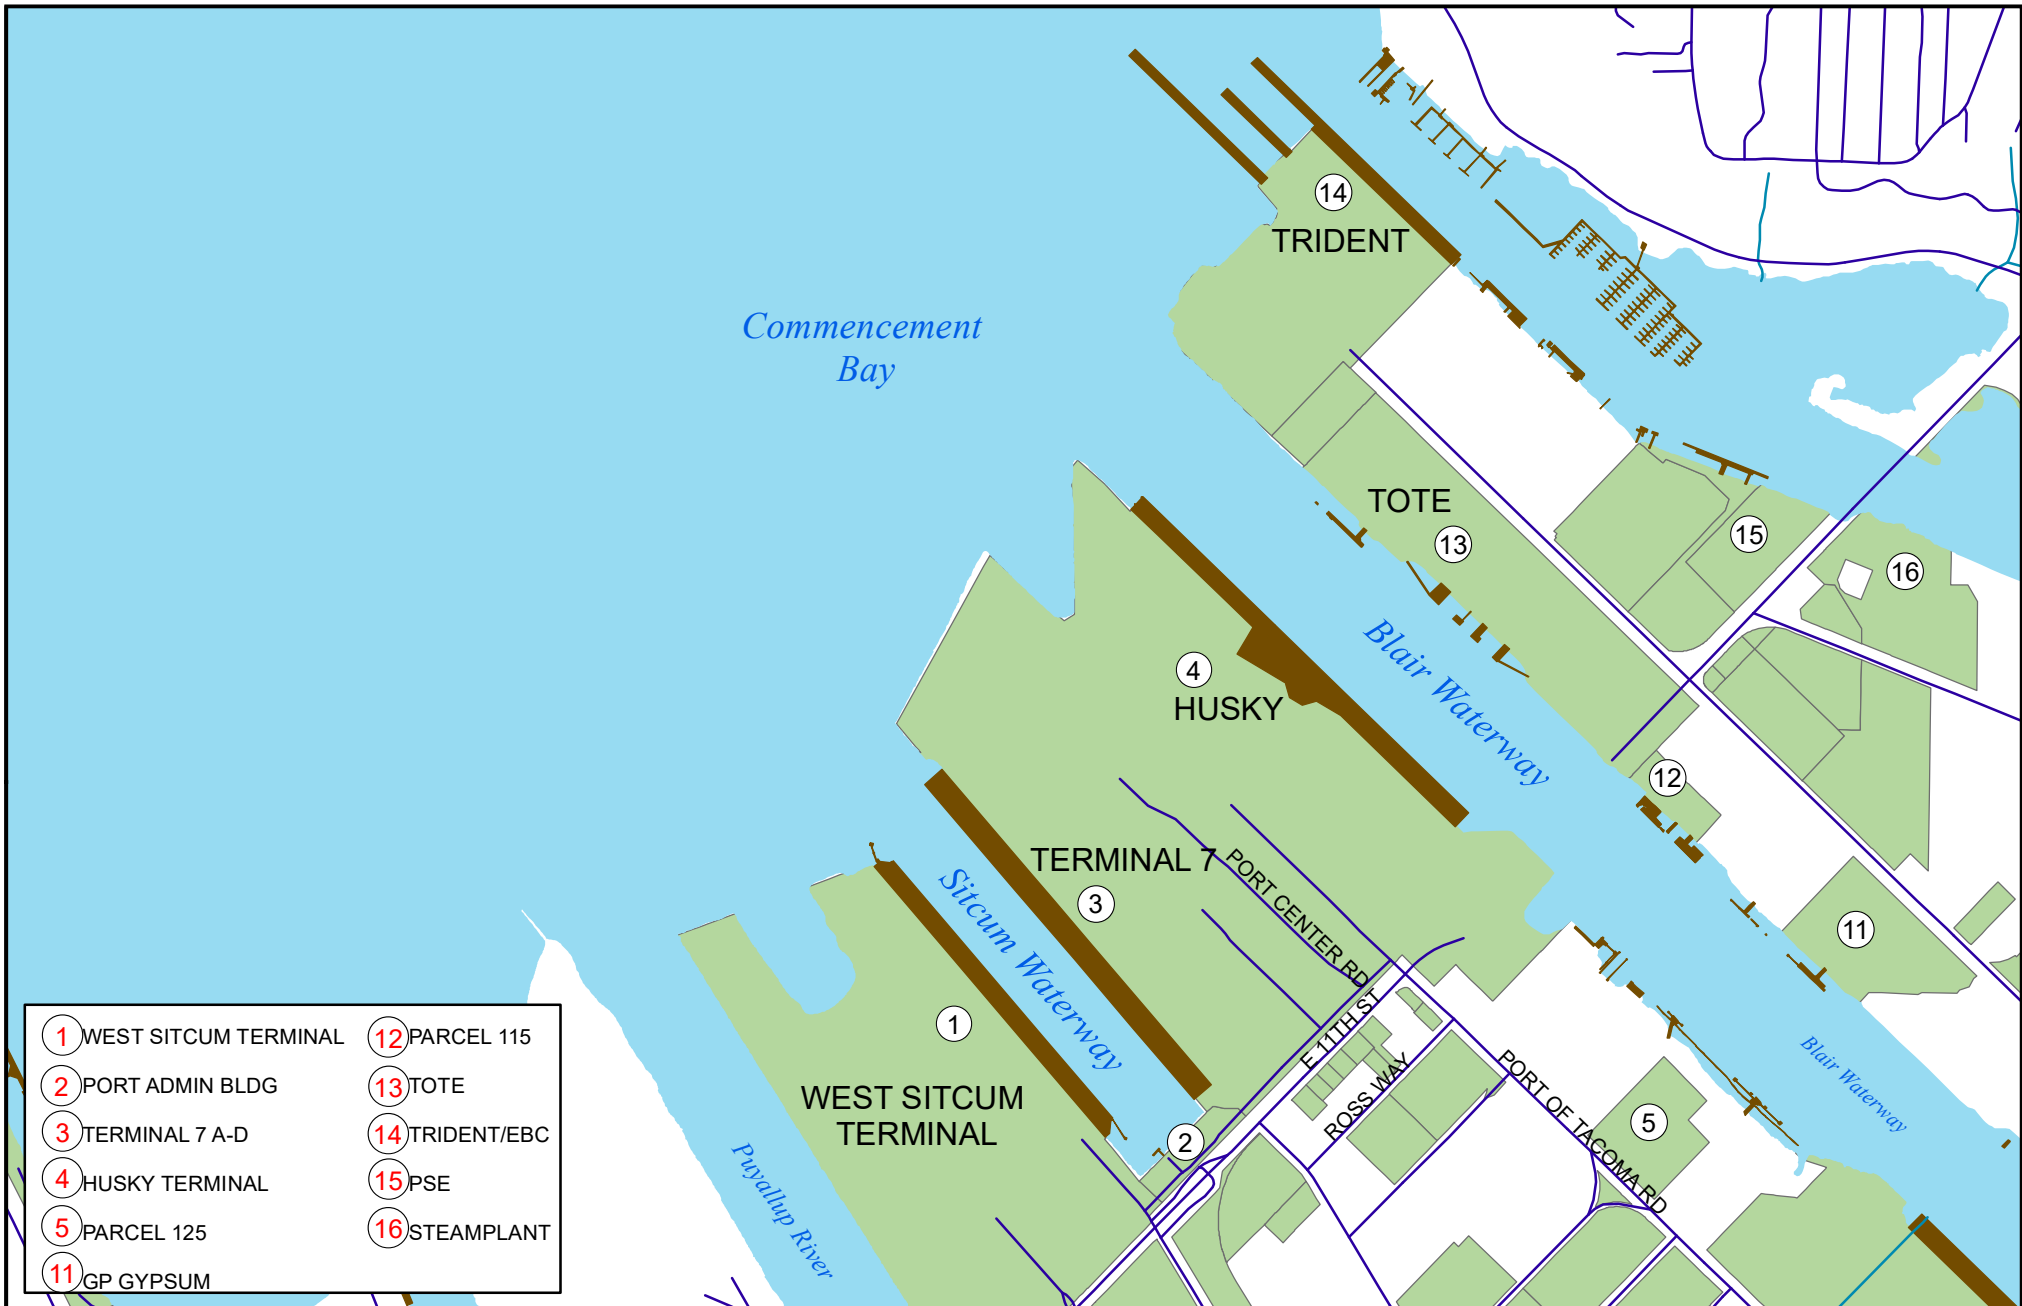


**FIGURE 03**

**REFERENCE #: NWS-2014-1149-WRD**


**APPLICANT NAME: Port of Tacoma**

**PROJECT: Programmatic Port-wide Maintenance**

**LOCATION: Tacoma, WA**



- Roads
- Creek
- Piers
- Waterways
- PortParcels

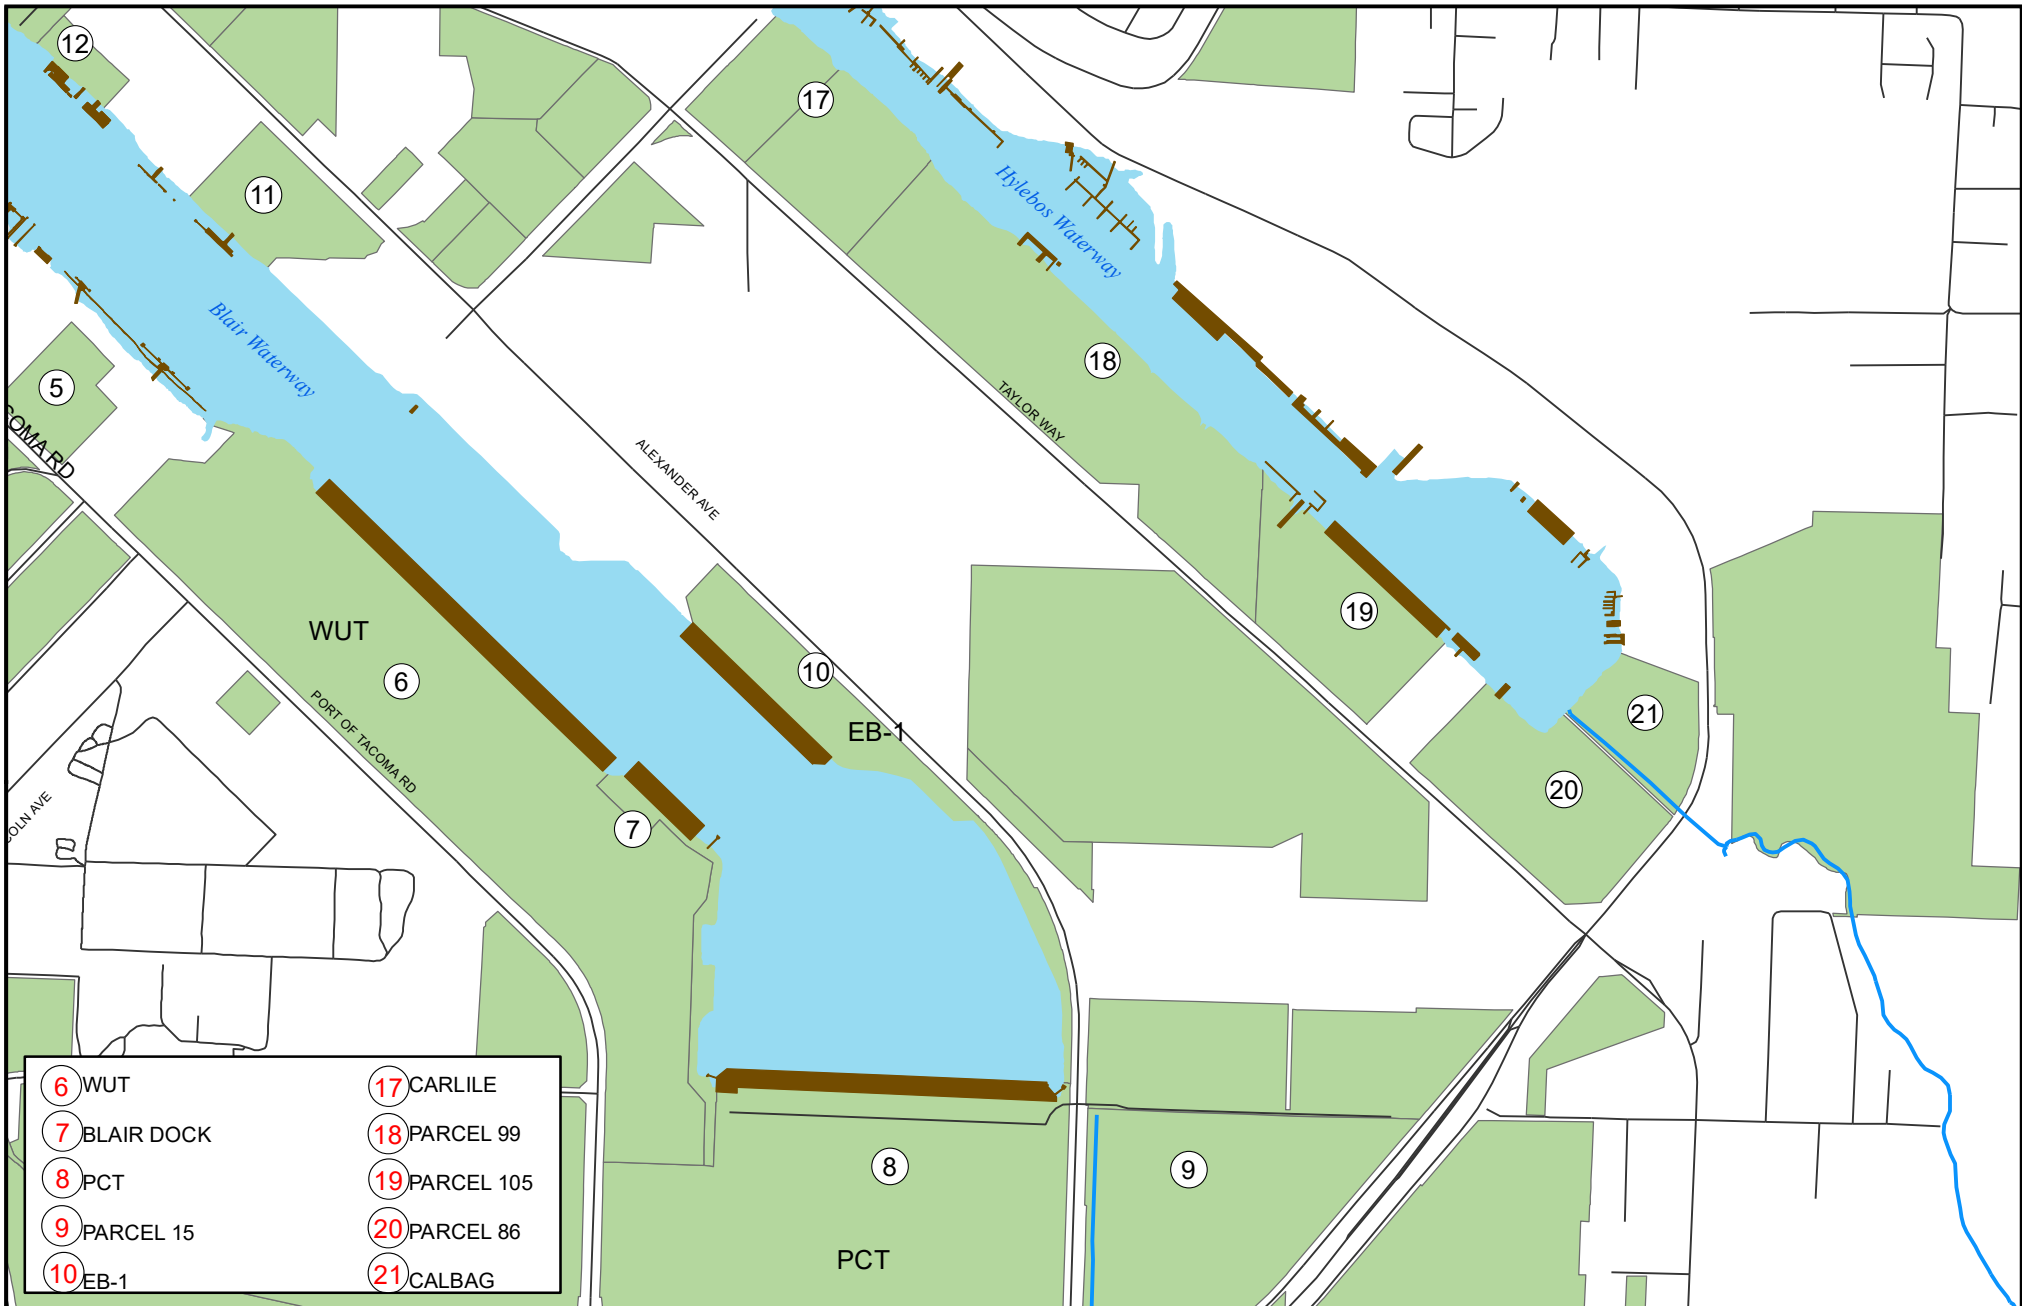

**FIGURE 04**

**REFERENCE #: NWS-2014-1149-WRD**


**APPLICANT NAME: Port of Tacoma**

**PROJECT: Programmatic Port-wide Maintenance**

**LOCATION: Tacoma, WA**


**SHEET 4 of 6**

**DATE: 2/11/2020**



**DISCLAIMER:** The information included on this map has been compiled by Port of Tacoma staff from a variety of sources and is subject to change without notice. These data are intended for informational purposes and should not be considered authoritative for engineering, navigational, legal and other site-specific uses. The Port of Tacoma makes no representations or warranties, express or implied, as to accuracy, completeness, timeliness, or rights to the use of such information.

Author: Jenn Stebbings

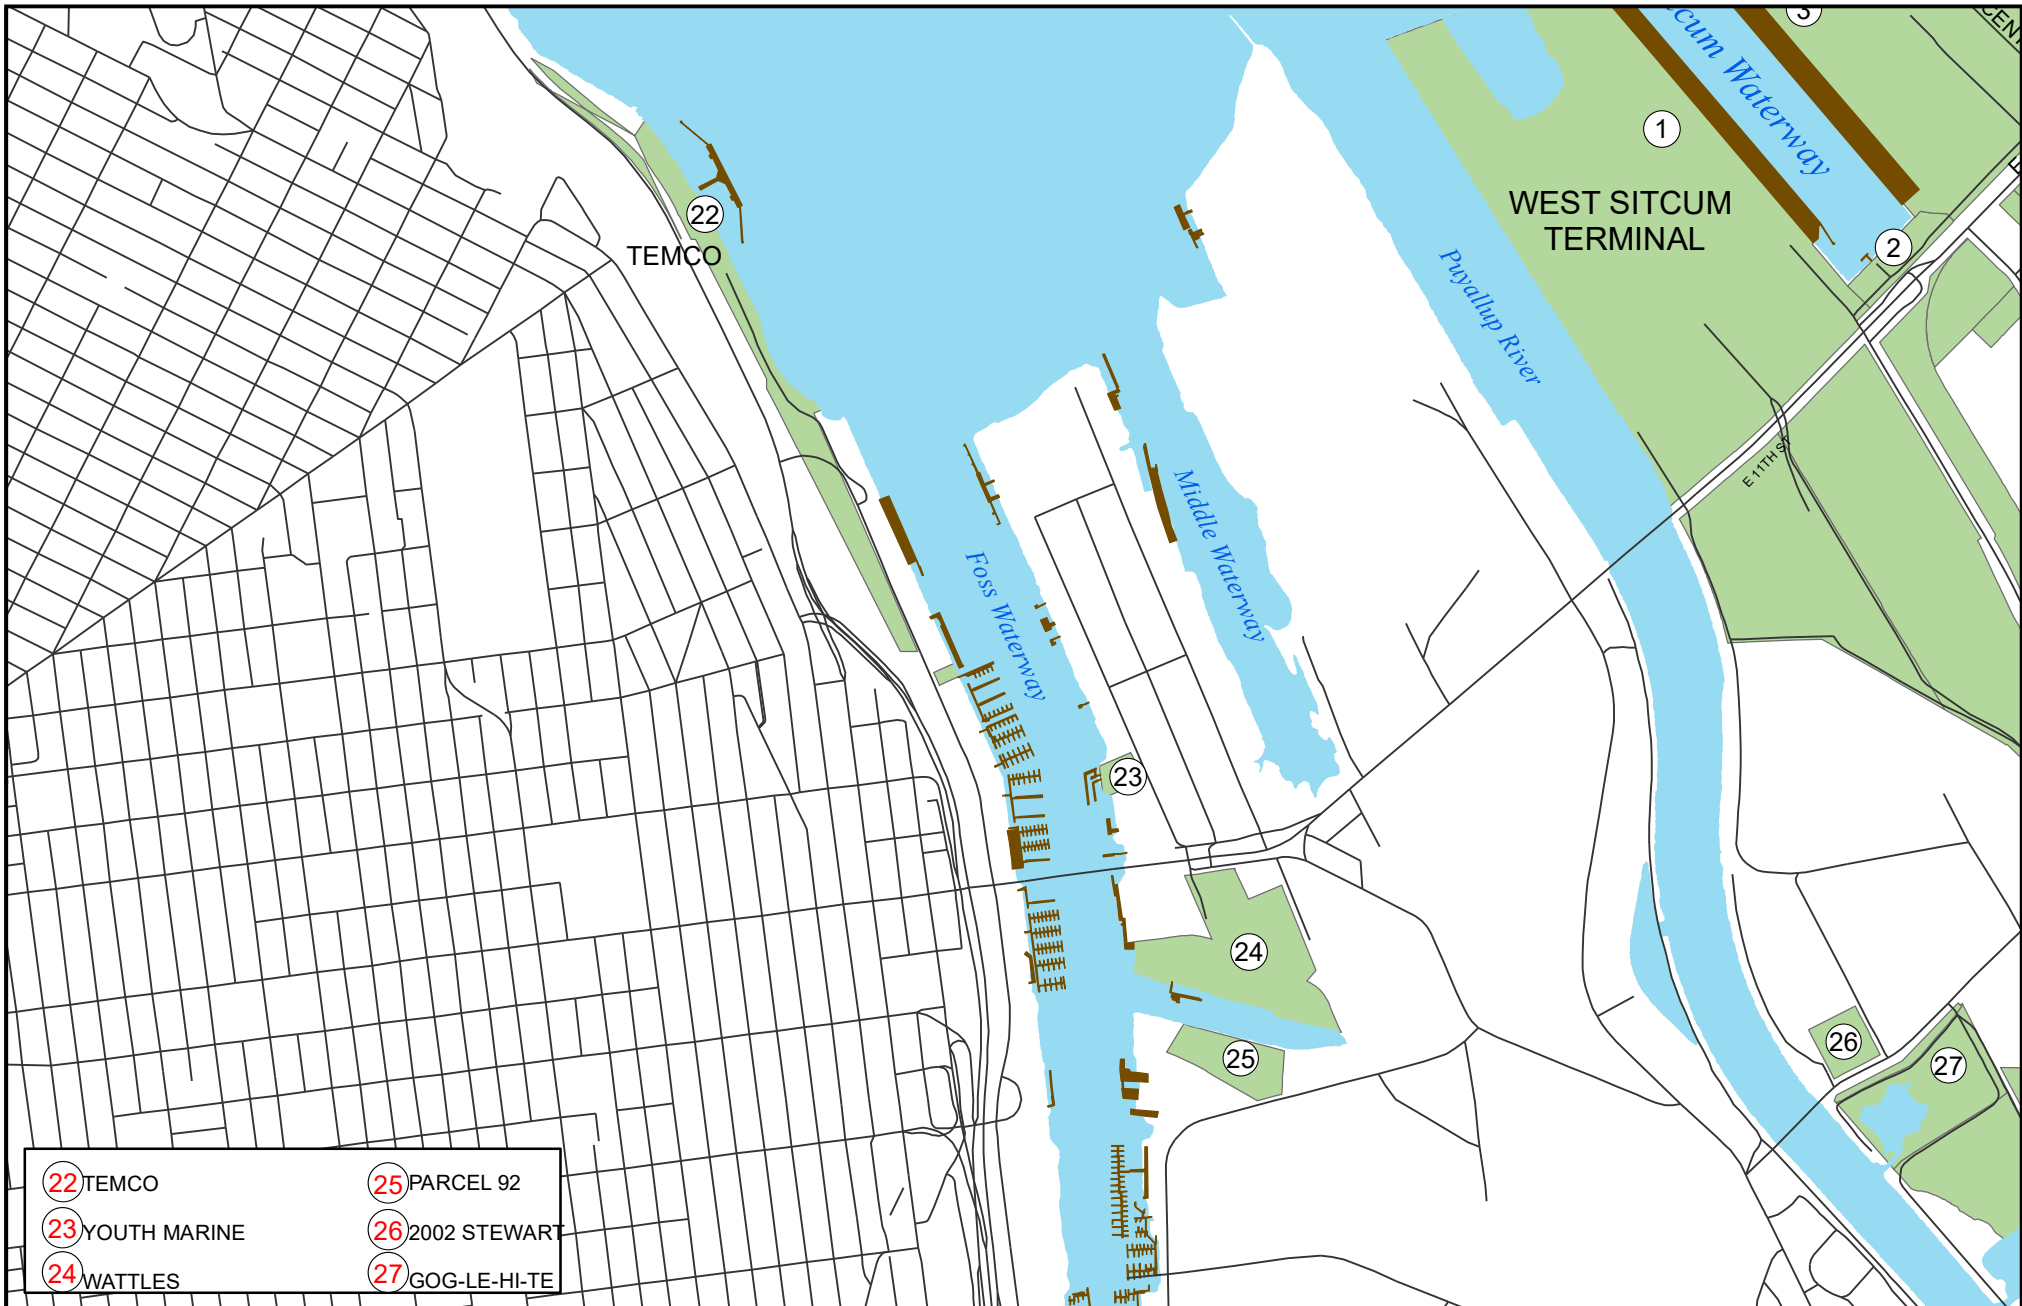

**FIGURE 05**

**REFERENCE #: NWS-2014-1149-WRD**

**APPLICANT NAME: Port of Tacoma**


**PROJECT: Programmatic Port-wide Maintenance**

**LOCATION: Tacoma, WA**

**SHEET 5 of 6**

**DATE: 2/11/2020**

0 500 1,000  
Feet



- Creek
- Roads
- Piers
- Waterways
- PortParcels

**DISCLAIMER:** The information included on this map has been compiled by Port of Tacoma staff from a variety of sources and is subject to change without notice. These data are intended for informational purposes and should not be considered authoritative for engineering, navigational, legal and other site-specific uses. The Port of Tacoma makes no representations or warranties, express or implied, as to accuracy, completeness, timeliness, or rights to the use of such information.

Author: Jenn Stebbings







## FIGURE 06

REFERENCE #: NWS-2014-1149-WRD

APPLICANT NAME: Port of Tacoma


PROJECT: Programmatic Port-wide Maintenance

LOCATION: Tacoma, WA

SHEET 6 of 6

DATE: 2/11/2020

0 500 1,000  
Feet



- Piers
- PortParcels
- Creek
- Roads
- Waterways
- PortParcels


**DISCLAIMER:** The information included on this map has been compiled by Port of Tacoma staff from a variety of sources and is subject to change without notice. These data are intended for informational purposes and should not be considered authoritative for engineering, navigational, legal and other site-specific uses. The Port of Tacoma makes no representations or warranties, express or implied, as to accuracy, completeness, timeliness, or rights to the use of such information.

Author: Jenn Stebbings




MATCH LINE - SEE SHEET C1.1

MATCH LINE - SEE SHEET C1.5

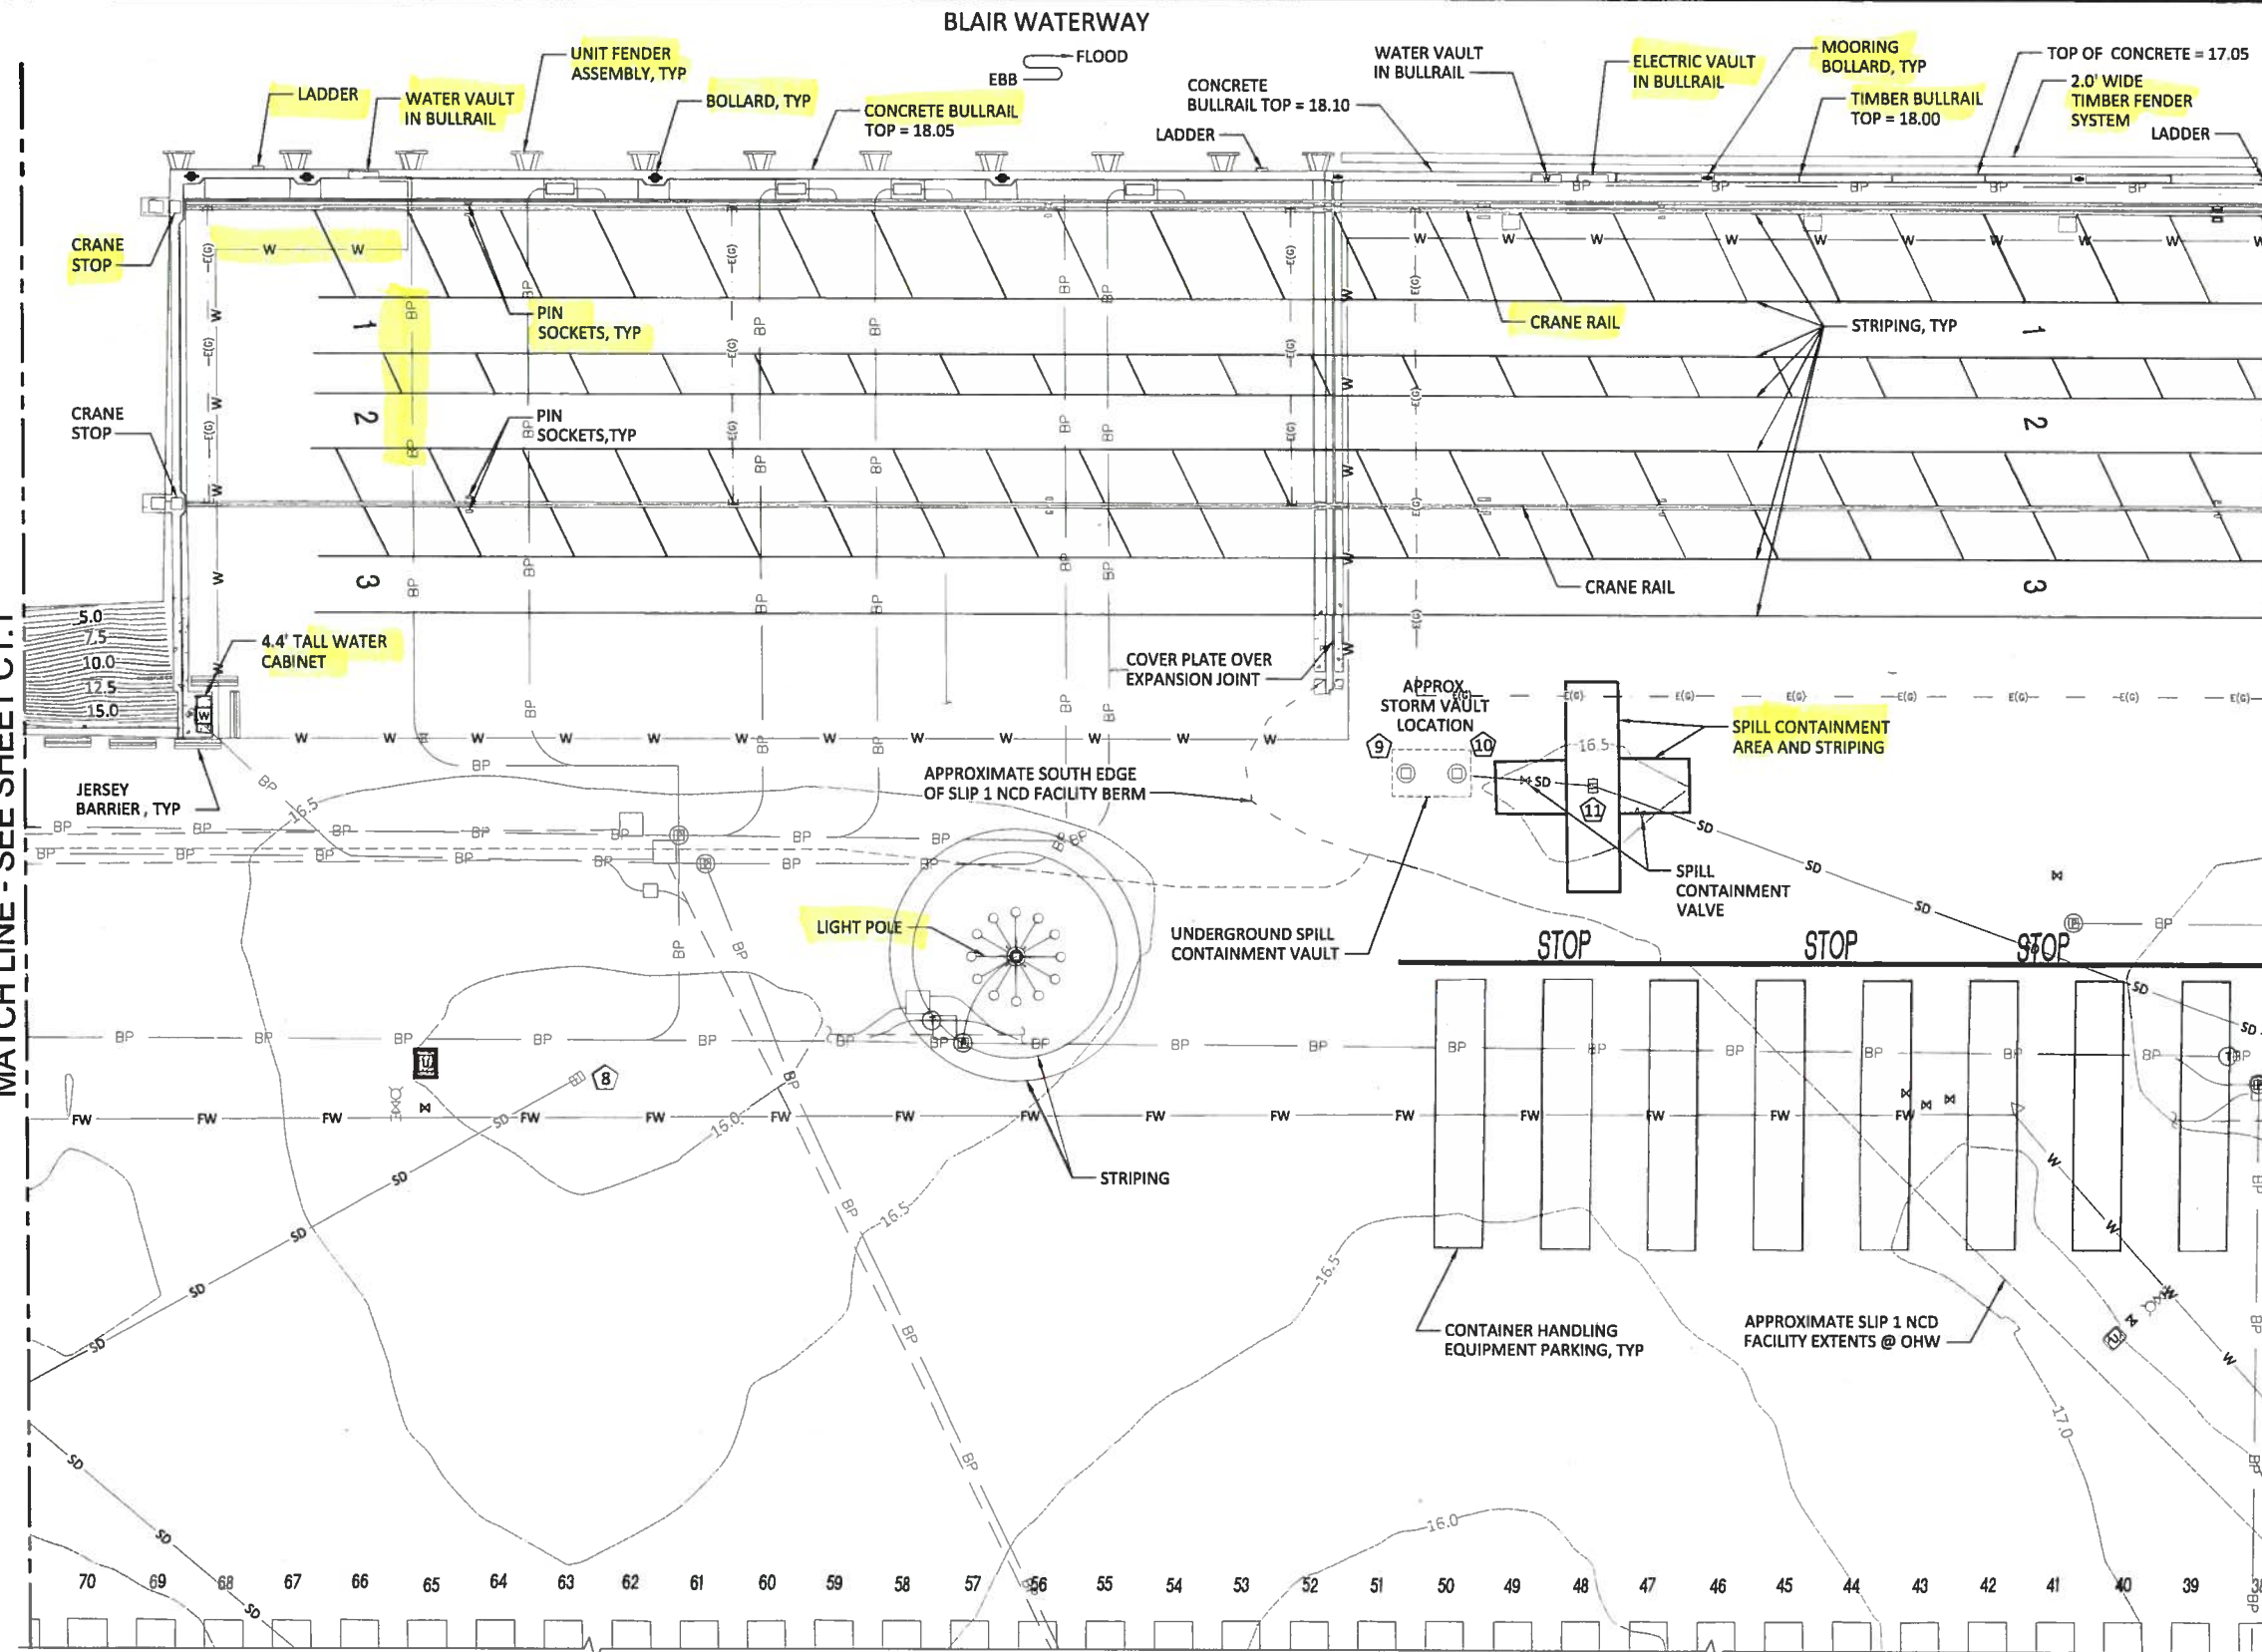


LEGEND

- PROJECT CONTROL POINT
- MOORING BOLLARD
- STORMWATER MANHOLE
- STORMWATER CATCH BASIN
- STORMWATER YARD DRAIN
- STORMWATER CULVERT
- SANITARY SEWER MANHOLE
- SANITARY SEWER CLEANOUT
- WATER VAULT
- WATER METER
- WATER VALVE
- FIRE HYDRANT
- IRRIGATION CONTROL VALVE
- UTILITY POLE
- LIGHT POLE
- POWER MANHOLE
- POWER VAULT
- PAD MOUNTED TRANSFORMER
- POWER JUNCTION BOX
- POWER PANEL
- TELEPHONE/COMM MANHOLE
- TELEPHONE/COMM VAULT
- UNKNOWN UTILITY VAULT
- CAMERA SENSOR POLE
- SIGN
- PIPE BOLLARD
- CONCRETE
- STORMWATER DRAIN LINE
- SANITARY SEWER LINE
- WATER LINE
- FIRE WATER LINE
- ELECTRIC LINE
- COMMUNICATIONS LINE
- ELECTRICAL GROUND
- CHAIN LINK FENCE
- MAJOR CONTOUR
- MINOR CONTOUR
- SPOT ELEVATION
- STORM STRUCTURE IDENTIFICATION NUMBER
- STRIPING ON ASPHALT

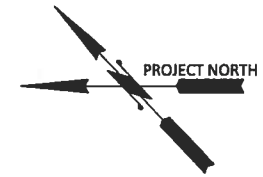

**Terminal and Shoreline Area  
Maintenance and Repair. Highlighted  
items are examples of what activities  
are included in the permit application.**

1 PLAN - EXISTING CONDITIONS  
SCALE: 1" = 20'

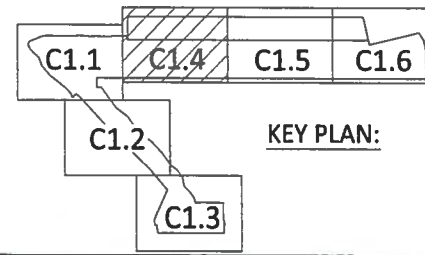

<b>BergerABAM</b> 33301 9th Avenue South, Suite 300 Federal Way, Washington 98003-2900 (206) 431-2300 Fax: (206) 431-2250		DATE: _____ APPR: _____ BY: _____	
<b>Port of Tacoma</b> P.O. BOX 187 TACOMA, WA 98402-0187 (206) 461-3441		MARK: _____ REVISION: _____ 6/7/13	
APPROVED: DC	CSB 6/7/13 JRG	CHECKED BY: _____ DATE: 6/7/13	DATE: 6/7/13
DIR OF ENG: _____ DATE: 6/7/13 PRINTED BY: Jason.mendenhall PORT ADDRESS: ONE SITCUM WAY TACOMA, WA 98421-2300	RANGE: 3 E SECTION: 27 TOWNSHIP: 21 N DAT-HRZ: NAD 83-07 PARCEL: 27	DRAWING SCALE: AS SHOWN	AS SHOWN

**Port of Tacoma**  
**WUT Admin & Marine Building Roof Project**

---

**Appendix D**  
**Phase 1 Construction Restart**  
**COVID-19 Job Site Requirements**

# Phase 1 Construction Restart

## COVID-19 Job Site Requirements

### **Phase 1: Low-risk construction work resumes.**

***Any existing construction projects complying with the points below may resume only those work activities that do not require workers to be closer than six-feet together. If a work activity requires workers to be closer than six-feet, it is not considered low-risk and is not authorized. Adherence to the physical distancing requirement and the health and safety points below will be strictly enforced.***

Prior to recommencing work all contractors are required to develop and post at each job site a comprehensive COVID-19 exposure control, mitigation, and recovery plan. The plan must include policies regarding the following control measures: PPE utilization; on-site social distancing; hygiene; sanitation; symptom monitoring; incident reporting; site decontamination procedures; COVID-19 safety training; exposure response procedures; and a post-exposure incident project wide recovery plan. A copy of the plan must be available on each job site during any construction activities and available for inspection by state and local authorities. Failure to meet posting requirements will result in sanctions, including the job being shut down.

All Contractors are required to post at each job site written notice to employees, subcontractors and government officials the Phase 1 work that will be performed at that job site and signed commitment to adhere to the requirements listed in this document.

All contractors have a general obligation to keep a safe and healthy worksite in accordance with state and federal law. Failure to follow these requirements will be considered a violation of these duties and be penalized accordingly. Under RCW 49.17.060, “each employer shall furnish to each of their employees a place of employment free from recognized hazards that are causing or likely to cause serious injury or death to his or her employees and shall comply with the rules, regulations, and orders promulgated under this chapter.” The Washington State Department of Labor & Industries’ Division of Occupational Safety and Health (DOSH) is responsible for workplace safety and health, including inspections and enforcement, consultation, technical assistance, training, education and grants.

All contractors are also required to comply with the following COVID-19 worksite-specific safety practices, as outlined in Gov. Jay Inslee’s “Stay Home, Stay Healthy” Proclamation 20-25, and in accordance with the Washington State Department of Labor & Industries General Coronavirus Prevention Under Stay Home-Stay Healthy Order (DOSH Directive 1.70: <https://www.lni.wa.gov/safety-health/safety-rules/enforcement-policies/DD170.pdf>) and the Washington State Department of Health Workplace and Employer Resources & Recommendations at <https://www.doh.wa.gov/Coronavirus/workplace>:

### **COVID-19 Site Supervisor**

1. A site-specific COVID-19 Supervisor shall be designated by the contractor at every job site to monitor the health of employees and enforce the COVID-19 job site safety plan. A designated COVID-19 Supervisor must be present at all times during construction activities, except on single-family residential job sites with 6 or fewer people on the site.

### **COVID-19 Safety Training**

2. A Safety Stand-Down/toolbox talk/tailgate training must be conducted on all job sites on the first day of returning to work, and weekly thereafter, to explain the protective measures in place for all workers. Social distancing must be maintained at all gatherings.
3. Attendance will be communicated verbally and the trainer will sign in each attendee.
4. COVID-19 safety requirements shall be visibly posted on each jobsite.

### **Social Distancing**

5. Social distancing of at least 6 feet of separation must be maintained by every person on the worksite at all times.
6. Gatherings of any size must be precluded by taking breaks and lunch in shifts. Any time two or more persons must meet, ensure minimum 6 feet of separation.
7. Identify “choke points” and “high-risk areas” on job sites where workers typically congregate and control them so social distancing is always maintained.
8. Minimize interactions when picking up or delivering equipment or materials, ensure minimum 6-foot separation.
9. To the extent practical allow only one trade/subcontractor at a time on a jobsite and maintain 6-foot separation social distancing for each member of that trade. If more than one trade/subcontractor must be on the job to complete the job then at a minimum all trades and subcontractors must maintain social distancing policies in accordance with this guidance.

### **Personal Protective Equipment (PPE) – Employer Provided**

10. Provide personal protective equipment (PPE) such as gloves, goggles, face shields and face masks as appropriate, or required, for the activity being performed.
11. Masks, in accordance with Washington Department of Health guidelines, or as required by Washington Department of Labor & Industries (L&I) safety rules, must be worn at all times by every employee on the worksite.
12. Eye protection must be worn at all times by every employee while on worksite.
13. Gloves must be worn at all times by every employee while on worksite. The type of glove worn should be appropriate to the task. If gloves are not typically required for the task, then any type of glove is acceptable, including latex gloves.
14. If appropriate PPE cannot be provided, the worksite must be shut down.

## **Sanitation and Cleanliness**

15. Soap and running water shall be abundantly provided on all job sites for frequent handwashing. Workers should be encouraged to leave their workstations to wash their hands regularly, before and after going to the bathroom, before and after eating and after coughing, sneezing or blowing their nose.
16. When running water is not available, portable washing stations, with soap, are required, per WAC 296-155-140 2(a) – (f). Alcohol-based hand sanitizers with greater than 60% ethanol or 70% isopropanol can also be used, but are not a replacement for the water requirement.
17. Post, in areas visible to all workers, required hygienic practices, including not to touch face with unwashed hands or with gloves; washing hands often with soap and water for at least 20 seconds; use hand sanitizer with at least 60% alcohol; cleaning and disinfecting frequently touched objects and surfaces such as workstations, keyboards, telephones, handrails, machines, shared tools, elevator control buttons, and doorknobs; covering the mouth and nose when coughing or sneezing as well as other hygienic recommendations by the U.S. Centers for Disease Control (CDC).
18. Make disinfectants available to workers throughout the worksite and ensure cleaning supplies are frequently replenished.
19. Frequently clean and disinfect high-touch surfaces on job sites and in offices, such as shared tools, machines, vehicles and other equipment, handrails, doorknobs, and portable toilets. If these areas cannot be cleaned and disinfected frequently, the jobsite shall be shut down until such measures can be achieved and maintained.
20. When the worksite is an occupied home, workers should sanitize work areas upon arrival, throughout the workday and immediately before they leave, and occupants should keep a personal distance of at least 10 feet.
21. If an employee reports feeling sick and goes home, the area where that person worked should be immediately disinfected.

## **Employee Health/Symptoms**

22. Create policies which encourage workers to stay home or leave the worksite when feeling sick or when they have been in close contact with a confirmed positive case. If they develop symptoms of acute respiratory illness, they must seek medical attention and inform their employer.
23. Have employees inform their supervisors if they have a sick family member at home with COVID-19. If an employee has a family member sick with COVID-19, that employee must follow the isolation/quarantine requirements as established by the State Department of Health.
24. Screen all workers at the beginning of their shift by taking their temperature and asking them if they have a fever, cough, shortness of breath, fatigue, muscle aches, or new loss of taste or smell. Thermometers used shall be 'no touch' or 'no contact' to the greatest extent possible. If a 'no touch' or 'no contact' thermometer is not available, the thermometer must be properly sanitized between each use. Any worker with a temperature of 100.4°F or higher is considered to have a fever and must be sent home.



25. Instruct workers to report to their supervisor if they develop symptoms of COVID-19 (e.g., fever, cough, shortness of breath, fatigue, muscle aches, or new loss of taste or smell). If symptoms develop during a shift, the worker should be immediately sent home. If symptoms develop while the worker is not working, the worker should not return to work until they have been evaluated by a healthcare provider.
26. Failure of employees to comply will result in employees being sent home during the emergency actions.
27. Employees who do not believe it is safe to work shall be allowed to remove themselves from the worksite and employers must follow the expanded family and medical leave requirements included in the Families First Coronavirus Response Act or allow the worker to use unemployment benefits, paid time off, or any other available form of paid leave available to the worker at the workers discretion.
28. Any worker coming to work on a construction site in Washington from any state that is not contiguous to Washington must self-quarantine for 14 days to become eligible to work on a job site in Washington.
29. If an employee is confirmed to have COVID-19 infection, employers should inform fellow employees of their possible exposure to COVID-19 in the workplace but maintain confidentiality as required by the Americans with Disabilities Act (ADA). The employer should instruct fellow employees about how to proceed based on the CDC [Public Health Recommendations for Community-Related Exposure](#).

#### **Job Site Visitors**

30. A daily attendance log of all workers and visitors must be kept and retained for at least four weeks. The log must include the name, phone number, and email address of all workers and visitors.

**No jobsite may operate until the contractor can meet and maintain all requirements, including providing materials, schedules and equipment required to comply.**

These Phase 1 COVID-19 job site safety practices are required as long as the “Stay Home, Stay Healthy” Gubernatorial Proclamation 20-25 is in effect or if adopted as rules by a federal, state or local regulatory agency. **All items minus numbers 28 and 30 are subject to enforcement action under L&I’s Division of Occupational Safety and Health (DOSH).**

**Workplace safety and health complaints** may be submitted to the L&I Call Center: (1-800-423-7233) or via e-mail to [adag235@lni.wa.gov](mailto:adag235@lni.wa.gov). **General questions about how to comply with construction safety practices** can be submitted to the state’s Business Response Center at <https://app.smartsheet.com/b/form/2562f1caf5814c46a6bf163762263aa5>. **All other violations related to Proclamation 20-25** can be submitted via at: <https://bit.ly/covid-compliance>.