

QDD-100GB-DCO-ZRP-J-C

Juniper Networks® Compatible TAA 100GBase-ZR+ Coherent QSFP-DD Transceiver (SMF, 1528.77nm to 1567.13nm, Open ZR+, LC, DOM)

Features:

- QSFP-DD MSA compliant
- Hot pluggable QSFP-DD footprint (Type 2A)
- Supports 100Gbps Payload (Open ZR+)
- Duplex LC Connector
- Tunable C-band Transmitter and Coherent Receivers
- O-FEC (15%) with 11.6dB Net Coding Gain
- 100GAUI-2 (2x 26.5625GBd PAM4) Serial Electrical Interface, RS-FEC (544/514)
- CAUI-4 (4x 25.78125Gbps NRZ) Serial Electrical Interface, RS-FEC (544/528)/No FEC
- Operating Temperature 0 to 70 Celsius
- RoHS Compliant and Lead-free



Applications:

- 100GBase Ethernet
- Access and Enterprise

Product Description

This Juniper Networks® compatible QSFP-DD transceiver provides 100GBase-ZR+ Open ZR+ throughput over single-mode fiber (SMF) using a wavelength of 1528.77nm to 1567.13nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Juniper Networks®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|------------------------------------|--------|-------|---------|-------|------|-------|
| Power Supply Voltage | Vcc | 3.218 | 3.3 | 3.465 | V | |
| Storage Temperature | Tstg | -40 | | 85 | °C | |
| Case Operating Temperature | Tc | 0 | | 70 | °C | |
| Relative Humidity (Non-Condensing) | RH | | | 85 | % | |
| Optical Receiver Overload | | | | 4 | dBm | 1 |
| Supported Host Signal Types | | | 103.125 | | Gbps | 2 |
| Line Baud Rate | | | 30.07 | | GBd | 3 |

Notes:

1. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers before ensuring that proper optical attenuation is used.
2. As per IEEE 802.3-2012.
3. 100G DP-QPSK, O-FEC.

Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|----------------------|--------|-------|------|-------|------|-------|
| Power Supply Voltage | Vcc | 3.218 | 3.3 | 3.465 | V | |
| Power Supply Current | Icc | | | 6 | A | |
| Power Consumption | PD | | | 16.5 | W | |
| Power Consumption | PD | | | 1.5 | W | 1 |

Notes:

1. Low-power mode.

Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|-------------------------------------|------------|------------------|-------------|------------------|----------|-------|
| Transmitter | | | | | | |
| Average Output Power | P_o | -6 | -4.5 | -2 | dBm | 1, 2 |
| Laser Linewidth | | | | 300 | kHz | |
| Transmitter VOA Dynamic Range | | 10 | | | dB | 3 |
| Output Power Stability | | -1 | | 1 | dB | |
| In-Band OSNR | | 35 | | | dB/0.1nm | |
| Out-of-Band OSNR | | 35 | | | dB/0.1nm | |
| Frequency Range | | 191.275 | | 196.125 | THz | 4 |
| Centre Frequency | | $\nu_T - 1.5$ | ν_T | $\nu_T + 1.5$ | GHz | 5 |
| Channel Spacing | | 6.25 | | | GHz | |
| Centre Wavelength Range | $T\lambda$ | 1528.58 | | 1567.34 | nm | |
| Centre Wavelength | $T\lambda$ | $\lambda_T - 15$ | λ_T | $\lambda_T + 15$ | pm | |
| Receiver | | | | | | |
| Receiver Operating Wavelength | $R\lambda$ | 1528.58 | | 1567.34 | nm | |
| Receiver Sensitivity | S | | | -32 | dBm | 6 |
| Receiver Overload | P_{OL} | 4 | | | dBm | 7 |
| Receiver Input Power Range | | -20 | | 4 | dBm | 8 |
| Extended Receiver Input Power Range | | -25 | | 4 | dBm | 9 |
| Acquisition Range | | -3.6 | | 3.6 | GHz | 10 |
| Upstream Tx Linewidth | | | | 1000 | kHz | |
| OSNR Tolerance | | | 14 | 15.5 | dB | 11 |
| Crosstalk Tolerance | | | | 17 | dB | 12 |
| Chromatic Dispersion Tolerance | | | | 5000 | ps/nm | 13 |

Notes:

1. Output power coupled into a 9/125 μ m single-mode fiber.
2. The output power is adjustable in steps of 0.1dB within the specified wavelength range.
3. With Tx VOA attenuation is set to minimum.
4. Per ITU-T G.694.1 DWDM grid definition.
5. Applies also to LO.
6. Minimum input power needed to achieve post-FEC BER $\leq 10^{-15}$, 100G DP-QPSK, and OSNR > 35 dB.
7. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers before ensuring that proper optical attenuation is used.
8. An input power in this range guarantees optimum OSNR performance.
9. With ≤ 1 dB OSNR tolerance degradation.
10. Frequency offset between received carrier and LO.
11. At optimum input power range.


12. Ratio of accumulated crosstalk channels to signal power.
13. Less than 0.5dB receiver sensitivity penalty compared to OSNR>35dB.

Pin Descriptions

| Pin | Logic | Symbol | Name/Description | Plug Sequence |
|-----|-------------|----------|--|---------------|
| 1 | | GND | Module Ground. | 1B |
| 2 | CML-I | Tx2- | Transmitter Inverted Data Input. | 3B |
| 3 | CML-I | Tx2+ | Transmitter Non-Inverted Data Input. | 3B |
| 4 | | GND | Module Ground. | 1B |
| 5 | CML-I | Tx4- | Transmitter Inverted Data Input. | 3B |
| 6 | CML-I | Tx4+ | Transmitter Non-Inverted Data Input. | 3B |
| 7 | | GND | Module Ground. | 1B |
| 8 | LVTTL-I | ModSelL | Module Select. | 3B |
| 9 | LVTTL-I | ResetL | Module Reset. | 3B |
| 10 | | VccRx | +3.3V Receiver Power Supply. | 2B |
| 11 | LVC MOS-I/O | SCL | 2-Wire Serial Interface Clock. | 3B |
| 12 | LVC MOS-I/O | SDA | 2-Wire Serial Interface Data. | 3B |
| 13 | | GND | Module Ground. | 1B |
| 14 | CML-O | Rx3+ | Receiver Non-Inverted Data Output. | 3B |
| 15 | CML-O | Rx3- | Receiver Inverted Data Output. | 3B |
| 16 | | GND | Module Ground. | 1B |
| 17 | CML-O | Rx1+ | Receiver Non-Inverted Data Output. | 3B |
| 18 | CML-O | Rx1- | Receiver Inverted Data Output. | 3B |
| 19 | | GND | Module Ground. | 1B |
| 20 | | GND | Module Ground. | 1B |
| 21 | CML-O | Rx2- | Receiver Inverted Data Output. | 3B |
| 22 | CML-O | Rx2+ | Receiver Non-Inverted Data Output. | 3B |
| 23 | | GND | Module Ground. | 1B |
| 24 | CML-O | Rx4- | Receiver Inverted Data Output. | 3B |
| 25 | CML-O | Rx4+ | Receiver Non-Inverted Data Output. | 3B |
| 26 | | GND | Module Ground. | 1B |
| 27 | LVTTL-O | ModPrsL | Module Present. | 3B |
| 28 | LVTTL-O | IntL | Interrupt. | 3B |
| 29 | | VccTx | +3.3V Transmitter Power Supply. | 2B |
| 30 | | Vcc1 | +3.3V Power Supply. | 2B |
| 31 | LVTTL-I | InitMode | Initialization Mode. In legacy QSFP applications, the InitMode pad is called LPMode. | 3B |
| 32 | | GND | Module Ground. | 1B |
| 33 | CML-I | Tx3+ | Transmitter Non-Inverted Data Input. | 3B |
| 34 | CML-I | Tx3- | Transmitter Inverted Data Input. | 3B |
| 35 | | GND | Module Ground. | 1B |
| 36 | CML-I | Tx1+ | Transmitter Non-Inverted Data Input. | 3B |


| | | | | |
|----|-------|----------|--------------------------------------|----|
| 37 | CML-I | Tx1- | Transmitter Inverted Data Input. | 3B |
| 38 | | GND | Module Ground. | 1B |
| 39 | | GND | Module Ground. | 1A |
| 40 | CML-I | Tx6- | Transmitter Inverted Data Input. | 3A |
| 41 | CML-I | Tx6+ | Transmitter Non-Inverted Data Input. | 3A |
| 42 | | GND | Module Ground. | 1A |
| 43 | CML-I | Tx8- | Transmitter Inverted Data Input. | 3A |
| 44 | CML-I | Tx8+ | Transmitter Non-Inverted Data Input. | 3A |
| 45 | | GND | Module Ground. | 1A |
| 46 | | Reserved | For Future Use. | 3A |
| 47 | | VS1 | Module Vendor-Specific 1. | 3A |
| 48 | | VccRx1 | +3.3V Receiver Power Supply. | 2A |
| 49 | | VS2 | Module Vendor-Specific 2. | 3A |
| 50 | | VS3 | Module Vendor-Specific 3. | 3A |
| 51 | | GND | Module Ground. | 1A |
| 52 | CML-O | Rx7+ | Receiver Non-Inverted Data Output. | 3A |
| 53 | CML-O | Rx7- | Receiver Inverted Data Output. | 3A |
| 54 | | GND | Module Ground. | 1A |
| 55 | CML-O | Rx5+ | Receiver Non-Inverted Data Output. | 3A |
| 56 | CML-O | Rx5- | Receiver Inverted Data Output. | 3A |
| 57 | | GND | Module Ground. | 1A |
| 58 | | GND | Module Ground. | 1A |
| 59 | CML-O | Rx6- | Receiver Inverted Data Output. | 3A |
| 60 | CML-O | Rx6+ | Receiver Non-Inverted Data Output. | 3A |
| 61 | | GND | Module Ground. | 1A |
| 62 | CML-O | Rx8- | Receiver Inverted Data Output. | 3A |
| 63 | CML-O | Rx8+ | Receiver Non-Inverted Data Output. | 3A |
| 67 | | GND | Module Ground. | 1A |
| 68 | | NC | Not Connected. | 3A |
| 69 | | Reserved | For Future Use. | 3A |
| 70 | | VccTx1 | +3.3V Transmitter Power Supply. | 2A |
| 71 | | Vcc2 | +3.3V Power Supply. | 2A |
| 72 | | Reserved | For Future Use. | 3A |
| 73 | | GND | Module Ground. | 1A |
| 74 | CML-I | Tx7+ | Transmitter Non-Inverted Data Input. | 3A |
| 75 | CML-I | Tx7- | Transmitter Inverted Data Input. | 3A |
| 76 | | GND | Module Ground. | 1A |

Electrical Pad Layout

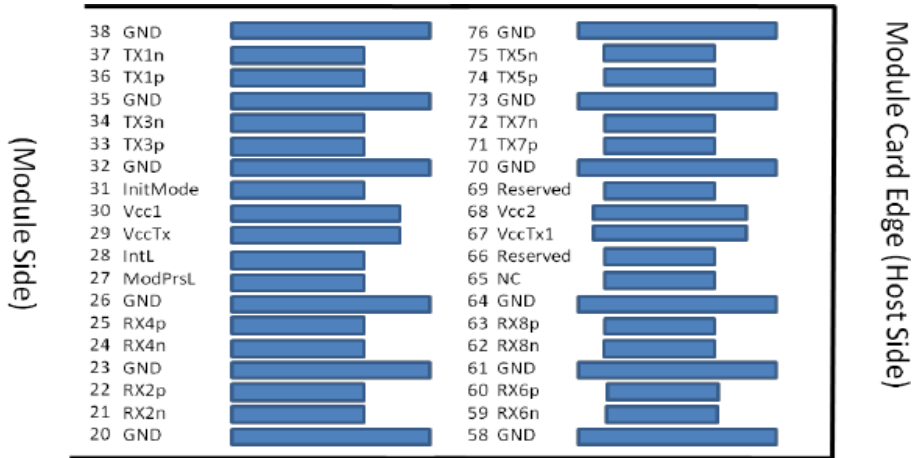

Top side viewed from top


Legacy QSFP28 Pads Additional QSFP-DD Pads

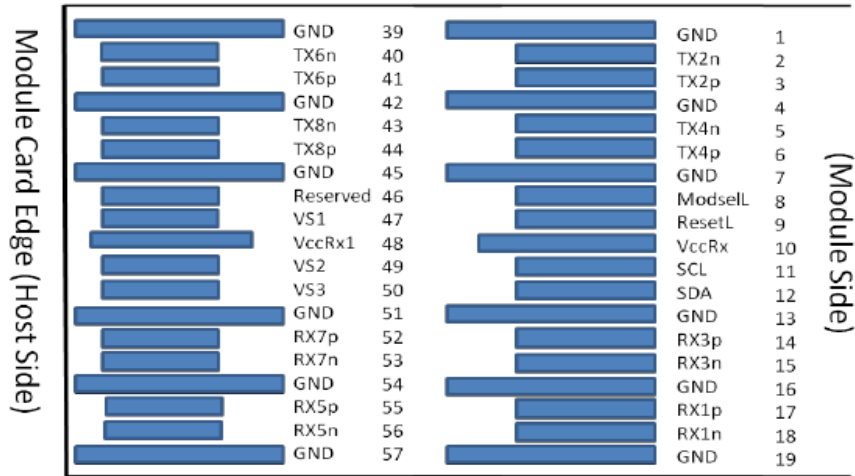


Bottom side viewed from bottom

Additional QSFP-DD Pads Legacy QSFP28 Pads

Recommended Power Supply Filter

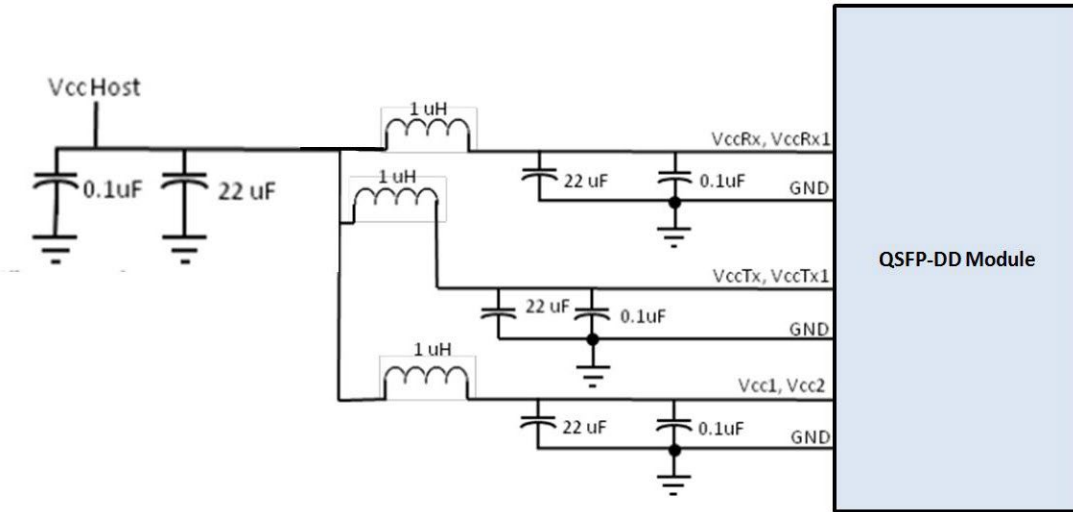

Mechanical Specifications

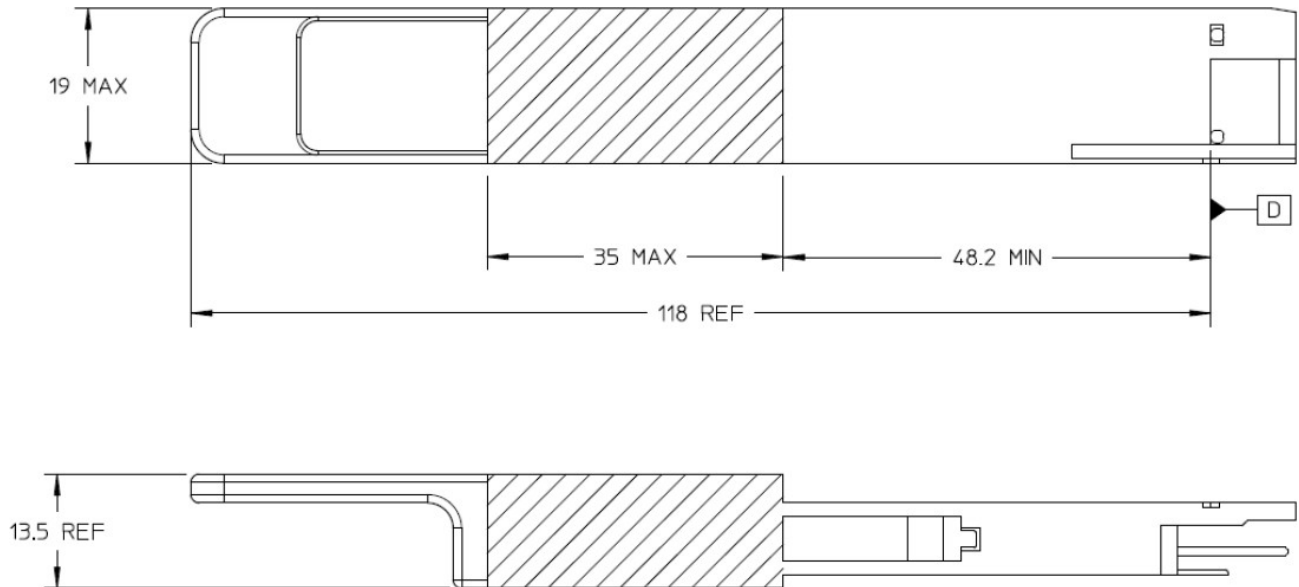

About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com

Telephone: +44 1285 719 600