

PG NYLON CORD GRIPS WITH STRAIN RELIEF

Material: PA (NYLON), UL 94

Hermetic seal: NBR

Working temperature: -40°C to 100°C in static state
Instantaneous heat resistance up to 120°C
-20°C to 80°C in dynamic state
Instantaneous heat resistance up to 100°C

Colour: Grey, Black



RoHS

CE IP68 TÜV IP69K
PRODUCT SERVICE

UL US
LISTED
E360400

UL US
UL FILE NO.: E360400

UL F1
In Black colour only

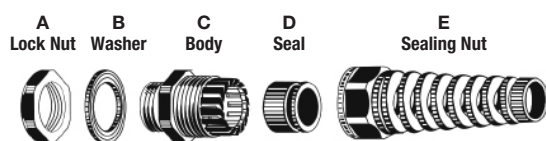

Techspan Part No. Black	Techspan Part No. Grey††	AG	Inch	H		GL		d		mm		Package Qty.
				mm	inch	mm	inch	mm	inch	mm	inch	
RFC07AA*	RFC07AA-GR*	PG 7	.11 - .26	54	2.126	15	.591	7	.276	15	.591	100
RFC07AR*	RFC07AR-GR*	PG 7	.07 - .20	54	2.126	15	.591	7	.276	15	.591	100
RFC09AA*	RFC09AA-GR*	PG 9	.15 - .32	63	2.480	15	.591	8,5	.334	19	.748	100
RFC09AR*	RFC09AR-GR*	PG 9	.07 - .24	63	2.480	15	.591	8,5	.334	19	.748	100
RFC11AA*	RFC11AA-GR*	PG 11	.19 - .39	78	3.070	15	.591	10,5	.413	22	.866	100
RFC11AR*	RFC11AR-GR*	PG 11	.11 - .28	78	3.070	15	.591	10,5	.413	22	.866	100
RFC13AA	RFC13AA-GR	PG 13,5	.23 - .47	90	3.543	15	.591	13	.512	24	.945	50
RFC13AR	RFC13AR-GR	PG 13,5	.19 - .35	90	3.543	15	.591	13	.512	24	.945	50
RFC16AA	RFC16AA-GR	PG 16	.39 - .56	100	3.937	15	.591	15,5	.610	27	1.063	50
RFC16AR	RFC16AR-GR	PG 16	.27 - .47	100	3.937	15	.591	15,5	.610	27	1.063	50
RFC21AA	RFC21AA-GR	PG 21	.51 - .71	114	4.488	15	.591	20	.787	33	1.299	20
RFC21AR	RFC21AR-GR	PG 21	.35 - .63	114	4.488	15	.591	20	.787	33	1.299	20



†† Grey connectors with Strain Relief are Non-stock Items.