



Nylon Insulated Support Sleeve

Nylon insulated colour coded barrel styles offer the ultimate in high-performance terminal design and construction. Tin-plated brass sleeve strengthens barrel and secures wire to protect against stress and high vibration. Permanently-attached colour-coded Nylon insulating sleeve extends beyond the metal support sleeve. Funnel ferrule wire entrance into electrical barrel eliminates wire strand 'hang-up', increases crimping rates and wire termination reliability. Operating Temperature Range: continuous duty from -67°F to 221°F (-55°C to 105°C).

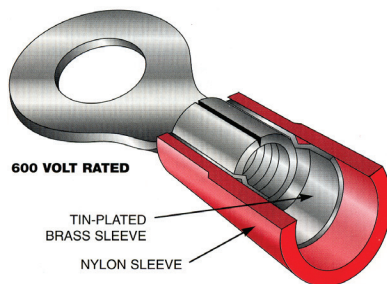

Copper Solid and Stranded Wire Only






For Locking Styles contact Techspan




22-18 WIRE RANGE

.032 Stock

600 Volts

Stud Size	Part Number	Stud Size	Part Number
4-6	 R6A6S	4-6	 BS6A6S
4-6	 R6A6		 Seamless Butt B8A
6-8	 R6A8		
8-10	 R6A10		
12-1/4	 R6A14S		
1/4-5/16	 R6A56S		
5/16-3/8	 R6A38		
4-6	 BS6A6 Block Spade		
8	 BS6A8		
10	 BS6A10		



DIMENSIONAL CHART		
Part Number	W	L
B8A		1.014"
BS6A10	0.301"	0.785"
BS6A6	0.294"	0.896"
BS6A6S	0.253"	0.886"
BS6A8	0.294"	0.907"
R6A14S	0.460"	1.130"
R6A38	0.538"	1.363"
R6A56S	0.460"	1.112"
R6A6	0.311"	0.916"
R6A6S	0.249"	0.902"
R6A8	0.313"	0.972"
R6A8S	0.313"	0.906"

Terminals accept .140" Max. Wire Ins. Dia.; Splices – .120"

Add suffix "M" for 1000 pack

Add suffix "P" for Pro Pack (Quantities vary by Part #)

Approved installation tool: See tool chart pages E-2,3,4

Economy installation tools: RAT-NYL, 453, HTS1000

See pages E-2 to E-4 for installation tools.