




SWIVEL-FLEX ALUMINUM CORD GRIPS

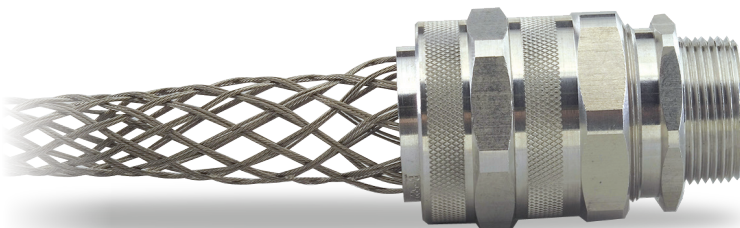

The Tuff-Seal™ SWV Series, or Swivel-Flex Cord Grips feature a patented swivel design that provides superior cable protection. This patent-pending design virtually eliminates premature mesh fatigue while the mesh prevents cable pull-out. And this combination maximizes both cable and connection life so that downtime and costs are greatly reduced.

Machined flats and threads in the cord connector provide a more secure installation with a visually appealing appearance. A special inner gasket made from neoprene provides a seal against rust, filings and other foreign material. And these grips meet or exceed SAE performance requirements.

Swivel-Flex Grips are ideal for use in applications where repetitive movement of control & power cable occurs such as with robots and automated equipment used in material handling and welding. Grips in this series are available in straight, 45° and 90° body styles with knock-out sizes ranging from 1 1/4" diameter to 1 1/2" diameter.

COMPLETE ASSEMBLY PART NUMBERS

SWIVEL-FLEX ALUMINUM CORD GRIPS				
Conduit Size	Cable Range	Straight	45 Degree	90 Degree
1 1/4"	.562 – .688	SWV-411-E	SWV-45411-E	SWV-9411-E
	.688 – .812	SWV-413-E	SWV-45413-E	SWV-9413-E
	.750 – .875	SWV-414-E	SWV-45414-E	SWV-9414-E
	.875 – 1.000	SWV-416-E	SWV-45416-E	SWV-9416-E
	1.000 – 1.125	SWV-418-E	SWV-45418-E	SWV-9418-E
	1.125 – 1.250	SWV-420-E	SWV-45420-E	SWV-9420-E
	1.250 – 1.375	SWV-422-E	SWV-45422-E	SWV-9422-E
1 1/2"	.562 – .688	SWV-511-E	SWV-45511-E	SWV-9511-E
	.688 – .812	SWV-513-E	SWV-45513-E	SWV-9513-E
	.750 – .875	SWV-514-E	SWV-45514-E	SWV-9514-E
	.875 – 1.000	SWV-516-E	SWV-45516-E	SWV-9516-E
	1.000 – 1.125	SWV-518-E	SWV-45518-E	SWV-9518-E
	1.125 – 1.250	SWV-520-E	SWV-45520-E	SWV-9520-E
	1.250 – 1.375	SWV-522-E	SWV-45522-E	SWV-9522-E