

PG TYPE METAL CORD GRIPS

Material: Nickel-plated brass
Fixture pack: PA (NYLON), UL 94
Hermetic seal: NBR
Protection degree: IP68-10 pressure (Rotate position)
Working temperature: -40°C to 100°C in static state
Instantaneous heat resistance up to 120°C



RoHS



IP68



IP69K

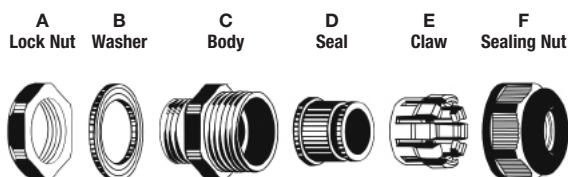

Techspan Part No.	AG	Inch	H		GL		Y		Package Qty.
			mm	inch	mm	inch	mm	inch	
BRC07AA*	PG 7	.11 - .26	19	.748	10	.394	14	.551	100
BRC07AR*	PG 7	.07 - .20	19	.748	10	.394	14	.551	100
BRC09AA*	PG 9	.15 - .32	21	.827	10	.394	17	.669	100
BRC09AR*	PG 9	.07 - .24	21	.827	10	.394	17	.669	100
BRC11AA*	PG 11	.19 - .39	22	.866	10	.394	20	.787	100
BRC11AR*	PG 11	.11 - .28	22	.866	10	.394	20	.787	100
BRC13AA	PG 13,5	.23 - .47	24	.945	10	.394	22	.866	50
BRC13AR	PG 13,5	.19 - .35	24	.945	10	.394	22	.866	50
BRC16AA	PG 16	.39 - .56	23	.906	10	.394	24	.945	50
BRC16AR	PG 16	.27 - .47	23	.906	10	.394	24	.945	50
BRC21AA	PG 21	.51 - .71	24	.945	12	.472	30	1.181	20
BRC21AR	PG 21	.35 - .63	24	.945	12	.472	30	1.181	20
BRC29AA	PG 29	.70 - .98	29	1.142	12	.472	40	1.575	20
BRC29AR	PG 29	.47 - .79	29	1.142	12	.472	40	1.575	20
BRC36AA	PG 36	.87 - 1.26	35	1.378	15	.591	50	1.969	10
BRC36AR	PG 36	.79 - 1.02	35	1.378	15	.591	50	1.969	10

