

Battery Cable Assemblies, Bonding & Ground Straps

Stud Battery Harnesses (Stackable)

Made with 2/0GA Welding Cable. Fits up to 3/8" stud

Side-by-Side

Length	Colour/Polarity	1 PC/PK	10 PCS/PK
8-1/2"	Red (Positive)	767898	767898B
8-1/2"	Black (Negative)	767798	767798B

End-to-End

Length	Colour/Polarity	1 PC/PK	10 PCS/PK
17"	Red (Positive)	767899	767899B
17"	Black (Negative)	767799	767799B




Stud Battery Harness (Stackable)

Stud to Power Harnesses


Made with 2/0GA Battery Cable. Fits up to 3/8" stud. Comes complete with serrated hex flange nuts and 1 charging post

Length	# of Nuts included	Red (Positive)	Black (Negative)
7"	3	767896	767796
14"	4	767897	767797

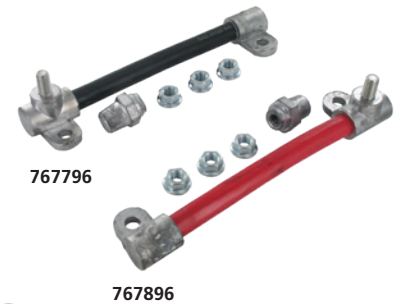

767796

767896

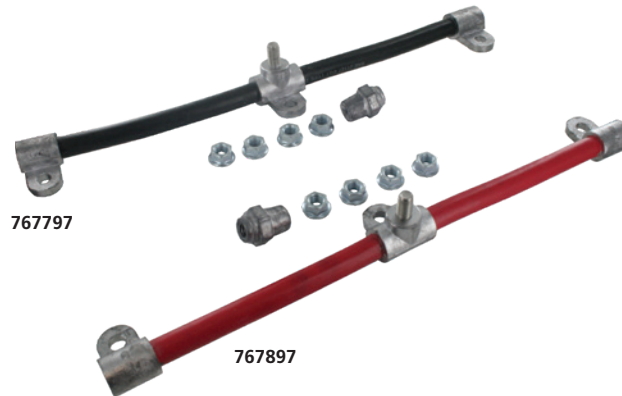

767797

767897


F

Bonding Strap, Tinned Copper Braid

Replaces OE strap and insulated type jumpers between firewall and engine valve cover or block. Grounds charging system to prevent dimming of lights and reduces radio noise by bonding metal parts. Fits most engines.

4GA, 3/8" Holes

769329 14" (355.6mm) long

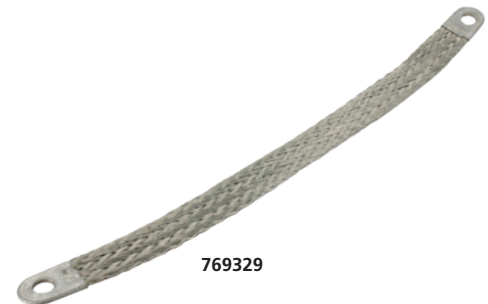

769329

Bonding Strap, Tinned Copper Braid

Fifth Wheel Ground Strap, Tinned Copper Braid

2GA, 3/8" Holes

769330 8" (203.2mm) long

769332 14" (355.6mm) long

2GA, 5/8" Holes

769333 18" (457.2mm) long



Fifth Wheel Ground Strap