

Switches



765007

Push/Pull Switches

Medium-Duty

Positions	Circuitry	Description	Terminal Type	Current Rating	Mounting Stem (Diameter)	Length	Knob	1 PC/PK	25 PCS/PK
2	OFF-ON	S.P.S.T.	2 Screws	25A @6VDC, 15A @ 12VDC	7/16"	5/8"	Plastic (Ivory)	765007	-



765002

Extra Heavy-Duty

Positions	Circuitry	Description	Terminal Type	Current Rating	Mounting Stem (Diameter)	Length	Knob	1 PC/PK	25 PCS/PK
2	OFF-ON	S.P.S.T.	2 Screws	75A @ 12VDC, (6-28VDC)	15/32"	5/8"	Chrome Plated	765002	765002B

G



765060

Sealed Plunger Switch

765060 2 positions (ON-OFF, Normally ON; push to OFF). 10 amps @ 14V, Self-tapping thread. Self Adjusting, switch length 2-1/8". Mating connector has three 8" 18GA wire leads.


Push Button Door Switch (with Boot)




***765212** 2-Positions (ON-OFF, OFF with Plunger depressed, Spring return to ON). S.P.S.T., 4A @ 12VDC Lamp load. Two 2mm x 5mm Blade Terminals. Plastic Button, Black Rubber Boot protects the face of the Switch. Similar to p# 9006



*765212

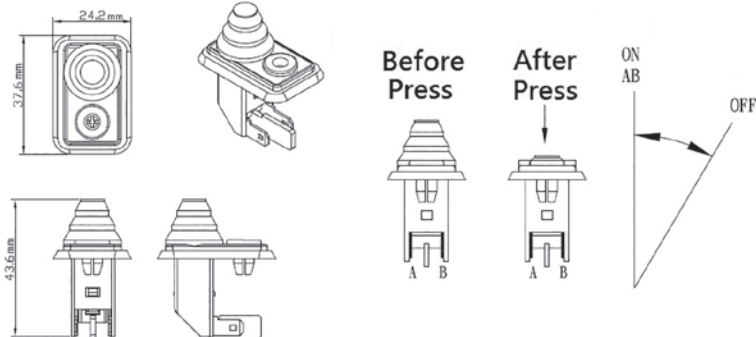

Axle Switch



765211

765211 Two Speed Axle Shift Limit Switch. 2 Position Both ON controls. High and Low Axle Ranges. Die cast body protected with rubber cover. Three Female Terminals to receive Bullet Terminals. Large Red Knob for use with Eaton 2-Speed Rear Axle