


Terminal Blocks



762133

Terminal Block (Screw-Type) with Common "Hot-Feed" Connection

762133 Maximum 36 VDC. Solid brass buss bar with 1/4" stud power terminals. #8-32 screws for 10 circuit connections. #10 mounting holes are 5-3/8" apart, centre to centre

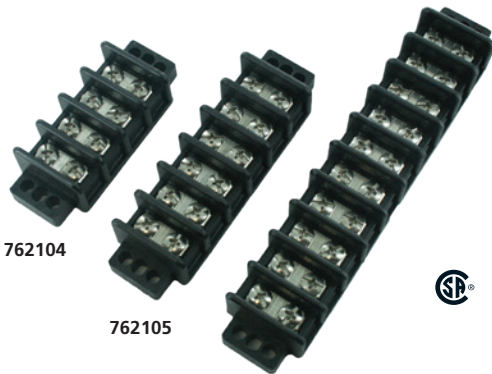

762104

762105

762106



Terminal Blocks (Screw-Type) with Independent Feeds

- 300 Volts • 20 Amps • Distance between barriers: .353"
- Terminal Screw size: #6-32 phillslot combination
- Terminals will accept maximum wire size of 12GA
- Dimensions: 1.37"W x 0.75"H • CSA Approved/UL Listed

# of Studs	Mounting Hole Centres	Length	Part#
4	2.18"	2.51" (63.8mm)	762104
6	3.06"	3.38" (85.9mm)	762105
10	4.81"	5.13" (130.3mm)	762106

J



762109

762114

762112

762113



Terminal Blocks (Stud-Type) – 'Non Feed Thru'

- 600 Volts • 30 Amps
- .750" centres on a 'dog-point' to guide nut onto #10-24 thread
- Non Feed-thru • CSA Approved/UL Listed

# of Studs	Mounting Hole Centres	Length	Part#
4	3.75"	4-1/2" (114.3mm)	762109
6	5.25"	6" (152.4mm)	762114
8	6.75"	7-1/2" (190.5mm)	762112
10	8.25"	9" (228.6mm)	762113