

# Multi-Conductor Cable

**B**



2 Conductor Speaker Wire

## 2 Conductor Speaker Wire

- Stranded Bare & Tinned Copper Conductors are made parallel within a PVC Insulation
- For use in applications up to 30 Volts

Gauge/Conductors	25' (7.62m)	100' (30.5m)
18/2	668403	768403

## Parallel Bonded PVC Cable

- General purpose, low tension GPT type cable
- Parallel bonded conductors are PVC insulated
- For use in applications up to 60 Volts
- Temperature rating: -30°C to 80°C (-22°F to 176°F)
- SAE specification J1128

### 2 Conductor, Parallel Bonded PVC Cable

Parallel bonded **Black and Red** conductors are PVC insulated




Type GPT-2 Conductor - Parallel Bonded

Gauge/Conductors	Stranding	100' (30.5m) Spool	250' (76.2m) Spool	1000' (305m) Spool	2500' (762m) Spool
16/2 (Black, Red)	19 x 29 x .113"	768401	768405		768416

### 3 Conductor, Parallel Bonded PVC Cable

Parallel bonded **Brown, Green, Yellow** conductors are PVC insulated

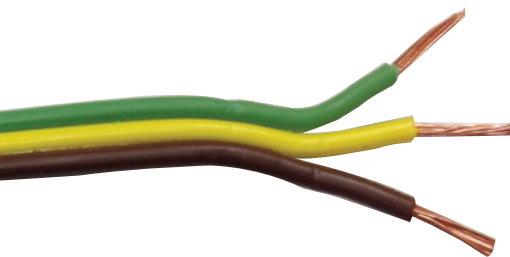


Type GPT-3 Conductor - Parallel Bonded

Gauge/Conductors	Stranding	100' (30.5m) Spool	250' (76.2m) Spool	1000' (305m) Spool	2500' (762m) Spool
16/3 (Brown, Green, Yellow)	19 x 29 x .011"	768089			
14/3 (Brown, Green, Yellow)	19 x 27 x .014"	768091			

### 4 Conductor, Parallel Bonded PVC Cable

Parallel bonded **Brown, Green, White, Yellow** conductors are PVC insulated

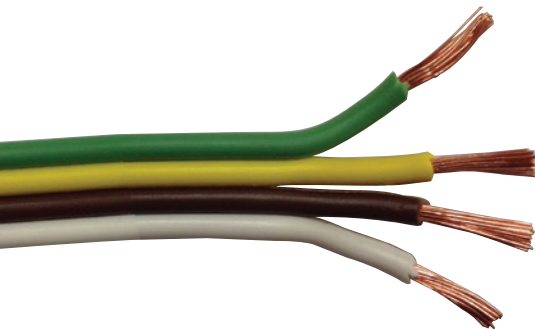

Type GPT-4 Conductor - Parallel Bonded

Gauge/Conductors	Stranding	100' (30.5m) Spool	250' (76.2m) Spool	1000' (305m) Spool	2500' (762m) Spool
16/4 (Brown, Green, White, Yellow)	19 x 29 x .011"	768090	768481		
14/4 (Brown, Green, White, Yellow)	19 x 27 x .014"	768092		768093	