


## Extension Cord Cable

**B**

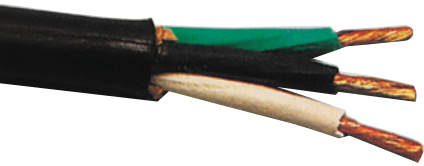

Neoprene Jacketed Extension Cable

### Extension Cord Cable – Neoprene Jacketed

Extra flexible type SJ00W jacket cable for use as power supply for machine tools, drills and general shop use where subjected to hard usage in a damp or dry location. Oil and flame retardant. CSA and UL approved. For applications up to 300 Volts. Temperature rating: -40°C to 90°C (-40°F to 194°F)


#### 2 Conductor

Gauge/Conductors	Stranding	Outside Diameter	250FT (76.2m)
14/2 (Black/White)	41 x .010"	.340"	769034

#### 3 Conductor

Gauge/Conductors	Stranding	Outside Diameter	250FT (76.2m)
18/3 (Black/Green/White)	16 x .010"	.305"	769039
16/3 (Black/Green/White)	26 x .010"	.330"	769033
14/3 (Black/Green/White)	41 x .010"	.365"	769035
12/3 (Black/Green/White)	65 x .010"	.433"	769036

See page 114 for cord band (ladder) cable ties...great for use with extension cords.



Socket and Plug

### Replacement Socket and Plug

Made of Thermoplastic Rubber. Repair or fabricate your own extension cords. 3 Conductor, 110 Volts.

Type	1 PC/PK	10 PCS/PK
Male Plug	769758	769758B
Female Socket	769759	769759B



\*769827



### Wire Protector Floor Ramp

\*769827 Easily protects wire cable/extension cords that are on the floor. Prevents people from tripping over wires. Available in a black 5 foot piece. Dimensions of floor ramp: 8.1cm (3.2") wide, 1.7cm (0.68") high, 1.5M (5') long. Inside, the dimensions are: 2cm (0.8") wide, 1.2cm (0.49") high. This ramp is designed to accommodate virtually all sizes of automotive cable.



Channel View

