



## Circuit Protection

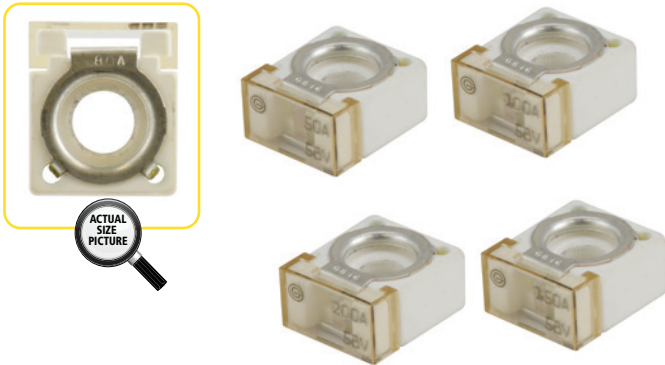

### Battery Fuses

- 58 VDC
- White Housing
- Complies with: ISO 8820-6, DIN 72581-5, UL 248 (Special Purpose Fuses)
- Marine Rated (Complies with ABYC requirements)

Amperage	1 PC/PK	Amperage	1 PC/PK
50A	766569	200A	766577
75A	766571	250A	766579
100A	766573	300A	766580
125A	766574	400A	*766582 <sup>+NEW</sup>
150A	766575		

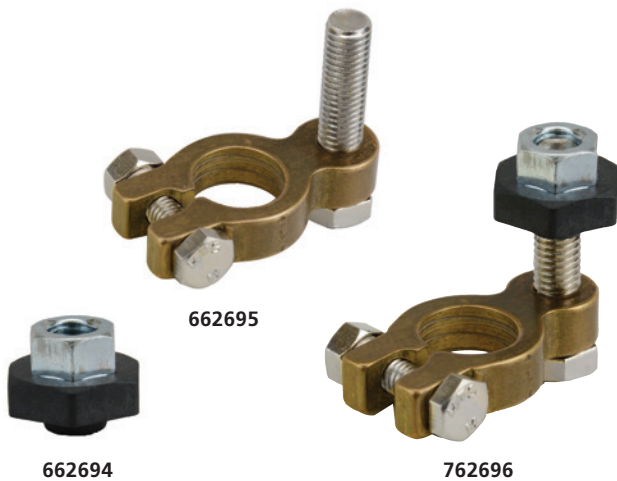

### Battery Fuse Accessories

#### Battery Terminals

<sup>+NEW</sup>

Description	1 PC/PK	10 PCS/PK
Universal Battery Terminal (Brass) with extra long stud	*662695	762695
Insulated Nut (Steel Nut, Polymer Insulation)	*662694	762694

#### Battery Terminal & Insulated Nut Set

**762696** Consists of 1 x **662695** Battery Terminal and 1 x **662694** Insulated Nut. Battery Fuse not included



#### Battery Fuse Holder & Insulated Nut Set

<sup>+NEW</sup> **\*766269** Stud Terminal Fuse Holder with an insulated cover to help prevent short circuits. Compact design allows for a variety of uses. Maximum Voltage and Current Rating: 58VDC, 300A. Comes complete with the **662694** Insulated Nut. Battery Fuse not included

