


Back-Up Alarms

TECHSPAN® Tonal Back-Up Alarms conform to SAEJ994 safety standards (except for the self-adjusting models) and can be used for 12-24 Volt applications. Solid state electronics are totally encapsulated in epoxy thus sealing alarms against moisture, vibration & corrosion. Polarity protected Nylon Housing. Units are steam-cleanable. Operating temperature: -40°C to 80°C. Universal Mounting. IP67. Screw Terminals.

Units showing a range of decibel levels mean they automatically adjust to changing ambient noise levels. These alarms adjust to a minimum of 5dB above surrounding noise levels.

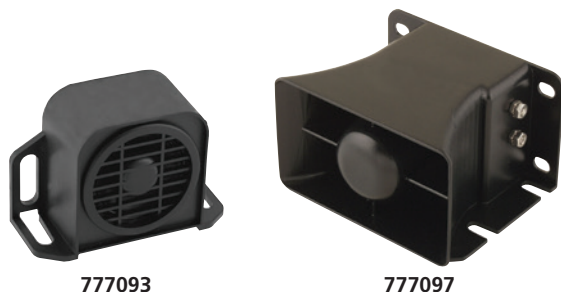

777093

777097

Tonal Back-Up Alarms (Self-Adjusting)

Decibel Level(s)	Voltage	Current Rating	1PC/PK	10 PCS/PK
77-102dB	12-24VDC	0.6A	777093	777093B
87-112dB	12-24VDC	0.8A	777097	777097B



777088

Tonal Back-Up Alarms (Single Decibel)

Decibel Level(s)	Voltage	Current Rating	1PC/PK ^{*NEW} (Clamshell)	1PC/PK (Colour Box)	10 PCS/PK
87dB	12-24VDC	0.6A	—	777088	777088B
97dB	12-24VDC	0.8A	*777082-DP	777082	777082B
107dB	12-24VDC	0.8A	*777083S-DP	*777083S	*777083SB
112dB	12-24VDC	0.8A	—	777084	777084B



*NEW



777082



*777083S



777084



777083 has been superseded by p# 777083S
777083B has been superseded by p# 777083SB

The 97db & 107db Tonal Back-Up Alarms Have A New Look (Grill Design, Screw Terminations, Packaging)

NEW LOOK



777082 Previous Version



777083 Previous Version



777082 Updated Version



777083S Updated Version

