


TECHSPAN SIGNATURE TECK CONNECTORS



The **NEW** Signature Teck Connector, exclusively from Techspan, brings a refined take on a trusted design to the Canadian Market.


- 360° Grounding Tines
- Integrated Compression Ring
- Wider cable range, meaning less SKUs to stock

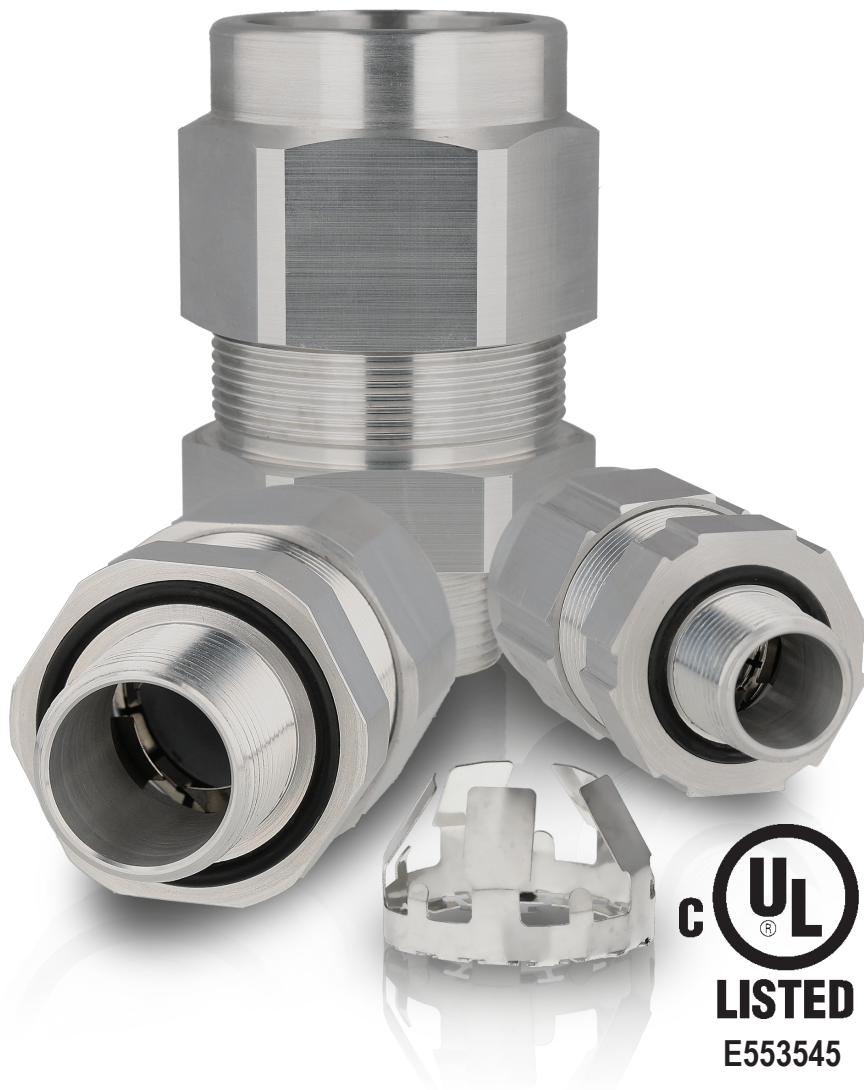

PRODUCT SPECIFICATIONS

Body Material:	Aluminum
Grounding Tines Material:	Corrosion Resistant Beryllium Copper (CuBe)
Temperature Range:	-40°C to +90°C
IP Rating:	IP66
UL Location Rating:	Ex ec IIC Gc X Ex tc IIIC Dc X IP66 Ts -40°C to +90°C Zone 2, IIC; Zone 22, IIIC

TECHSPAN SIGNATURE TECK CONNECTORS

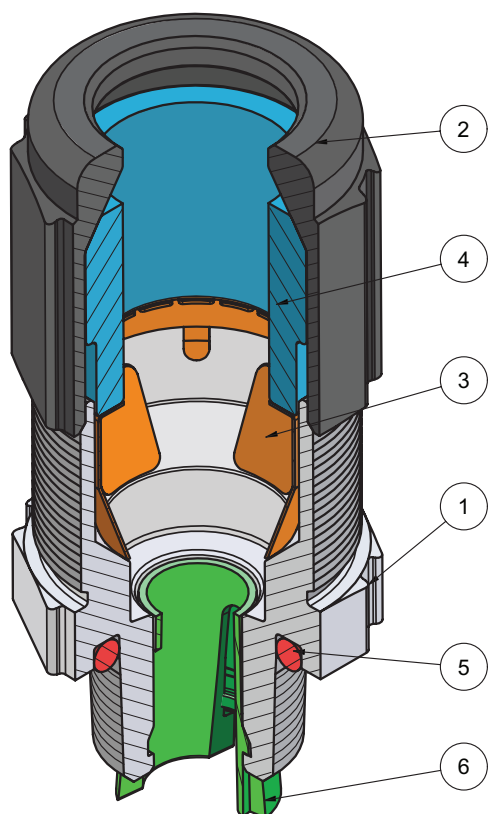

- ① **Aluminum Main Body**
0.5" and 0.75" NPT bodies include cutouts on wrench flats for easier installation.
- ② **Aluminum Cap**
Integrated Compression tooling eliminates the need for a separate compression ring.
- ③ **360° Grounding Tines**
Beryllium Copper grounding tines provide reliable contact around the cable armor. Beryllium Copper brings an added level of durability over traditional Stainless Steel tines with added conductivity, hardness and corrosion resistance.
- ④ ⑤ **Neoprene Cable Seal and O-Ring**
The Neoprene Seal and integrated O-Ring provide a robust IP66 seal and are highly resistant to temperature fluctuations, oils and chemicals. Built to last in Canada's harshest environments.
- ⑥ **Removable Armor Stop**
Some sizes include a removable armor stop to accomodate the smallest cable on their range without sacrificing any other features.

Part No	Entry Thread NPT	Minimum Thread Length	Cable Outer Jacket Diameter		Cable Armor Diameter		Thru Bore	Width	Cable Stripping Length	Assembly Torque n.m.	Removable Armor Stop
			Min.	Max.	Min.	Max.					
TSTK-050-1	1/2"	0.630	0.524	0.776	0.415	0.695	0.480	1.339	0.875	34.0	Yes
TSTK-050-2	1/2"	0.630	0.724	0.988	0.615	0.905	0.587	1.575	0.875	34.0	
TSTK-075-3	3/4"	0.793	0.953	1.205	0.845	1.125	0.803	1.890	1.000	56.5	
TSTK-100-4	1"	0.985	1.185	1.378	1.077	1.295	1.047	2.008	1.000	79.0	
TSTK-125-5	1 1/4"	1.008	1.350	1.598	1.240	1.535	1.382	2.559	1.250	79.0	Yes
TSTK-125-6	1 1/4"	1.008	1.598	1.878	1.496	1.795	1.382	2.559	1.250	79.0	
TSTK-150-7	1 1/2"	1.025	1.724	1.976	1.615	1.890	1.610	2.953	1.500	79.0	
TSTK-150-8	1 1/2"	1.025	1.976	2.189	1.850	2.107	1.610	2.953	1.500	79.0	
TSTK-200-9	2"	1.059	2.098	2.378	1.990	2.280	2.067	3.346	1.750	79.0	Yes
TSTK-200-10	2"	1.059	2.350	2.752	2.240	2.656	2.067	3.740	1.750	79.0	

*All Dimensions are in Inches