

QSFP-100G-2DW34-AR-C

Arista Networks® QSFP-100G-2DW34-AR Compatible TAA 100GBase-DWDM PAM4 QSFP28 Transceiver C-Band (SMF, 1550.12nm, 80km w/EDFA/DCM, LC, DOM)

Features:

- SFF-8665 Compliance
- Duplex LC Connector
- 100GHz DWDM ITU Grid
- Single-mode Fiber
- Commercial Temperature 20 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



Applications:

- 100GBase Ethernet
- Access, Metro and Enterprise

Product Description

This Arista Networks® QSFP-100G-2DW34-AR compatible QSFP28 transceiver provides 100GBase-DWDM throughput up to 80km over single-mode fiber (SMF) PAM4 using a wavelength of 1550.12nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Arista Networks®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

Wavelength Guide (100GHz ITU-T Channel)

| Channel # | Frequency (GHz) | Wavelength (nm) | Frequency (GHz) | Wavelength (nm) |
|-----------|-----------------|-----------------|-----------------|-----------------|
| | L0 | | L1 | |
| 16 | 191600 | 1564.68 | 191650 | 1564.27 |
| 17 | 191700 | 1563.86 | 191750 | 1563.45 |
| 18 | 191800 | 1563.05 | 191850 | 1562.64 |
| 19 | 191900 | 1562.23 | 191950 | 1561.83 |
| 20 | 192000 | 1561.42 | 192050 | 1561.01 |
| 21 | 192100 | 1560.61 | 192150 | 1560.2 |
| 22 | 192200 | 1559.79 | 192250 | 1559.39 |
| 23 | 192300 | 1558.98 | 192350 | 1558.58 |
| 24 | 192400 | 1558.17 | 192450 | 1557.77 |
| 25 | 192500 | 1557.36 | 192550 | 1556.96 |
| 26 | 192600 | 1556.56 | 192650 | 1556.15 |
| 27 | 192700 | 1555.75 | 192750 | 1555.34 |
| 28 | 192800 | 1554.94 | 192850 | 1554.54 |
| 29 | 192900 | 1554.13 | 192950 | 1553.73 |
| 30 | 193000 | 1553.33 | 193050 | 1552.93 |
| 31 | 193100 | 1552.52 | 193150 | 1552.12 |
| 32 | 193200 | 1551.72 | 193250 | 1551.32 |
| 33 | 193300 | 1550.92 | 193350 | 1550.52 |
| 34 | 193400 | 1550.12 | 193450 | 1549.72 |
| 35 | 193500 | 1549.32 | 193550 | 1548.91 |
| 36 | 193600 | 1548.52 | 193650 | 1548.11 |
| 37 | 193700 | 1547.72 | 193750 | 1547.32 |
| 38 | 193800 | 1546.92 | 193850 | 1546.52 |
| 39 | 193900 | 1546.12 | 193950 | 1545.72 |
| 40 | 194000 | 1545.32 | 194050 | 1544.92 |
| 41 | 194100 | 1544.53 | 194150 | 1544.13 |
| 42 | 194200 | 1543.73 | 194250 | 1543.33 |
| 43 | 194300 | 1542.94 | 194350 | 1542.54 |
| 44 | 194400 | 1542.14 | 194450 | 1541.75 |
| 45 | 194500 | 1541.35 | 194550 | 1540.95 |
| 46 | 194600 | 1540.56 | 194650 | 1540.16 |
| 47 | 194700 | 1539.77 | 194750 | 1539.37 |
| 48 | 194800 | 1538.98 | 194850 | 1538.58 |

| | | | | |
|----|--------|---------|--------|---------|
| 49 | 194900 | 1538.19 | 194950 | 1537.79 |
| 50 | 195000 | 1537.4 | 195050 | 1537 |
| 51 | 195100 | 1536.61 | 195150 | 1536.22 |
| 52 | 195200 | 1535.82 | 195250 | 1535.43 |
| 53 | 195300 | 1535.04 | 195350 | 1534.64 |
| 54 | 195400 | 1534.25 | 195450 | 1533.86 |
| 55 | 195500 | 1533.47 | 195550 | 1533.07 |
| 56 | 195600 | 1532.68 | 195650 | 1532.29 |
| 57 | 195700 | 1531.9 | 195750 | 1531.51 |
| 58 | 195800 | 1531.12 | 195850 | 1530.72 |
| 59 | 195900 | 1530.33 | 195950 | 1529.94 |
| 60 | 196000 | 1529.55 | 196050 | 1529.16 |
| 61 | 196100 | 1528.77 | 196150 | 1528.38 |

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typical | Max. | Unit |
|-----------------------|-------------------|------|---------|----------------------|------|
| Signal Input Voltage | V _{in} | -0.5 | | V _{cc} +0.5 | V |
| Power Supply Voltage | V _{cc} | -0.5 | | 3.6 | °C |
| Storage Temperature | T _S | 5 | | 85 | °C |
| Operating Temperature | T _{case} | 20 | | 70 | °C |

Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|----------------------|-----------------|-------|------|-------|------|-------|
| Power Supply Voltage | V _{cc} | 3.135 | 3.3 | 3.465 | V | |
| Power Dissipation | P _D | | 4 | 5 | W | |

Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|-----------------------------|-----------------|------|-----------|------|------|-------|
| Transmitter | | | | | | |
| Optical Wavelength | λ_C | 1480 | λ | 1580 | nm | |
| Channel Spacing | Δf | | 100 | | GHz | |
| Optical Extinction Ratio | ER | | 6 | | dB | |
| Side-Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Spectral Width | $\Delta\lambda$ | | +/-25 | 1 | GHz | |
| Optical Transmit Power | Pout/lane | -11 | -10 | -8 | dBm | |
| Receiver | | | | | | |
| Optical Wavelength | λ_C | 1480 | | 1580 | nm | |
| Receiver Max. Sensitivity | Pmin | -3 | -2.5 | -2 | dBm | |
| Damage Threshold | Pmax | 10 | | | dBm | |
| Optical Return Loss | ORL | | | 20 | dBm | |
| LOS Hysteresis | LOSH | | 1.0 | | dB | |
| LOS Assert | LOSA | -10 | | | dBm | |
| LOS De-Assert | LOSD | | | -3 | dBm | |

Electrical Pin-out Details



Pin Descriptions

| Pin | Logic | Symbol | Name/Descriptions | Plug Sequence | Ref. |
|-----|-------------|---------|--------------------------------------|---------------|------|
| 1 | | GND | Ground | 1 | 1 |
| 2 | CML-I | Tx2n | Transmitter Inverted Data Input | 3 | |
| 3 | CML-I | Tx2p | Transmitter Non-Inverted Data output | 3 | |
| 4 | | GND | Ground | 1 | 1 |
| 5 | CML-I | Tx4n | Transmitter Inverted Data Input | 3 | |
| 6 | CML-I | Tx4p | Transmitter Non-Inverted Data output | 3 | |
| 7 | | GND | Ground | 1 | 1 |
| 8 | LVTTTL-I | ModSelL | Module Select | 3 | |
| 9 | LVTTTL-I | ResetL | Module Reset | 3 | |
| 10 | | VccRx | +3.3V Power Supply Receiver | 2 | 2 |
| 11 | LVCNOS- I/O | SCL | 2-Wire Serial Interface Clock | 3 | |
| 12 | LVCNOS- I/O | SDA | 2-Wire Serial Interface Data | 3 | |
| 13 | | GND | Ground | 1 | 1 |
| 14 | CML-O | Rx3p | Receiver Non-Inverted Data output | 3 | |
| 15 | CML-O | Rx3n | Receiver Inverted Data output | 3 | |
| 16 | | GND | Ground | 1 | 1 |
| 17 | CML-O | Rx1p | Receiver Non-Inverted Data output | 3 | |
| 18 | CML-O | Rx1n | Receiver Inverted Data output | 3 | |
| 19 | | GND | Ground | 1 | 1 |
| 20 | | GND | Ground | 1 | 1 |
| 21 | CML-O | Rx2n | Receiver Inverted Data output | 3 | |
| 22 | CML-O | Rx2p | Receiver Non-Inverted Data output | 3 | |
| 23 | | GND | Ground | 1 | 1 |
| 24 | CML-O | Rx4n | Receiver Inverted Data output | 3 | |
| 25 | CML-O | Rx4p | Receiver Non-Inverted Data output | 3 | |
| 26 | | GND | Ground | 1 | 1 |
| 27 | LVTTTL-O | ModPrsL | Module Present | 3 | |
| 28 | LVTTTL-O | IntL | Interrupt | 3 | |
| 29 | | VccTx | +3.3V Power Supply Transmitter | 2 | 2 |
| 30 | | Vccl | +3.3V Power Supply | 2 | 2 |
| 31 | LVTTTL-I | LPMODE | Low Power Mode | 3 | |
| 32 | | GND | Ground | 1 | 1 |
| 33 | CML-I | Tx3p | Transmitter Non-Inverted Data input | 3 | |
| 34 | CML-I | Tx3n | Transmitter Inverted Data Input | 3 | |
| 35 | | GND | Ground | 1 | 1 |
| 36 | CML-I | Tx1p | Transmitter Non-Inverted Data input | 3 | |
| 37 | CML-I | Tx1n | Transmitter Inverted Data Input | 3 | |
| 38 | | GND | Ground | 1 | 1 |

Notes:



1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. VccRx, Vcc1 and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in Table 6. Recommended host board power supply filtering is shown in Figures 3 and 4. Vcc Rx Vcc1 and Vcc Tx may be internally connected within the QSFP28 Module in any combination. The connector pins are each rated for a maximum current of 500Ma.

DOM Specifications

| Parameter | Min. | Typ. | Max. | Unit |
|--|------|------|------|------|
| Receive Power Monitor Accuracy | -2 | | 2 | dB |
| Transmit Power Monitor | -2 | | 2 | dB |
| Laser Bias Current Monito Accuracy | -10 | | 10 | % |
| Transceiver Temperature Monitor Accuracy | -5 | | 5 | °C |
| Internally Measured Transceiver Supply Voltage | | | 3 | % |

Mechanical Specifications

Measurement unit: mm

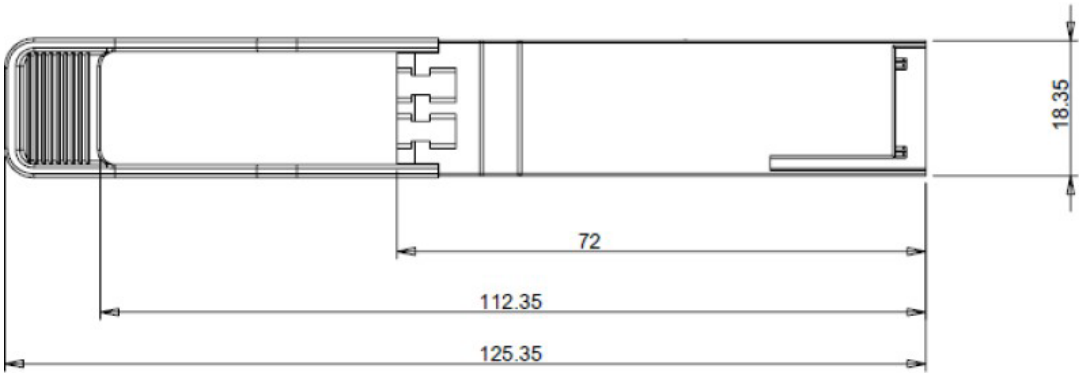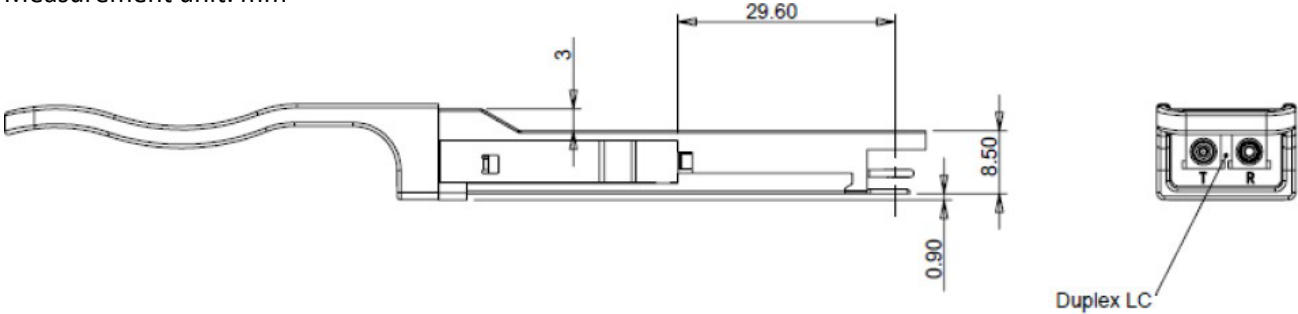

About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com

Telephone: +44 1285 719 600