


ILLUSTRATIONS ARE REPRESENTATIVE OF A TYPICAL STRATTA INSTALLATION. SIZE, SHAPE, & DETAILS OF YOUR FIXTURE WILL VARY BASED ON YOUR PROJECT. REFER TO SHOP DRAWINGS FOR SPECIFIC INFORMATION ABOUT YOUR FIXTURE.

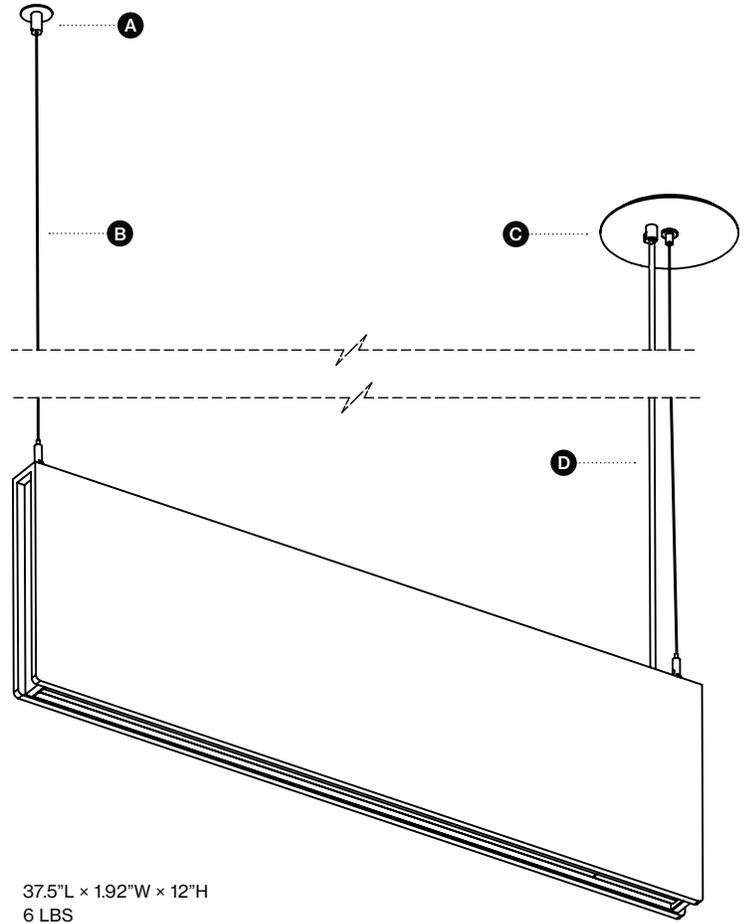


- A** CEILING CONNECTOR (×1)
- B** STAINLESS STEEL CABLE (×2)
- C** CANOPY (×1)
- D** POWER CORD (×1)

37.5" L × 1.92" W × 12" H
6 LBS

Specifications


SHIPPING / RECEIVING	SHIPPING / RECEIVING	HANDLING	CLEANING
<p>Fixtures boxed & shipped individually or for large quantities, on 4' x 4' or 4' x 8' pallets</p> <p>Customer responsible for receiving & unloading of fixtures</p> <p>Pallet jack / forklift strongly recommended (palletized orders only)</p> <p>Fixtures must be stored indoors in a climate controlled location prior to installation</p>	<p>(2-3) People required for safe & efficient installation</p> <p>(2) Ladders or scissors lifts</p> <p>All necessary tools needed for proper wiring of fixture to supply circuits</p>	<p>Fixtures should remain boxed for protection until needed for installation</p> <p>Fixtures are constructed of durable PET felt, but must be handled with care</p> <p>Large fixture components should be handled by a minimum of 2 people</p> <p>Do not allow fixture components to rest on unpadded surfaces</p>	<p>Use vacuum or soft brush to clean fins. Do not use strong solvents, highly alkaline or abrasive cleaning agents</p>

Parts Overview

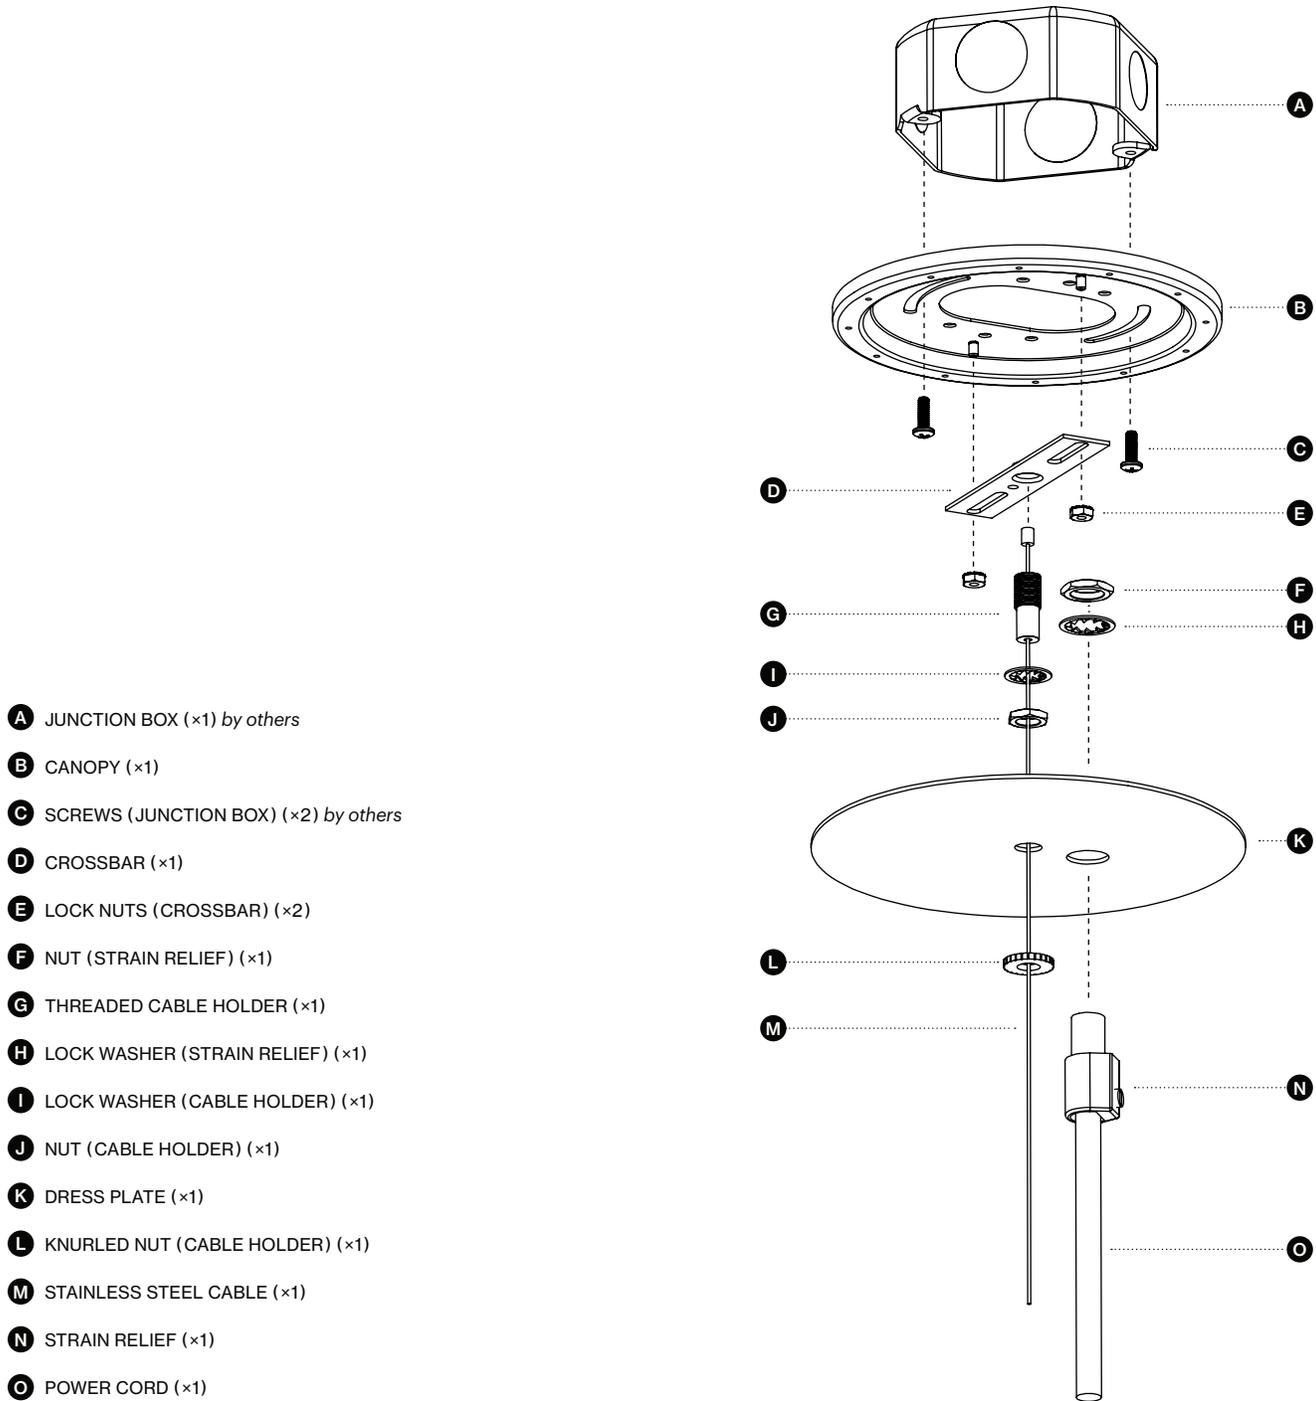


Step-by-step


- ① Install junction box. Refer to project-specific shop drawings provided by LightArt for exact locations.

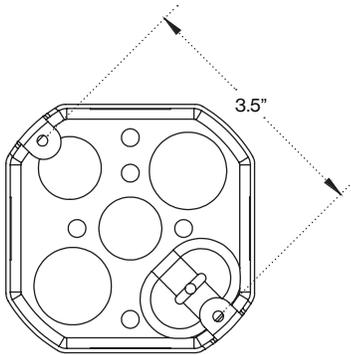


- ② Wiring: See wiring instructions and diagrams on page 10 for additional details.

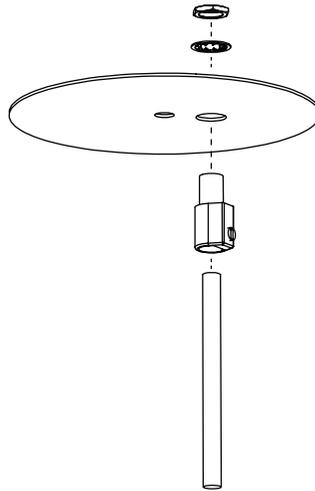


- ③ Pull the length of S.S. cable through the coupler until the swaged end catches inside.

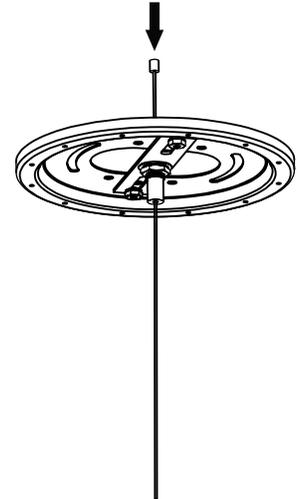


- ④ Push the connections and all excess wires into junction box. Secure canopy to crossbar using included fasteners.

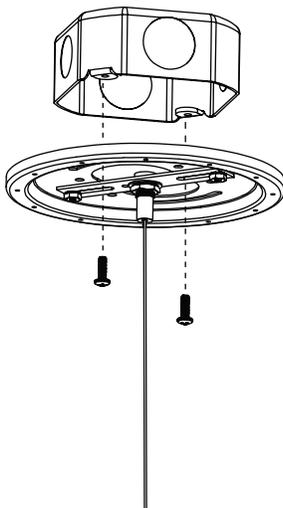


- ⑤ Install dress plate with knurled nut.

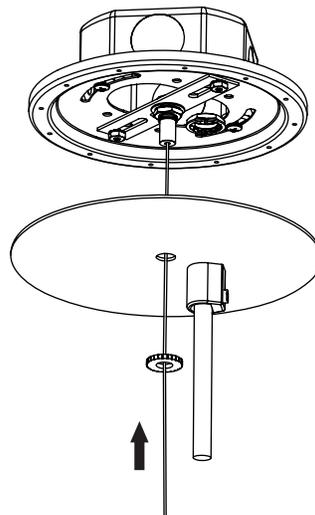

- ⑥ Continue screwing knurled nut until dress plate is firmly secured.

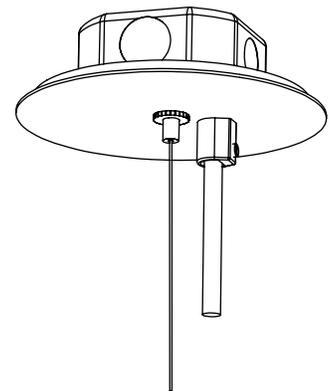


Parts Overview

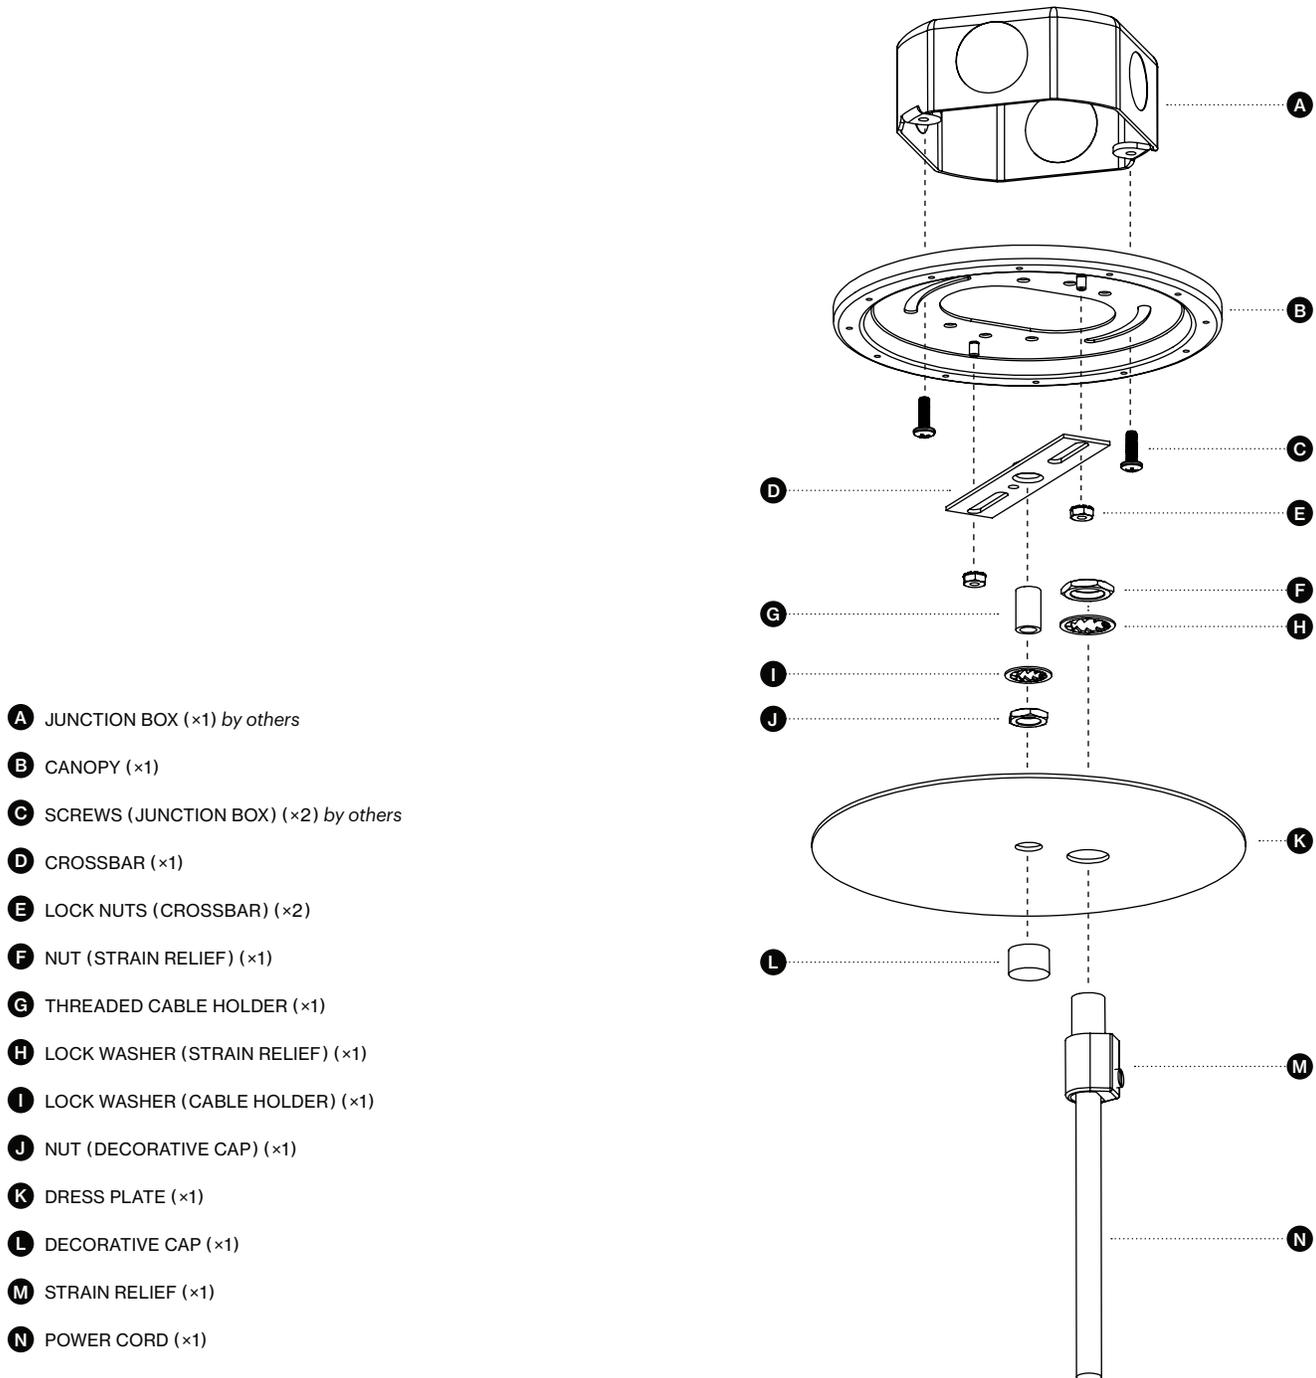


Step-by-step


- ① Install junction box. Refer to project-specific shop drawings provided by LightArt for exact locations.

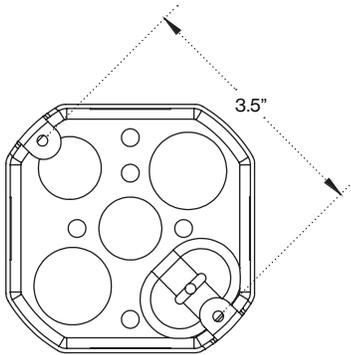


- ② Wiring: See wiring instructions and diagrams on page 11 for additional details.

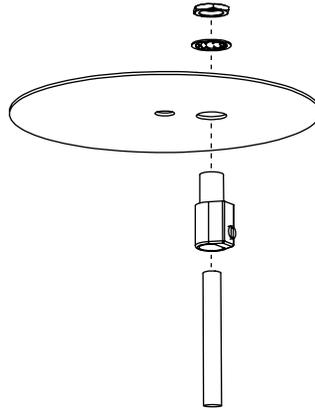


- ③ Push the connections and all excess wires into junction box. Secure canopy to crossbar using included fasteners.

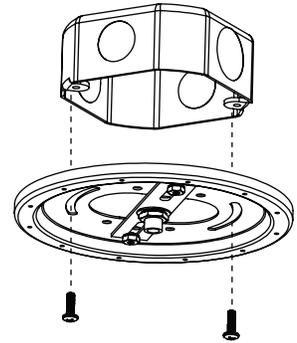

- ④ Install dress plate with decorative cap.

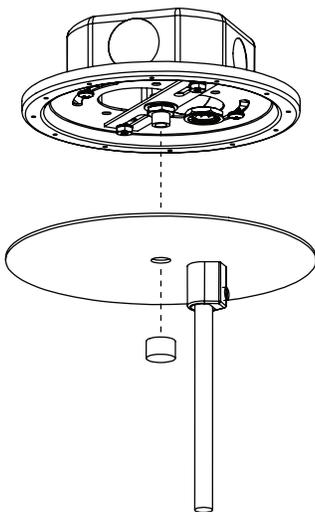


- ⑤ Continue screwing decorative cap until dress plate is firmly secured.

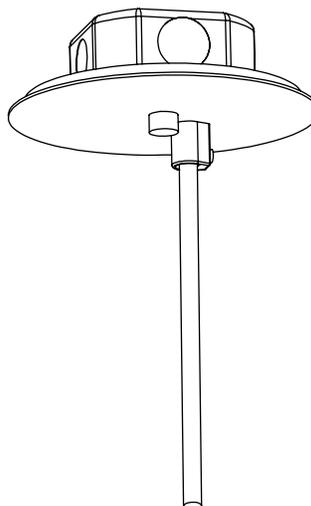


Acoustics Pick Point Layout


37 INCH STRATTA

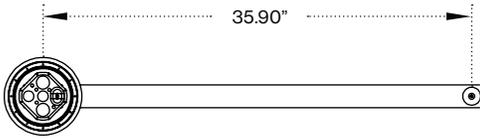


49 INCH STRATTA

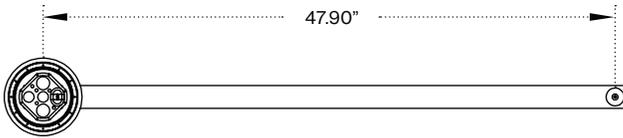


61 INCH STRATTA

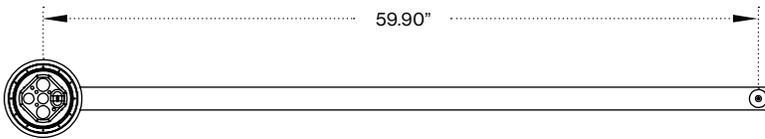


73 INCH STRATTA

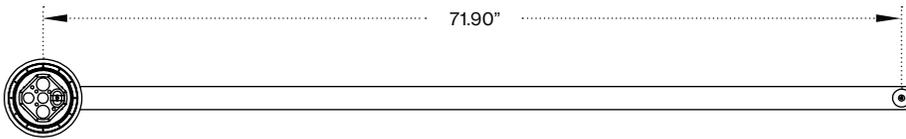

85 INCH STRATTA

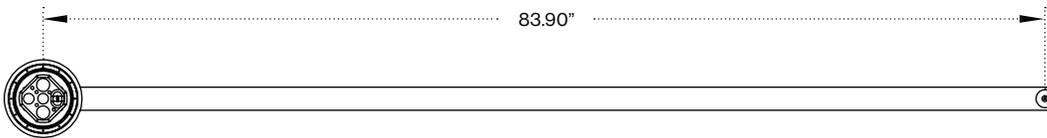

97 INCH STRATTA

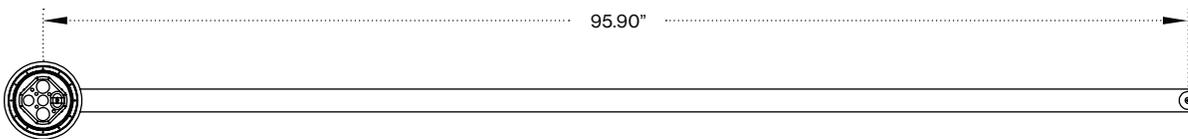

Acoustics

Dimensions & Weight

INSTALLATION INSTRUCTIONS

37 INCH STRATTA

6" HEIGHT	37.5" LENGTH × 1.92" WIDTH	4 LBS
12" HEIGHT	37.5" LENGTH × 1.92" WIDTH	6 LBS
16" HEIGHT	37.5" LENGTH × 1.92" WIDTH	7 LBS

49 INCH STRATTA

6" HEIGHT	49.5" LENGTH × 1.92" WIDTH	5 LBS
12" HEIGHT	49.5" LENGTH × 1.92" WIDTH	7 LBS
16" HEIGHT	49.5" LENGTH × 1.92" WIDTH	9 LBS

61 INCH STRATTA

6" HEIGHT	61.5" LENGTH × 1.92" WIDTH	5 LBS
12" HEIGHT	61.5" LENGTH × 1.92" WIDTH	7 LBS
16" HEIGHT	61.5" LENGTH × 1.92" WIDTH	9 LBS

73 INCH STRATTA

6" HEIGHT	73.5" LENGTH × 1.92" WIDTH	5 LBS
12" HEIGHT	73.5" LENGTH × 1.92" WIDTH	9 LBS
16" HEIGHT	73.5" LENGTH × 1.92" WIDTH	11 LBS

85 INCH STRATTA

6" HEIGHT	85.5" LENGTH × 1.92" WIDTH	6 LBS
12" HEIGHT	85.5" LENGTH × 1.92" WIDTH	10 LBS
16" HEIGHT	85.5" LENGTH × 1.92" WIDTH	12 LBS

97 INCH STRATTA


6" HEIGHT	97.5" LENGTH × 1.92" WIDTH	7 LBS
12" HEIGHT	97.5" LENGTH × 1.92" WIDTH	11 LBS
16" HEIGHT	97.5" LENGTH × 1.92" WIDTH	14 LBS

Parts Overview


Install 1/4-20 all thread, refer to project specific shop drawings provided by LightArt for exact locations.

Note: All-thread to be installed to support 60lb. minimum load


Note: All-thread should be installed to extend 1/2" below the line of the finish ceiling.

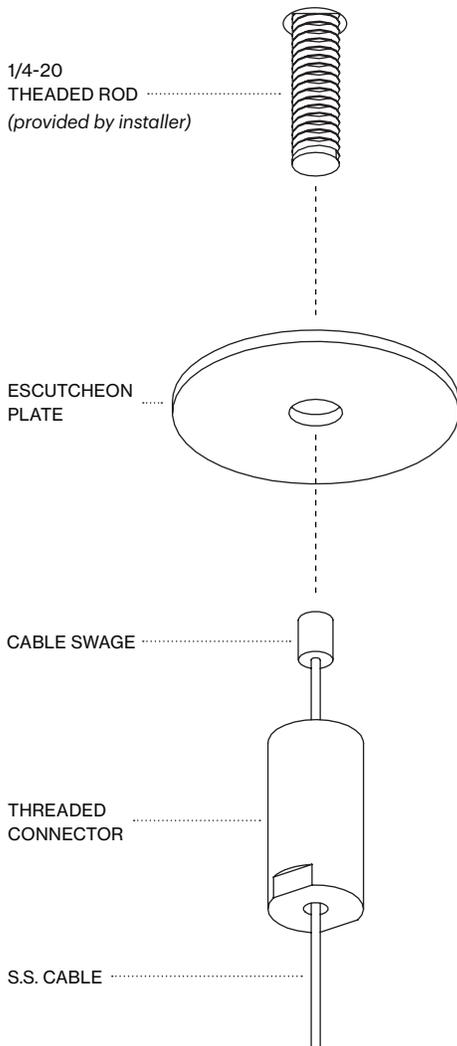


① Thread the adapter onto the all thread until firmly secured against ceiling as shown.

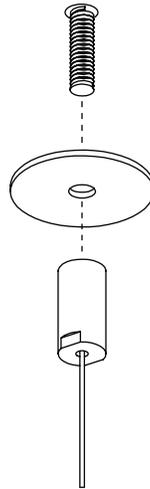


② Slide escutcheon plate over thread adapter & against the finished ceiling.

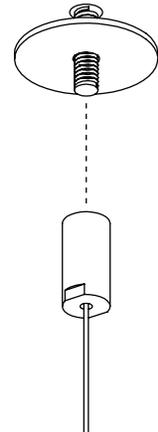

③ Thread ceiling coupler onto thread adapter as shown.

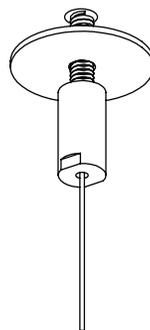


④ Continue threading ceiling coupler onto thread adapter until firmly secured against escutcheon plate at ceiling.

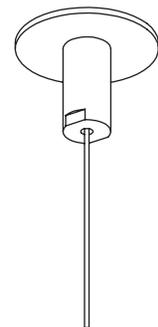


Step-by-step


- ① Attach dimming and power wires using connector plugs.

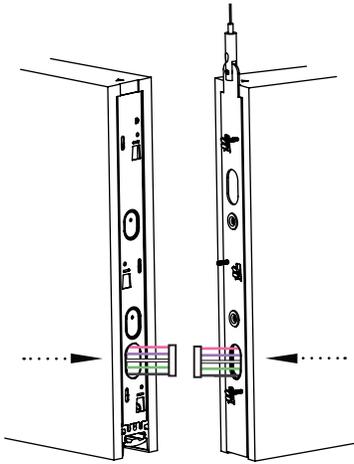


- ② Align lead screws with the slots on the female end. Lift up female end a 1/4" inch.

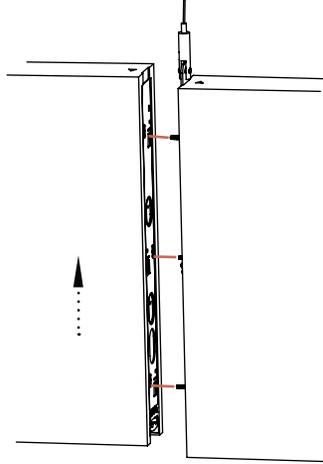


- ③ Slide beams together carefully while having the female end offset upward by a 1/4".

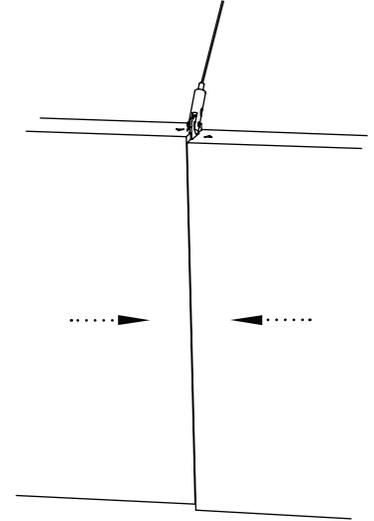

- ④ Press the female end and the male end opposite directions (up and down) until they snap together.

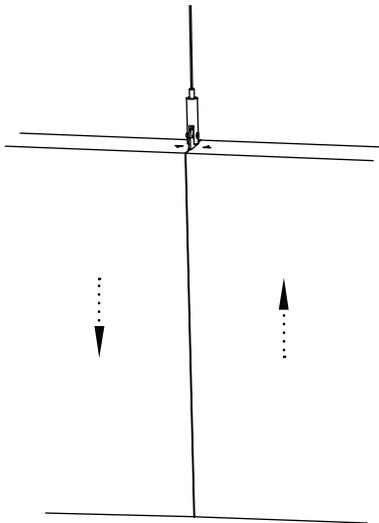


- ⑤ See page 6 for pick point installation.

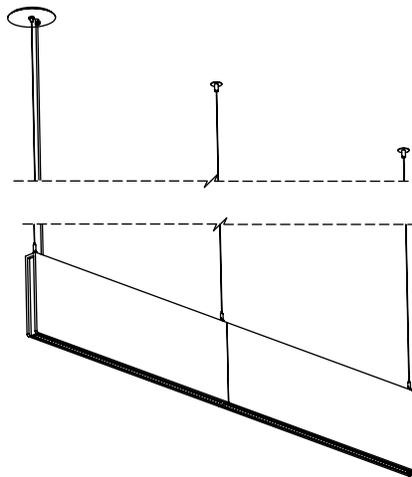

Wiring Diagram 0-10V Dimming

For illustration purposes only. Consult control manufacturer's spec. sheets for specific wiring requirements and fixture capacity.

-  INPUT AC LINE (BLACK)
-  INPUT GROUND (GREEN)
-  INPUT AC NEUTRAL (WHITE)
-  INPUT 0-10V DC DIM + POSITIVE (PURPLE)
-  INPUT 0-10V DC DIM - NEGATIVE (PINK)

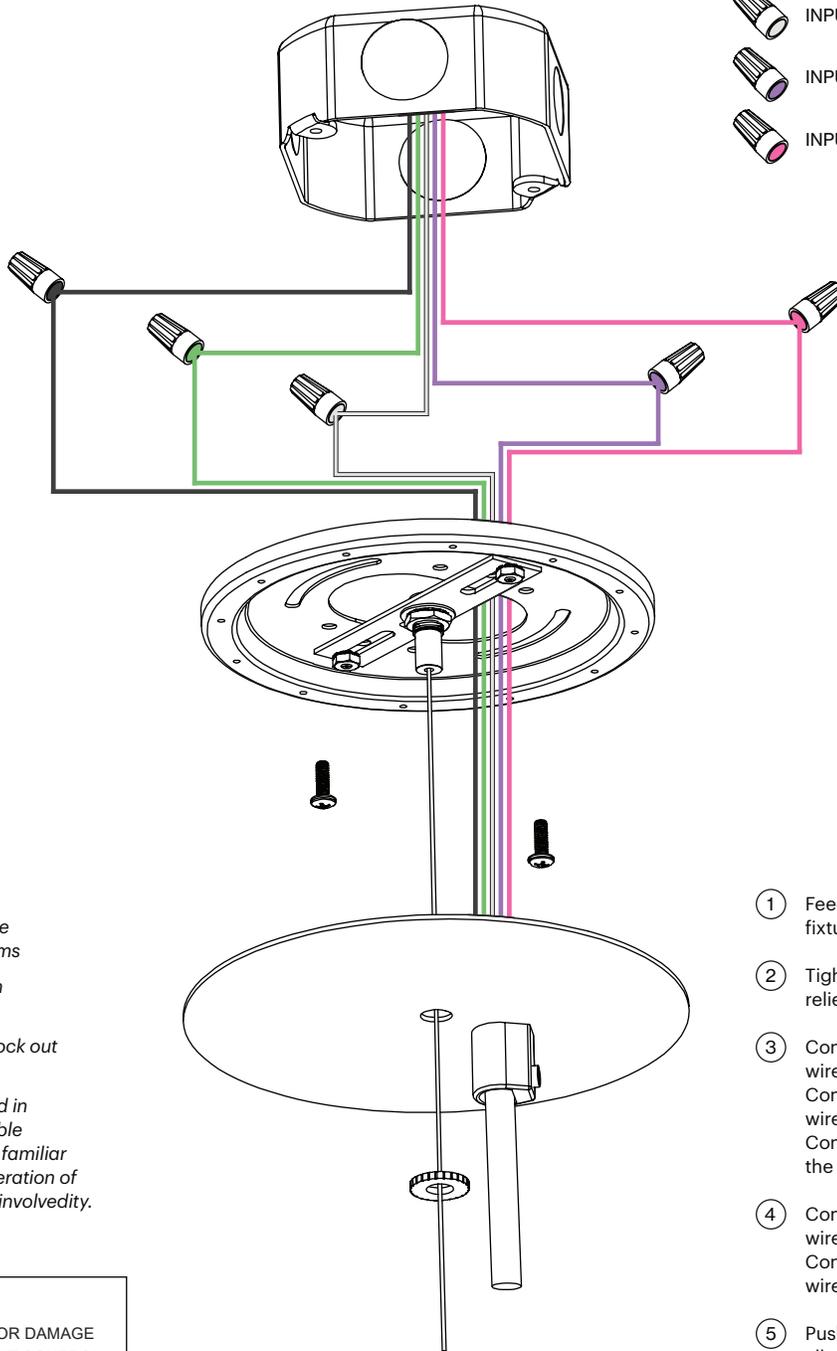

NOTICE

Wire according to appropriate manufacturers wiring diagrams

WARNING: Risk of shock from energized equipment.

Always turn power OFF and lock out during fixture installation

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

WARNING


LIGHTART IS NOT LIABLE FOR DAMAGE DUE TO MISWIRING 0-10 VOLT CONTROL WIRES, OR LOW VOLTAGE LED WIRES TO LINE VOLTAGE.

- 1 Feed the multi-wire white power cord from the fixture through the strain relief on dress plate.
- 2 Tighten set screw on strain relief to secure power cord.
- 3 Connect the WHITE (Input ACN) power supply wire to the WHITE (ACN) wire of the supply circuit. Connect the BLACK (Input ACL) power supply wire to the BLACK (ACL) wire of the supply circuit. Connect GREEN (GROUND) power supply wire to the GROUND wire of the supply circuit.
- 4 Connect the PURPLE (DIMMING +) power supply wire to the DIMMING + wire of the supply circuit. Connect the GRAY (DIMMING -) power supply wire to the DIMMING - wire of the supply circuit.
- 5 Push all line voltage connections and all excess wires into the junction box.
- 6 Secure canopy to junction box with provided fasteners.

Wiring Diagram 0-10V Dimming

For illustration purposes only. Consult control manufacturer's spec. sheets for specific wiring requirements and fixture capacity.

-  INPUT AC LINE (BLACK)
-  INPUT GROUND (GREEN)
-  INPUT AC NEUTRAL (WHITE)
-  INPUT 0-10V DC DIM + POSITIVE (PURPLE)
-  INPUT 0-10V DC DIM - NEGATIVE (PINK)

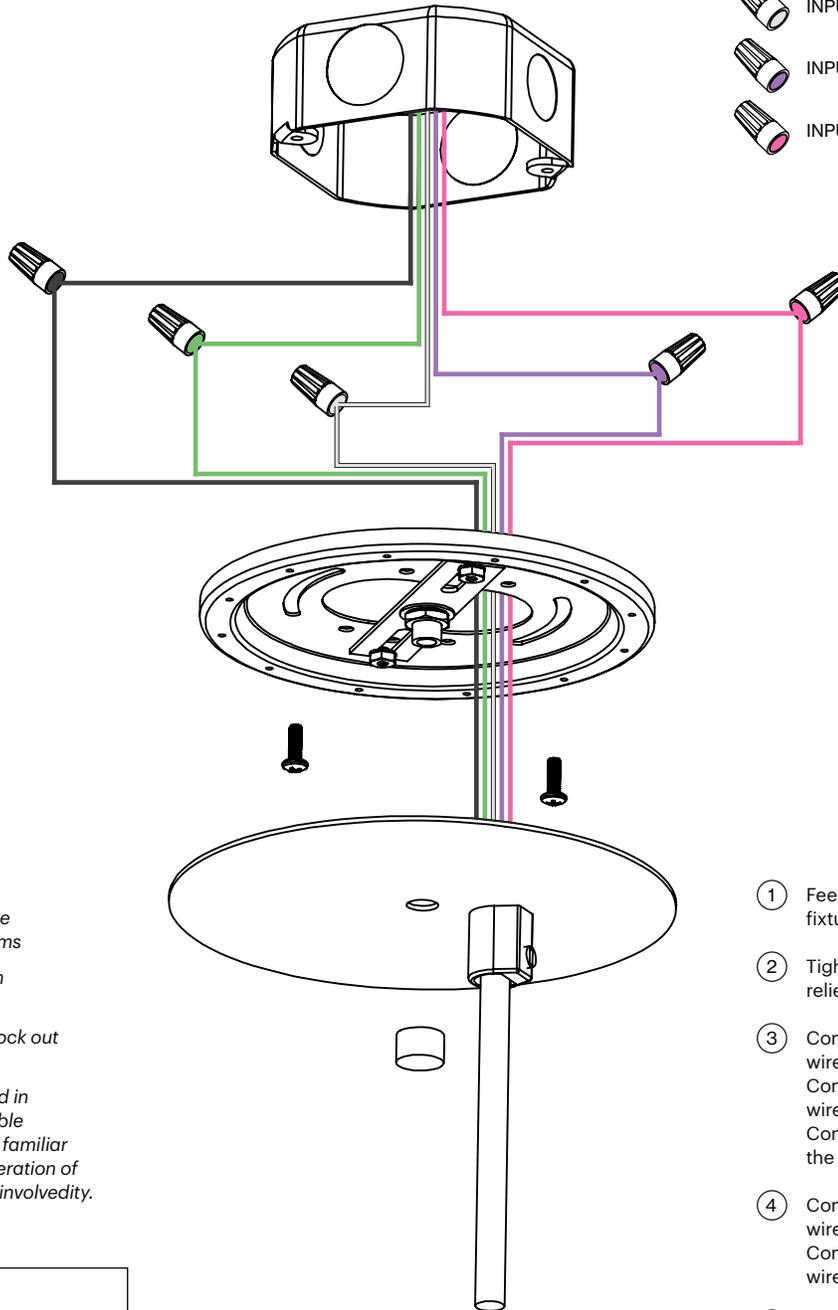

NOTICE

Wire according to appropriate manufacturers wiring diagrams

WARNING: Risk of shock from energized equipment.

Always turn power OFF and lock out during fixture installation

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

WARNING


LIGHTART IS NOT LIABLE FOR DAMAGE DUE TO MISWIRING 0-10 VOLT CONTROL WIRES, OR LOW VOLTAGE LED WIRES TO LINE VOLTAGE.

- 1 Feed the multi-wire white power cord from the fixture through the strain relief on dress plate.
- 2 Tighten set screw on strain relief to secure power cord.
- 3 Connect the WHITE (Input ACN) power supply wire to the WHITE (ACN) wire of the supply circuit. Connect the BLACK (Input ACL) power supply wire to the BLACK (ACL) wire of the supply circuit. Connect GREEN (GROUND) power supply wire to the GROUND wire of the supply circuit.
- 4 Connect the PURPLE (DIMMING +) power supply wire to the DIMMING + wire of the supply circuit. Connect the GRAY (DIMMING -) power supply wire to the DIMMING - wire of the supply circuit.
- 5 Push all line voltage connections and all excess wires into the junction box.
- 6 Secure canopy to junction box with provided fasteners.

Wiring Diagram *EM battery*

For illustration purposes only. Consult control manufacturer's spec. sheets for specific wiring requirements and fixture capacity.

-  INPUT AC LINE (BLACK)
-  INPUT GROUND (GREEN)
-  INPUT AC NEUTRAL (WHITE)
-  INPUT 0-10V DC DIM + POSITIVE (PURPLE)
-  INPUT 0-10V DC DIM - NEGATIVE (PINK)
-  SWITCH LINE (RED/WHITE STRIP) *(OPTIONAL)

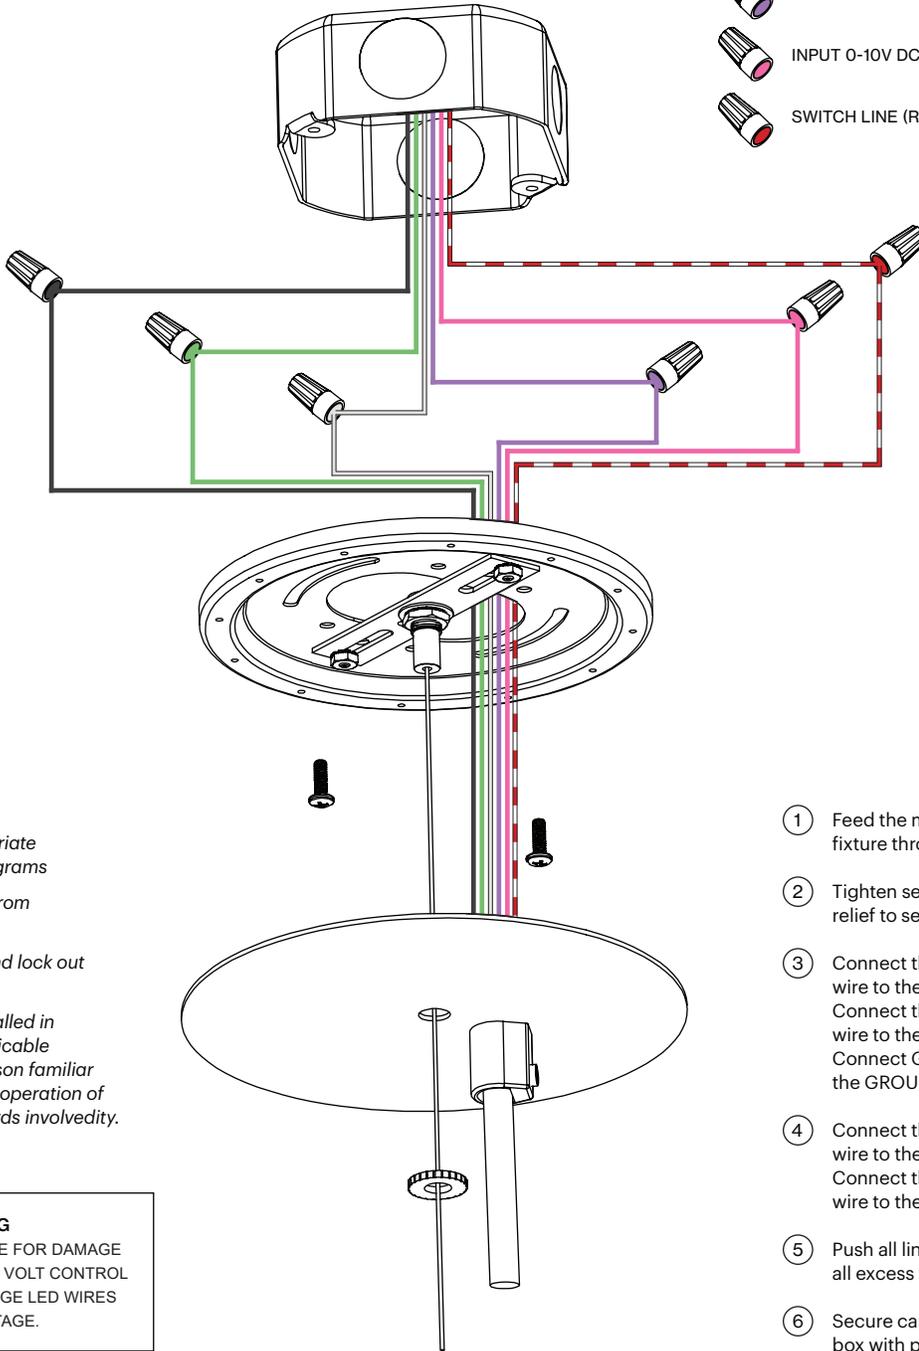

NOTICE

Wire according to appropriate manufacturers wiring diagrams

WARNING: Risk of shock from energized equipment.

Always turn power OFF and lock out during fixture installation

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

WARNING


LIGHTART IS NOT LIABLE FOR DAMAGE DUE TO MISWIRING 0-10 VOLT CONTROL WIRES, OR LOW VOLTAGE LED WIRES TO LINE VOLTAGE.

- 1 Feed the multi-wire white power cord from the fixture through the strain relief on dress plate.
- 2 Tighten set screw on strain relief to secure power cord.
- 3 Connect the WHITE (Input ACN) power supply wire to the WHITE (ACN) wire of the supply circuit. Connect the BLACK (Input ACL) power supply wire to the BLACK (ACL) wire of the supply circuit. Connect GREEN (GROUND) power supply wire to the GROUND wire of the supply circuit.
- 4 Connect the PURPLE (DIMMING +) power supply wire to the DIMMING + wire of the supply circuit. Connect the GRAY (DIMMING -) power supply wire to the DIMMING - wire of the supply circuit.
- 5 Push all line voltage connections and all excess wires into the junction box.
- 6 Secure canopy to junction box with provided fasteners.

Wiring Diagram *EM Battery*

For illustration purposes only. Consult control manufacturer's spec. sheets for specific wiring requirements and fixture capacity.

-  INPUT AC LINE (BLACK)
-  INPUT GROUND (GREEN)
-  INPUT AC NEUTRAL (WHITE)
-  INPUT 0-10V DC DIM + POSITIVE (PURPLE)
-  INPUT 0-10V DC DIM - NEGATIVE (PINK)
-  SWITCH LINE (RED/WHITE STRIP) *(OPTIONAL)

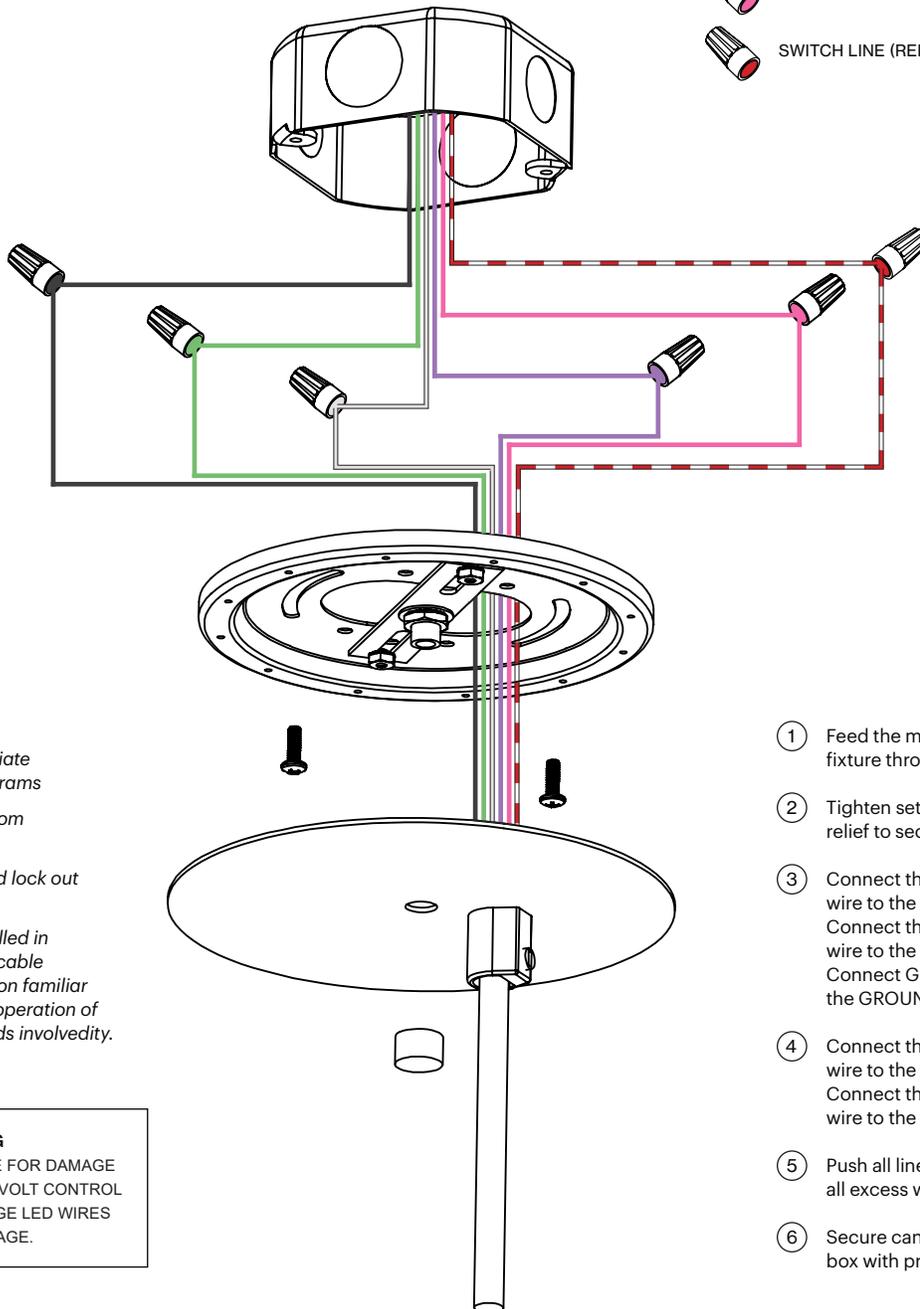

NOTICE

Wire according to appropriate manufacturers wiring diagrams

WARNING: Risk of shock from energized equipment.

Always turn power OFF and lock out during fixture installation

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


WARNING

LIGHTART IS NOT LIABLE FOR DAMAGE DUE TO MISWIRING 0-10 VOLT CONTROL WIRES, OR LOW VOLTAGE LED WIRES TO LINE VOLTAGE.

- ① Feed the multi-wire white power cord from the fixture through the strain relief on dress plate.
- ② Tighten set screw on strain relief to secure power cord.
- ③ Connect the WHITE (Input ACN) power supply wire to the WHITE (ACN) wire of the supply circuit. Connect the BLACK (Input ACL) power supply wire to the BLACK (ACL) wire of the supply circuit. Connect GREEN (GROUND) power supply wire to the GROUND wire of the supply circuit.
- ④ Connect the PURPLE (DIMMING +) power supply wire to the DIMMING + wire of the supply circuit. Connect the GRAY (DIMMING -) power supply wire to the DIMMING - wire of the supply circuit.
- ⑤ Push all line voltage connections and all excess wires into the junction box.
- ⑥ Secure canopy to junction box with provided fasteners.

Wiring Diagram EM Battery


For illustration purposes only. Consult control manufacturer's spec. sheets for specific wiring requirements and fixture capacity.

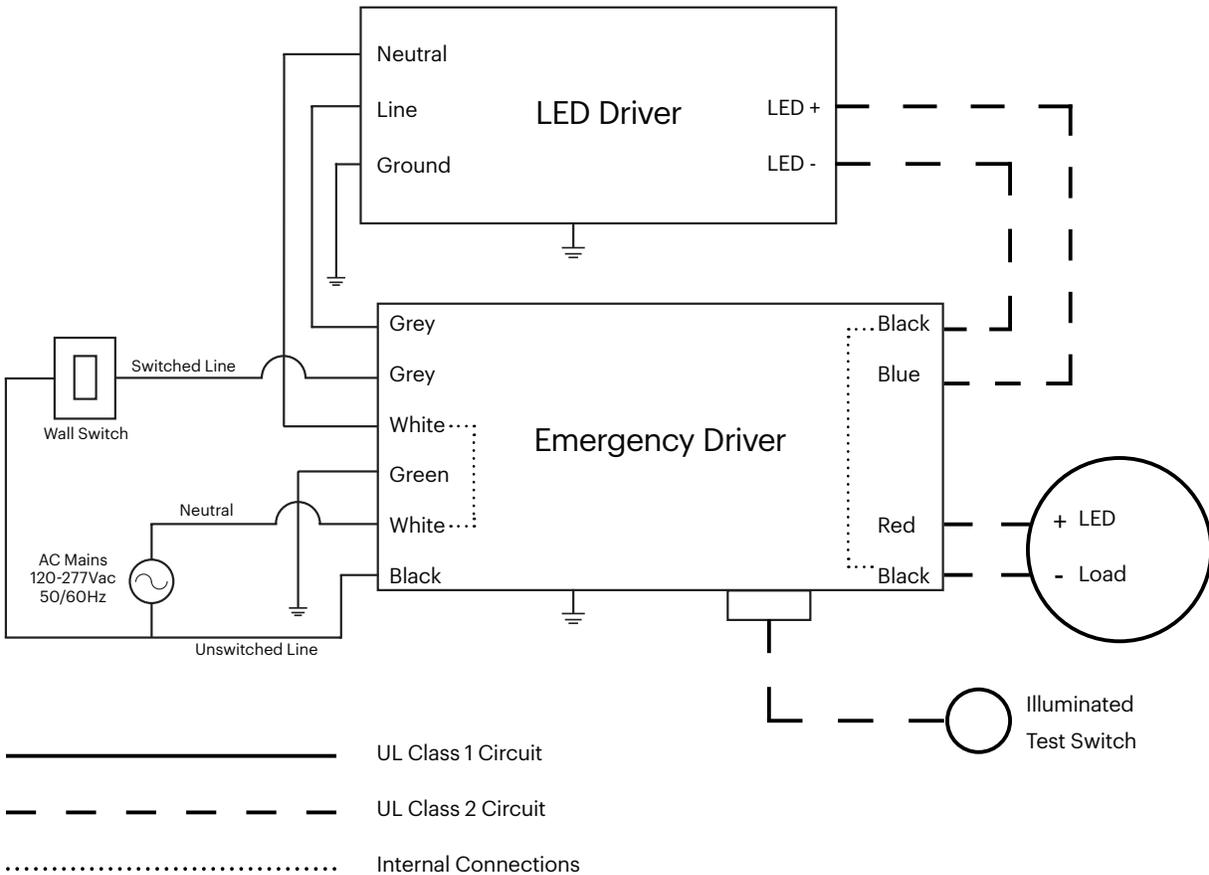

WARNING
 LIGHTART IS NOT LIABLE FOR DAMAGE
 DUE TO MISWIRING 0-10 VOLT CONTROL
 WIRES, OR LOW VOLTAGE LED WIRES
 TO LINE VOLTAGE.

Parts Overview

* Contact LightArt for alternative installation

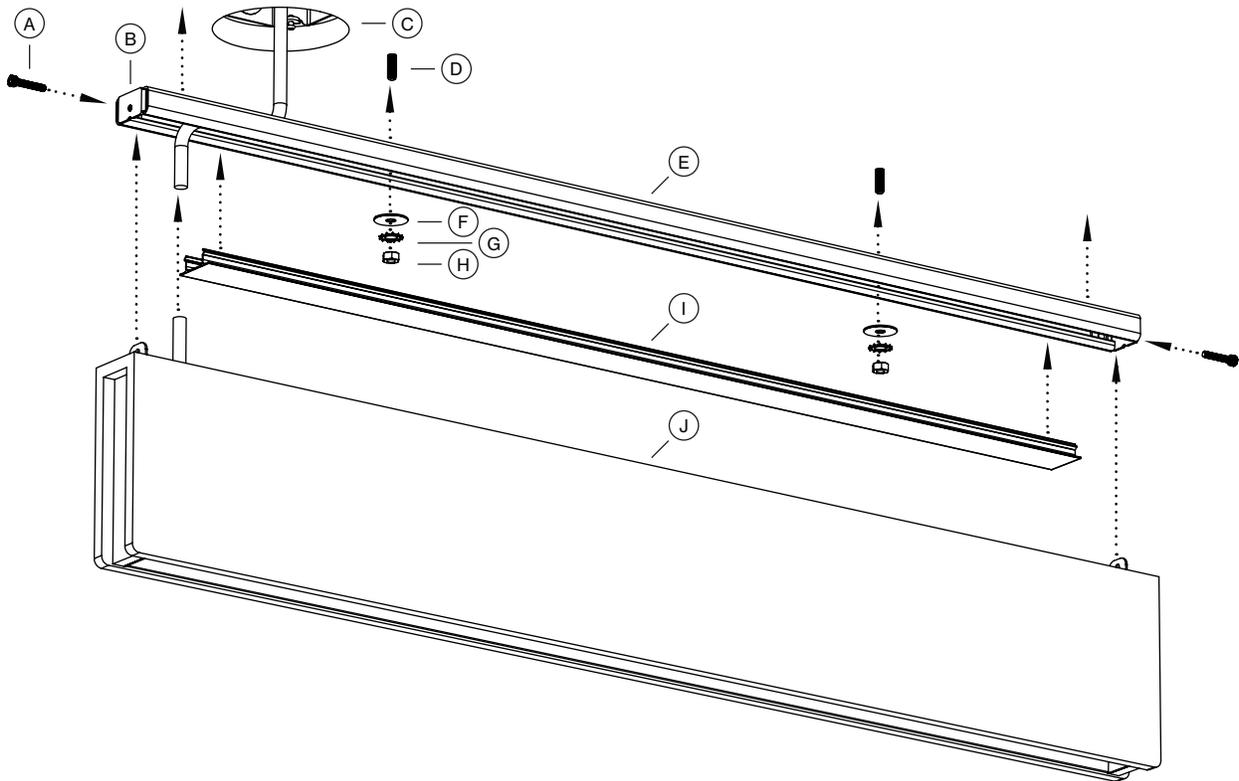

***PROVIDED BY US**




- Ⓐ SET SCREW (×2)
- Ⓑ END CAP (×2)
- Ⓙ FIXTURE (×1)

***PROVIDED BY OTHERS**

- Ⓒ JUNCTION BOX (×1)
- Ⓓ ALL-THREAD (×2)
- Ⓔ STRUT (×1)
- Ⓕ WASHER (×2)
- Ⓖ LOCK WASHER (×2)
- Ⓗ NUT (×2)
- Ⓜ CHANNEL COVER (×1)

Step-by-step


- ① We do not supply the struts. They are provided by others. Be sure to purchase the size shown.
- ② We do not supply the channel cover. They are provided by others. Be sure to purchase the size shown.
- ③ Cut the strut and channel cover to length. The length varies depending on which fixture you are installing.

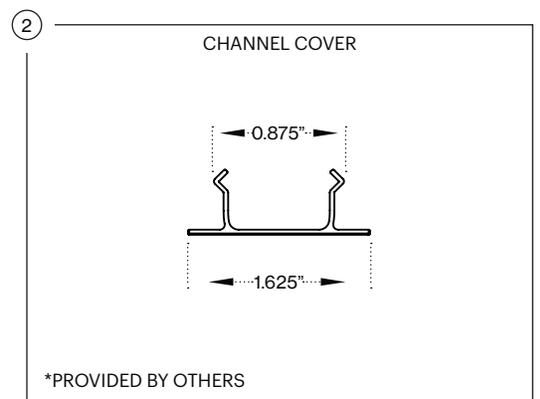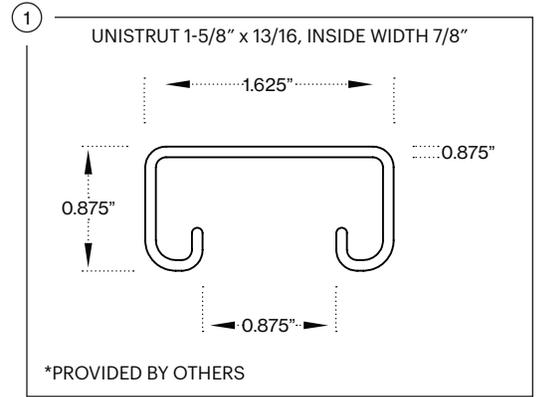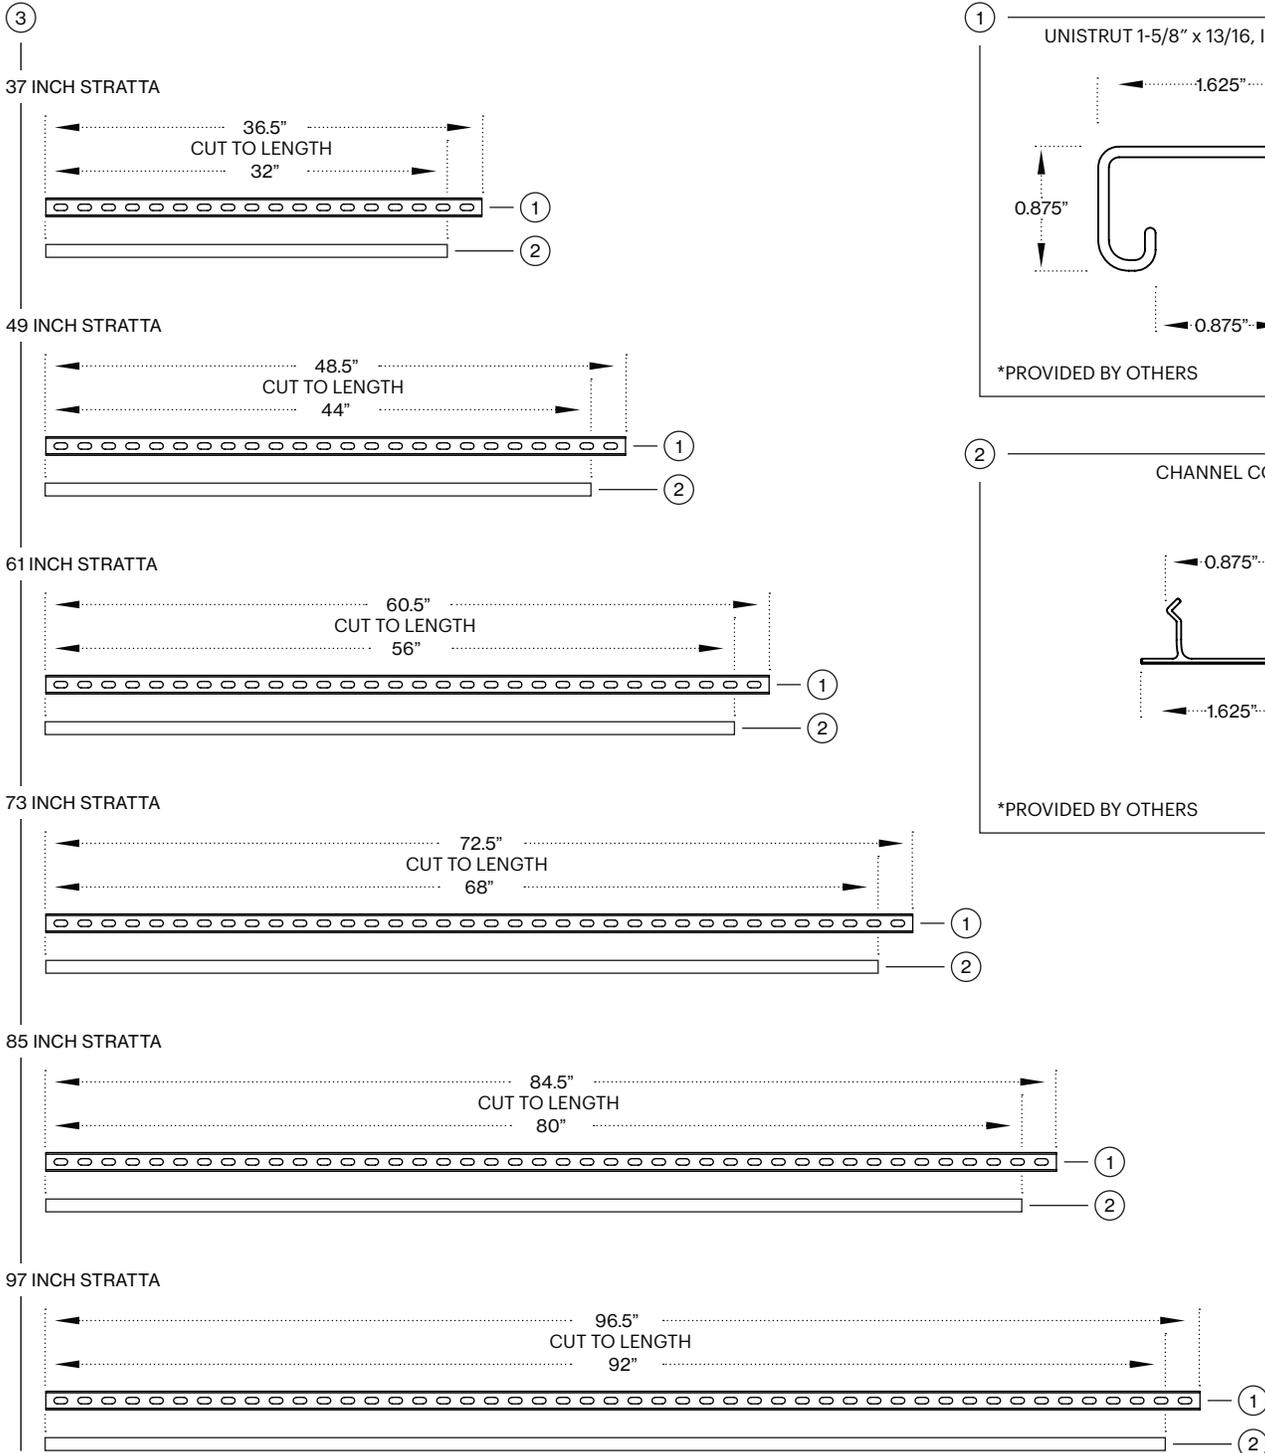

Step-by-step


- ① Align the end piece with the end of the strut. The notch should be facing down, towards the open cavity.

*PROVIDED BY US




①

*PROVIDED BY OTHERS

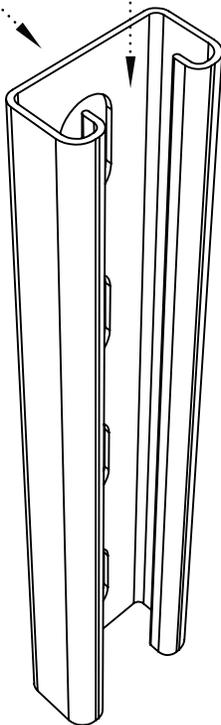


- ② Insert the end piece by hand, then hammer it into place with a rubber mallet. Repeat steps 1 and 2 for the other end of the strut.

②

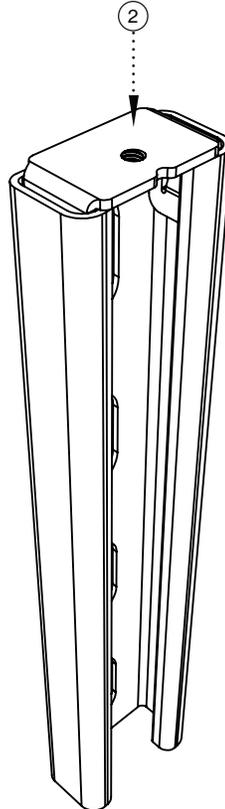


- ③ Ensure the end piece is inserted all the way. Also confirm that the notch is facing down, towards the side of the strut that is open.

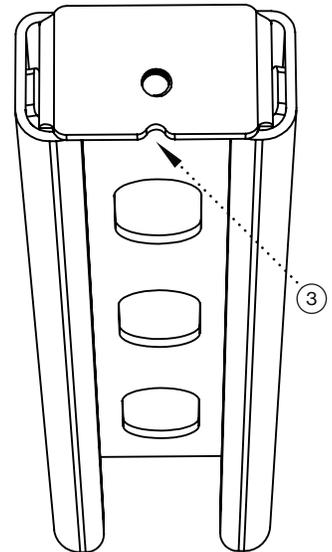


Step-by-step


- ① Install strut assembly. Refer to project-specific shop drawings provided by LightArt for exact locations.

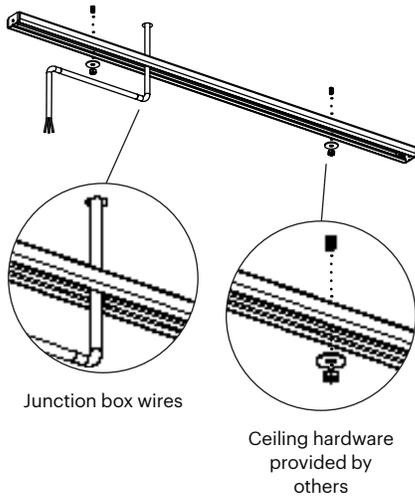


- ② Wiring: See wiring instructions and diagrams on the last few pages for additional details.

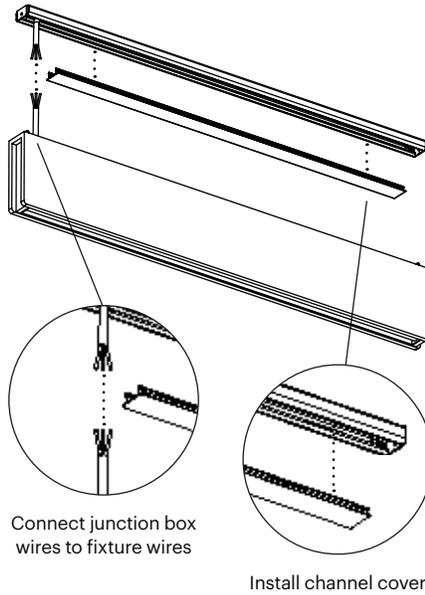

- ③ Push the connections and all excess wires into strut cavity.

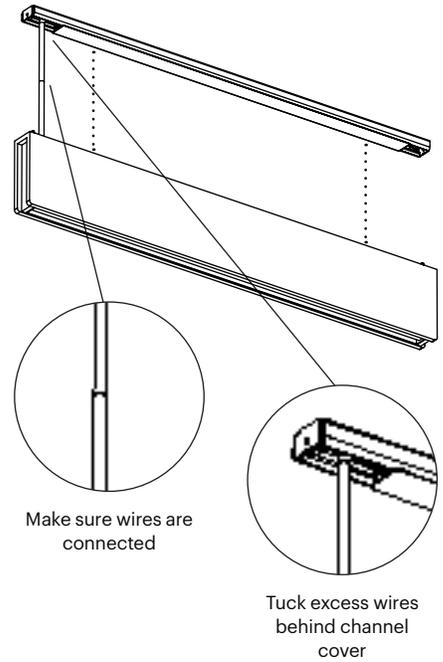

- ④ While holding the fixture in place install a screw on both sides. Make sure the screw intersects the holes on the fixture.

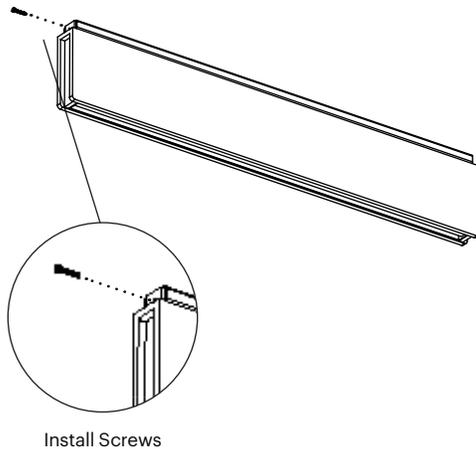

- ⑤ Confirm that the fixture is properly installed before letting go of fixture.

