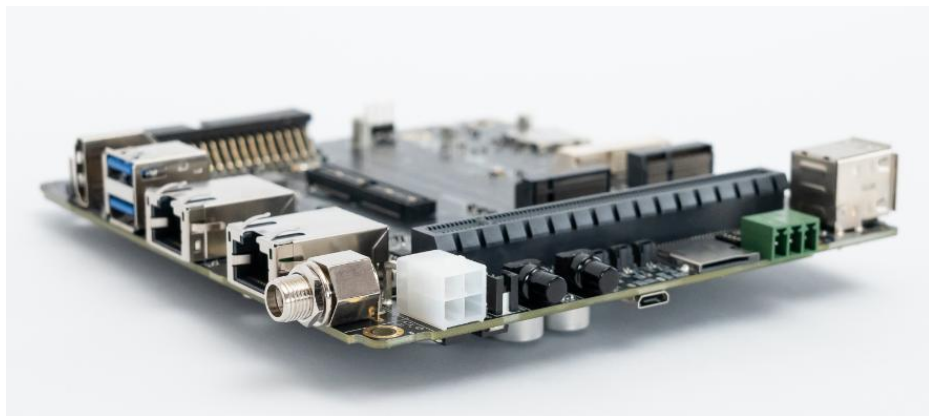


AVerMedia D315 series

Applies to NVIDIA® Jetson AGX Orin 32G/64G module



AVerMedia Technologies, Inc.

No. 135, Jian 1st Rd., Zhonghe Dist., New Taipei City 23585, Taiwan

Tel: 886-2-2226-3630

Fax: 886-2-3234-4842

Sales and Marketing: [Contact](#)

Technical Support: [Professional User](#)

Table of Contents

Preface	3
Revision History	4
1.0 Introduction	9
1.1 Product Specifications	10
1.2 Product Overview	12
1.2.1 D315 Box PC Compatible Cards	12
1.2.2 Block Diagram	13
1.2.3 Front View and Back View of Carrier board	14
1.3 Connector Summary	15
1.4 Carrier Board Interface	16
2.0 Feature Description	19
2.1 Jetson module Connector	19
2.2 Fan Power connector	19
2.3 RTC Battery Connector	20
2.4 HDMI OUTPUT	20
2.5 USB 3.2 Gen 2 Type-A Connector #1 , #2	20
2.6 M.2 E key 2230	21
2.7 M.2 M key 2280	21
2.8 USB 2.0 Micro B Connector	21
2.9 Micro SD Card Slot	22
2.10 10 Gigabit Ethernet Connector(Original)	22
2.11 40-Pin expansion header	24
2.12 Audio pin header	26

2.13 Gigabit Ethernet Connector(Original)	26
2.14 Micro SIM Card Socket	28
2.15 Mini card socket	28
2.16 OOB board connector	29
2.17 DC POWER JACK	30
2.18 ATX 4P	30
2.19 USB 2.0 Gen 1 Type-A Connector #1 , #2	31
2.20 12V power connector for daughter board	31
2.21 PCIE x16 socket	32
2.22 Board to board connector (to Camera board)	32
2.23 CAN Bus 3-pin terminal block with transceiver	33
2.24 Debug port	33
2.25 Switch Button	34
2.26 Power & Recovery Button	34
2.27 Switch Button	35
3.0 Installation	36
3.1 BSP Setup Instructions	36
4.0 Software	37
5.0 Force Recovery Mode	41
6.0 Power Consumption	42
7.0 Accessory Drawings	43
7.1 Fan Module/ Adapter/ Power Cord (Original)	43
Fan Module/ Adapter/ Power Cord (PCN20230906-1)	44
8.0 D315AOP (2D Drawing)	50

Preface

Disclaimer

The information contained in this user manual, including but not limited to any product specification is subject to change without notice. AVerMedia assumes no liability for any damages incurred directly or indirectly from any technical or typographical errors or omissions contained herein or for discrepancies between the product and the user manual.

Technical Support

If you experience the difficulty after reading this manual and/or using the product, please contact the reseller from which you purchased the product. In most cases, the reseller can help you with the product installation and the difficulty you encountered.

In case the reseller is not able to resolve your problem, our highly capable global technical support team can certainly assist you. Our technical support section is available 24 hours a day and 7 days a week through our website, with the [click here](#). For more contact information, you may find it in the section of AVerMedia Global Offices.

Contact Enquiry

For more information of our products, pricing, and order placement, please fill in our inquiry form [here](#), we will contact you within 24 hours.

Download User Manual

Please click the link [here](#) to download the file of this user manual from AVerMedia website.

Revision History

Revision	Date	Updates
V0.1	Sep 29, 2022	1 st Released
V0.2	Nov 08, 2022	Updated specification
V0.3	Nov 29, 2022	Updated specification/ 1.4 Carrier Board Interface/ update power consumption/ Feature Description
V0.4	Jan 09, 2022	Updated 2.23 CAN Bus 3-pin terminal
V0.5	June 19, 2023	Updated 2.18 ATX 4pin 3.0 Installation
V1.0	Aug 11, 2023	Updated 1.1 Specification 6.0 Power consumption
V1.1	Sep 08, 2023	Updated 1.2 Specification-add 40pin details
V1.2	Oct 26, 2023	Updated 1.0Introduction → add on D315AOP 1.1Temperature/Dimensions →add on D315AOP 1.1Expansion Header 1x mPCIe updated 1.1Thermal Solution updated 6.0 Power Consumption → add on D315AOP-32G/64G Page.45-46 → add on D315AOP 2D drawing
V1.3	Dec 27, 2023	Updated 2.27 Switch Button pinout setting
V1.4	Feb 17, 2024	Updated 1.4 Carrier Board Interface
V1.5	Apr 12, 2024	Updated P.12 Waring of Capture card assembly/installation
V1.6	Jun 12, 2024	Updated P.22 & P.26 add RJ45 connector 2nd source, P.43 & P.44 Thermal module 2 nd source.
V1.7	Aug 22, 2024	Updated P.25~26 40 pin PCB version
V1.8	Sep. 12, 2025	Modify Product Warranty

AVerMedia Global Offices

<https://www.avermedia.com/professional/contact>

Headquarters

Taiwan Office

No. 135, Jian 1st Rd., Zhonghe Dist., New
Taipei City 23585, Taiwan

Tel:  +886-2-2226-3630

Fax: +886-2-3234-4842

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

The Americas

USA Office

4038 Clipper Court Fremont, CA 94538

Tel:  (510) 403-0006

Fax: (510) 403-0022

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Brazil Office

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Latin America Office

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Europe

Head Office EU

AVT Solutions GmbH

Hanauer Landstrasse 291 B 60314

Frankfurt Hessen

Germany

 technicalsupport_120

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Russia Office

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Professional Solutions Support Tel:

 +7 (925) 834-0310

Spain Office

AVerMedia Europe Group

Ronda de Poniente no. 4 segundo H

28760 Tres cantos, Madrid

Spain:

 technicalsupport_120

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Asia-Pacific

China Office

Room 1510, No.488, Hitech Plaza, South

Wuning Rd., Jingan District, Shanghai,

China

Tel:  +86-021-5298 7985

Fax: +86-021-5298 7981

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Japan Office

6F, Kojimachi Syuei Bldg. 4-3-13 Kudan-

minami, Chiyoda-ku, Tokyo, 102-0074,

Japan

Sales & Marketing: [Contact](#)

Technical Support: [Home users](#) /

[Professional users](#)

Product Warranty

Please refer to [Support | Warranty And Rma Services | AVerMedia](#)

Copyright Notice

The information contained in this document is subject to change without notice. AVerMedia shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, performance, or use of this material. This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent by AVerMedia.

Trademark Acknowledgement

AVerMedia acknowledges all the trademarks, registered trademarks, and/or copyrights referred to in this document as the property of their respective owners. Not listing all possible trademarks or copyright acknowledgments does not constitute the lack of acknowledgment to the rightful owners of the trademarks and copyrights mentioned in this document.

ESD Warning

Electronic components and circuits are sensitive to Electrostatic Discharge (ESD). When handling any circuit board assemblies including AVerMedia products, it is highly recommended that ESD safety precautions can be observed. ESD safe best practices can include, but are not limited to the following ones.

1. Leave the circuit board in the antistatic package until it is ready to be installed.
2. Use a grounded wrist strap when handling the circuit board. At a minimum, you need to touch a grounded metal object to dissipate any static charge, which may be present on you.
3. Avoid handling the circuit board in the carpeted areas.
4. Handle the board by the edges and avoid the contact with the components.
5. Only handle the circuit boards in ESD safe areas, which may include ESD floor and/or table mats, wrist strap stations, and ESD safe lab coats.

Safety Precaution:

1. All cautions and warnings on the device should be noted.
2. For safety consideration, do NOT open the device if not a qualified service staff.
3. Place the device on a solid surface during installation to prevent falls.
4. Keep the device away from humidity.
5. Do NOT leave this device in an un-controlled environment with temperatures beyond the device's permitted storage temperature to avoid damage.
6. All adaptors and cables supplied by AVerMedia are verified. Do NOT use any others not supplied by AVerMedia to avoid any malfunction or fires.
7. Make sure the power source matches the power rating of the device.
8. Place the power cord where people cannot step on it. Do not put anything on the power cord.
9. Always completely disconnect the power while the device is not usage or idle for a long time.
10. Disconnect the device from any AC supply before cleaning. While cleaning, use a damp cloth instead of liquid or spray detergents.
11. Make sure the device is installed near a power outlet and easy for accessible.
12. Do not cover the openings on the device to ensure optimal heat dissipation.
13. Watch out the heatsink or heat spreader of the device when the system is running.
14. Never pour any liquid into the openings. This could cause fire or electric shock.
15. The static electricity should be noted while installing any internal components. Consider to use a grounding wrist strap and put all electronic parts in static-shielded containers.

If the following situations occur, please contact our service personnel:

- (1) The device is dropped or damaged
- (2) Damaged power cord or plug
- (3) Exposure to moisture
- (4) Liquid intrusion into the device
- (5) Any obvious signs of damage displayed on the device
- (6) Device is not working as expected or in a manner as described in this manual

1.0 Introduction

AVerMedia AVerMedia D315/D315AO/D315AOB/D315AOP include fully featured carrier board which is all developed for NVIDIA® Jetson AGX Orin 32G/64G modules.

D315/D315AO/D315AOB/D315AOP provide multiple I/O include one HDMI video output, two USB 3.2 ports, one GbE, one 10G RJ-45 port, 40-pin expansion, one M.2 Key E, one M.2 key M.

Operating with NVIDIA® Jetson AGX Orin 32G/64G modules and the rich I/O functions, AVerMedia D315/D315AO/D315AOB/D315AOP is the perfect choice for high-end performance AI edge computing platform for intelligent video analytics applications.

1.1 Product Specifications

NVIDIA Jetson SoM	NVIDIA® Jetson AGX Orin™ module (32GB or 64GB)	
Networking	• 1x GbE RJ-45 • 1x 10G RJ-45 • 1x M.2 E key (for Wi-Fi 6E)	
Display Output	1x HDMI output	
Temperature	Operating temperature: D315: -25°C~85°C D315AO:-25°C~70°C D315AOB:-25°C~65°C D315AOP 32G: -25°C ~50°C D315AOP 64G: -25°C ~40°C Storage temperature -40°C ~ 85°C Relative humidity 40 °C @ 95%, Non-Condensing	
MIPI & SerDes Camera (120-pin)	GMSL2/FPD-link III/V-by-One® HS (STURDeCAM20 optional)	
USB	• 1x USB 2.0 Micro-B for recovery • 2x USB 2.0 Type-A • 2x USB 3.2 Type-A	
Audio	Intel HD Audio analog connector	
Storage	1x micro-SD card slot	
Expansion Header	• 40-pin (1x UART, 1x SPI, 1x CAN, 2x I2C, 1x I2S, 5x GPIOs) • 16. 1x M.2 M key (for SSD or AVerMedia capture card: CN311-H, CN312SW, CN312MW) • 1x Micro SIM socket • 1x mPCIe (for 4G LTE module or 5G module via adapter card) (D315AOP doesn't support 1x mPICE feature.) • 1x PCIe x16 (reserved, expansion for daughter board use, only support x8 PCIe lane) • 1x CAN bus with transceiver • 120-pin (expansion for MIPI SerDes daughter board use) • OOB support	
Power requirement	Voltage	DC 12~54V
	Current	DC IN Jack on board: 7A Max
		ATX 4pin: 10.8A Max
Power Cord	US/JP/EU/UK/TW/AU/CN	
Thermal Solution	• D315 Heat sink with fan (optional) • D315AOB Heat sink with fan • D315AOP Heat sink with fanless	
Buttons	Power and Recovery	
RTC Battery	Support RTC Battery and Battery Life Monitoring by MCU	

Dimensions	• D315: 141.5mm (W) x 133.5mm (L) x 29mm (H), weight:200g • D315AO: 141.5mm(W) x 133.5mm(L) x 63mm(H) , weight: 720g • D315AOB: 181.5mm (W) x 137mm (L) x 88mm (H) (with mounting hole) , weight: 1.5kg • D315AOP: 160mm(W)*136.9(L)*65mm(H), weight: 1.6kg
Certifications	CE, FCC, KC


1.2 Product Overview

1.2.1 D315 Box PC Compatible Cards



Warning: Capture card assembly/installation into D315 Box PC should only be performed by AVerMedia to avoid damage and warranty void.

Model Name	CN311-H	CN312SW	CN312MW
Host Interface	M.2 M key 2280	M.2 M key 2280	M.2 M key 2280
Max Input Resolution	4096x2160 30fps	2048x1080 60fps	● 2Kp60 in (SDI) ● 1920 x 1200p60 in (HDMI)
Max Record Resolution	4096x2160 30fps	1920x1080 60fps	1920x1080 60fps
Channel No.	1	2	2
Audio Interface	HDMI embedded	SDI embedded	SDI embedded HDMI embedded
Video Interface	HDMI	SDI	HDMI SDI
Color Depth/Precision	8/10 bit	8 bit	8 bit
Color Format	YUY2, YUYV	YUY2, YUYV	YUY2, YUYV
Operating Temperature	0°~40°C	-20°~70°C	-20°~70°C
Dimensions (LxW) mm	22x80	22x80	22x80

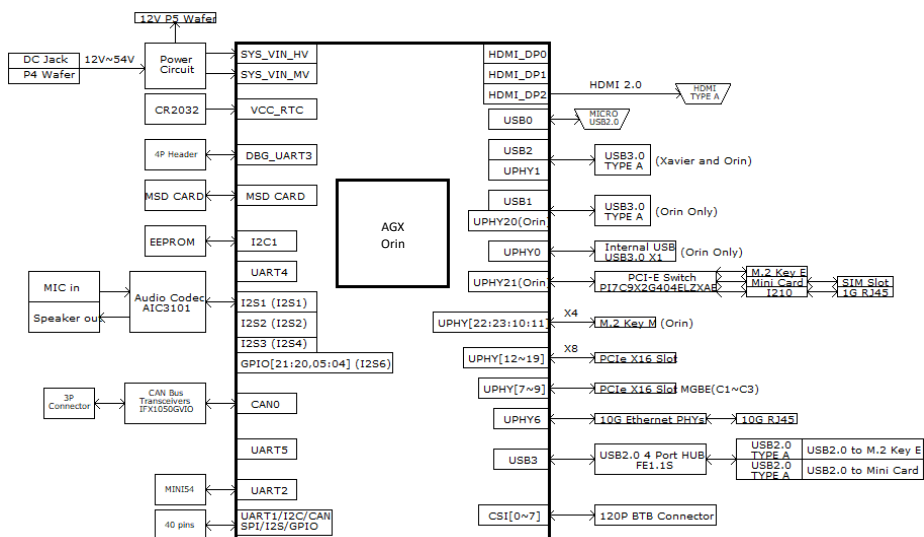1.2.2 Block Diagram



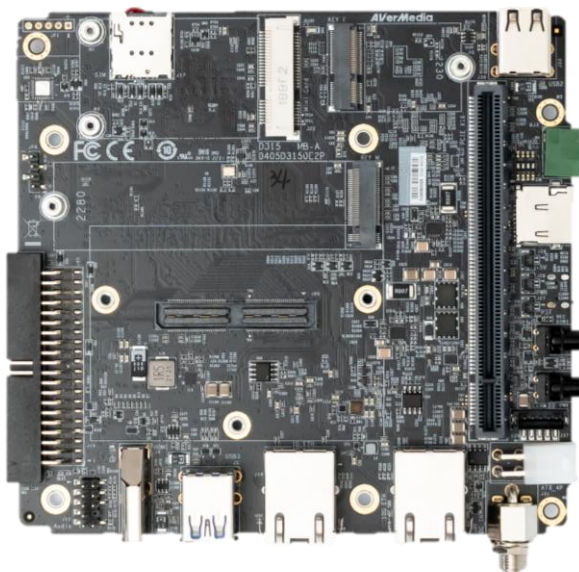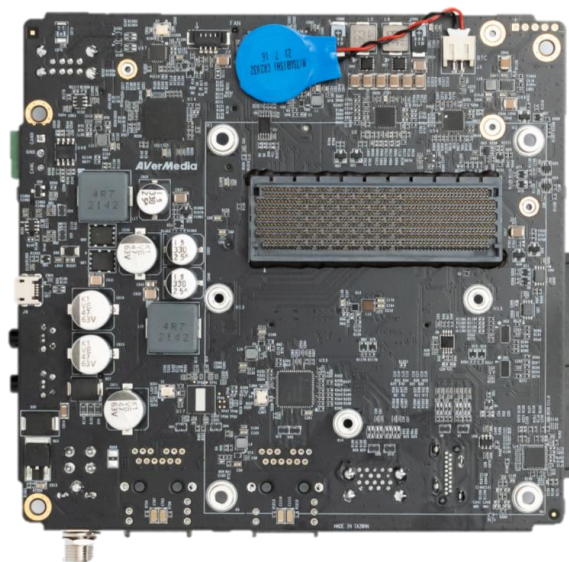1.2.3 Front View and Back View of Carrier board




1.3 Connector Summary

J1	699-pin high-speed/high-density connector
J2	Fan Wafer
J3	External RTC Battery wafer
J4	HDMI output Type-A Vertical Side Connector (Female)
J5	USB 3.2 Gen2 Dual Port Type A Connector
J6	M.2 E-Key Socket
J7	M.2 M-Key Socket
J8	USB 2.0 Micro B Connector
J9	Micro SD Card Socket (Push-Push)
J13	10 Gigabit Ethernet Connector w/LEDs
J14	40-pin Expansion
J15	Audio 9-pin header
J16	Gigabit Ethernet Connector w/LEDs
J17	Micro SIM card socket (Push-Push)
J22	Mini card socket
J26	OOB board connector (5V)
J27	OOB board connector (Reset)
J28	OOB board connector (Power)
J30	DC power Jack with Lock
J31	Input Power – 4.2mm Pitch 90° ATX Power 4P
J33	USB 2.0 Gen1 Dual Port Type A Connector
J37	DC 12V connector for daughter board
J38	PCIE x16 socket
J60	120-pin high speed board to board connector (to Camera board)
BJ3	CAN bus 3-pin terminal block with transceiver

1.4 Carrier Board Interface


Top View Interface

J1	699-pin high-speed/high-density connector
J2	Fan Wafer
J3	External RTC Battery wafer
J8	USB 2.0 Micro B Connector

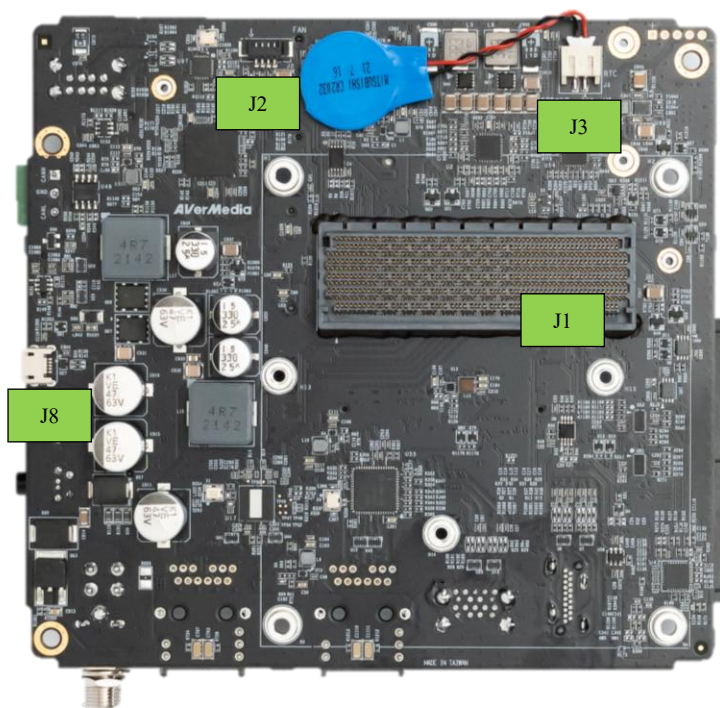


Bottom View Interface

J4	HDMI output Type-A Vertical Side Connector (Female)
J5	USB 3.2 Gen2 Dual Port Type A Connector
J6	M.2 E-Key Socket
J7	M.2 M-Key Socket
J9	Micro SD Card Socket (Push-Push)
J13	10 Gigabit Ethernet Connector w/LEDs
J14	40-pin Expansion
J15	Audio 9pin header
J16	Gigabit Ethernet Connector w/LEDs
J17	Micro SIM card socket (Push-Push)
J22	Mini card socket
J26	OOB board connector (5V)
J27	OOB board connector (Reset)
J28	OOB board connector (Power)
J30	54V DC power Jack with Lock

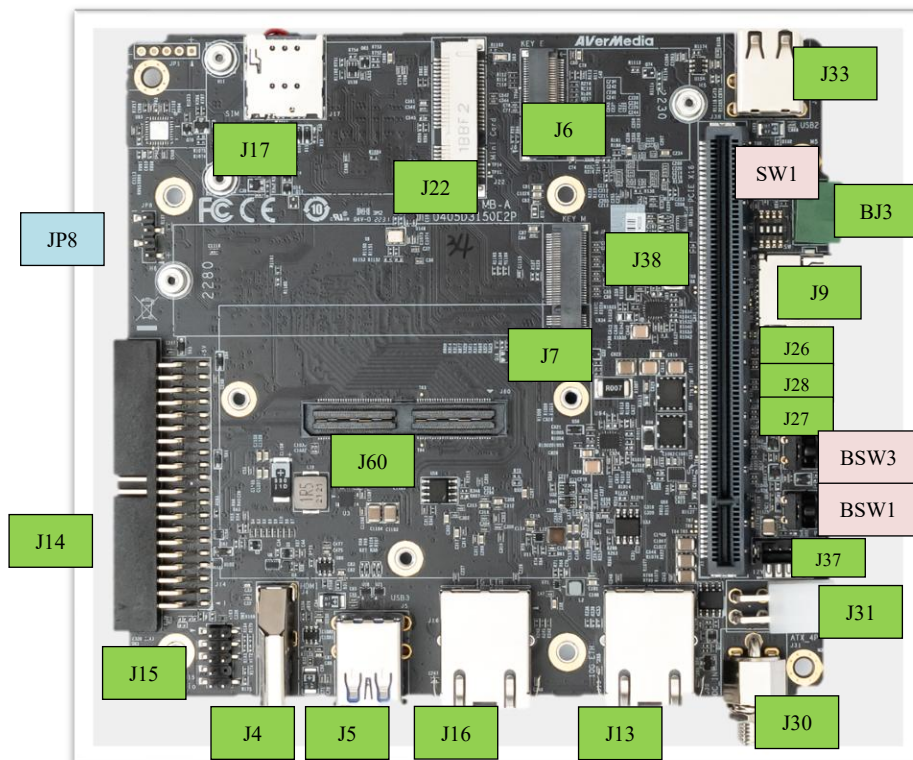

J31	Input Power – 4.2mm Pitch 90° ATX Power 4P
J33	USB 2.0 Gen1 Dual Port Type A Connector
J37	12V Power input for sub board
J38	PCIE X16 connector
J60	2x60 pin high speed board to board connector (to Camera board)
BJ3	CAN bus 3-pin terminal block with transceiver
JP8	Debug port
SW1	Switch Button
BSW1	Power Button w/LEDs
BSW3	Recovery Button w/LEDs

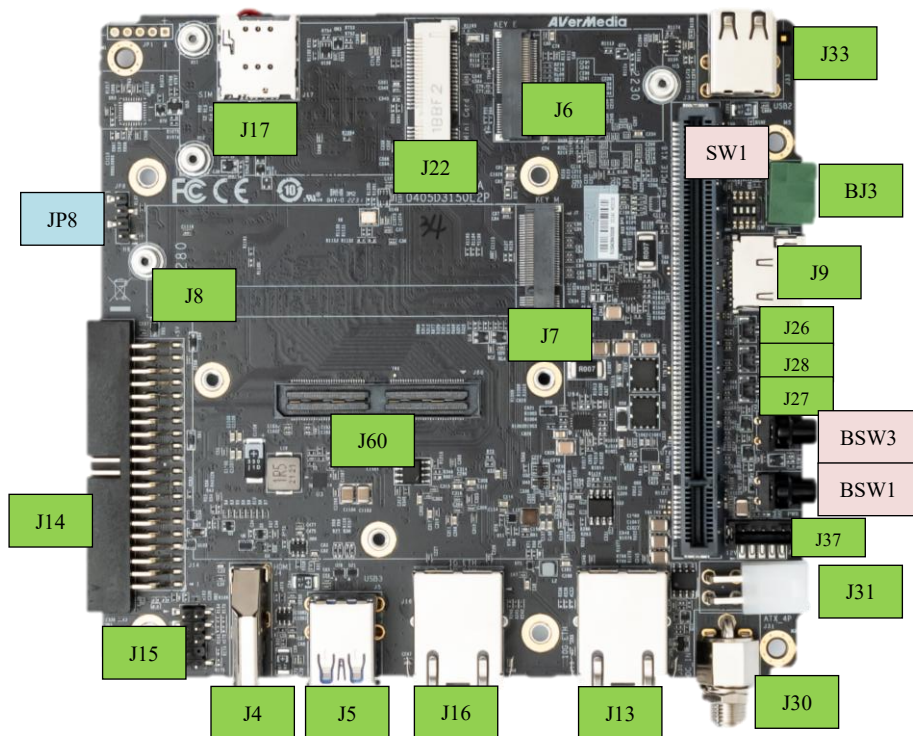

2.0 Feature Description


2.1 Jetson module Connector


Function	Provide connection with NVIDIA® Jetson™ AGX Xavier™ module	
Location	J1	
Type Description	MOLEX 699pin socket	
Manufacturer and Part Number	MOLEX,203456-0003	
Mating Connector	MOLEX,203456-0003	
Pinout	Please refer to NVIDIA Jetson™ AGX Orin™ and AGX Orin™ System-on-Module datasheet for pinout details.	
Remarks	https://developer.nvidia.com/embedded/downloads	

2.2 Fan Power connector

Function	Fan Power Connector			
Location	J2			
Type Description	WAFER_1*4PIN_1.25 mm_90°			
Manufacturer and Part Number	ACES 50271-0040N-001_BLACK			
Mating Connector	ACES 50276-004H0H0-001			
Pinout	Pin #	Description		
	PIN 1	GND		
	PIN 2	+12V Power		
	PIN 3	FAN_TACH		
	PIN 4	FAN_PWM		
Remarks	None			

2.3 RTC Battery Connector

Function	RTC battery for module			
Location	J3			
Type Description	2.0mm wire-to-board header 02P type			
Manufacturer and Part Number	Pinrex, 721-94-02TWR9			
Mating Connector	Tyu, TU2001HNO-02			
Pinout	Pin #	Description		
	PIN1	3V Power		
	PIN2	GND		
Remarks	RTC Battery:, CR2032 3V			



2.4 HDMI OUTPUT

Function	HDMI output connector		
Location	J4		
Type Description	HDMI Type-A female connector		
Manufacturer and Part Number	捷湧 EDL TECHNOLOGY CO. HM-FVD480B		
Mating Connector	Any HDMI standard Type-A interface cable or device.		
Pinout	Please refer to HDMI standard.		
Remarks	None		



2.5 USB 3.2 Gen 2 Type-A Connector #1 , #2

Function	USB 3.2 Gen 2 Type-A connector #1 #2		
Location	J5		
Type Description	Dual-port USB 3.2 Gen 2 Type-A female connector		
Manufacturer and Part Number	冠泰 Champway CU3B-AFR15U-096H		
Mating Connector	Any USB 3.2 Gen 2 standard Type-A interface cable or device.		
Pinout	Please refer to USB 3.2 Gen 2 standard.		



Remarks	None	
2.6 M.2 E key 2230		
Function	M.2 E key	
Location	J6	
Type Description	SOCKET_M.2-KEY E_75PIN_90°_SMD	
Manufacturer and Part Number	宏致_ACES 51748-07502-005 P0.5 mm-H8.5 mm	
Mating Connector	Any M.2 E key 2230 card standard interface device.	
Pinout	Please refer to M.2 E key card standard for the pinout details.	
Remarks	None	

2.7 M.2 M key 2280

Function	M.2 M key	
Location	J7	
Type Description	SOCKET_M.2-KEY M_75PIN_90°_SMD	
Manufacturer and Part Number	宏致_ACES 51757-0750C-012_P0.5 mm-H5.5 mm	
Mating Connector	Any M.2 M key 2280 card standard interface device.	
Pinout	Please refer to M.2 M key card standard for the pinout details.	
Remarks	None	

2.8 USB 2.0 Micro B Connector

Function	BSP Installation as recovery mode	
Location	J8	
Type Description	USB micro-type B female connector	
Manufacturer and Part Number	福軒 Fullglory FG-MCB-111440	
Mating Connector	Any USB standard Micro-type interface cable or device.	

Pinout	Please refer to USB Micro-type standard.	
Remarks	None	

2.9 Micro SD Card Slot
















Function	Micro SD Card	
Location	J9	
Type Description	SOCKET_MICRO SD CARD_9PIN_90°_SMD	
Manufacturer and Part Number	福軒 Fullglory FG-0011BAAS09A	
Pinout	Refer to MicroSD card standard	
Remark	Push-Push	

2.10 10 Gigabit Ethernet Connector(Original)

Function	10 Gb single-port Ethernet connector, used to connect to the host system.	
Location	J13	
Type Description	RJ45 with integrated magnetics	
Manufacturer and Part Number	志展 Compupack(CPC) ACNRJJA0001-006 10G-LEFT(G/Y)+RIGHT(Y)-UP	
Mating Connector	Any standard 10Gb Ethernet mating connector can be applicable.	
Pinout	Comply with Ethernet standards.	
Remarks	None	

10 Gigabit Ethernet Connector(PCN20240528-1)

Function	10 Gb single-port Ethernet connector, used to connect to the host system.	
Location	J13	
Type	RJ45 with integrated magnetics	

Description																	
Manufacturer and Part Number	UDE 湧徳 S26-ZZ-0086 10G-LEFT(G/Y)+RIGHT(Y)-UP																
Mating Connector	Any standard 10Gb Ethernet mating connector can be applicable.																
Pinout	Comply with Ethernet standards.																
Remarks	<table><tr><th colspan="2">Table-1</th></tr><tr><th>Original (Compupack 志展)</th><th>New (UDE 湧徳)</th></tr><tr><th colspan="2">Top View in Carrier board</th></tr><tr><td></td><td></td></tr><tr><th colspan="2">Back View in Carrier board</th></tr><tr><td></td><td></td></tr><tr><th colspan="2">Front View in box PC</th></tr><tr><td></td><td></td></tr></table>	Table-1		Original (Compupack 志展)	New (UDE 湧徳)	Top View in Carrier board				Back View in Carrier board				Front View in box PC			
	Table-1																
	Original (Compupack 志展)	New (UDE 湧徳)															
	Top View in Carrier board																
																	
Back View in Carrier board																	
																	
Front View in box PC																	
																	

2.1140-Pin expansion header

2.1140-Pin expansion header

Function	General-purpose input/output				
Location	J14				
Type Description	HEADER_BOX_2*20PIN_2.54 mm _90°_SMD				
Manufacturer and Part Number	志展 Compupack(CPC) ACNBH420029-040				
Mating Connector	Any 2.54mm pitch standard interface female				


Pinout

[PCB Ver.A]



Sysfs GPIO	Connector Label	Pin	Pin	Connector Label	Sysfs GPIO
	3.3 VDC	40	39	5.0 VDC	
/dev/i2c-7	I2C_GP8_DAT	38	37	5.0 VDC	
	I2C_GP8_CLK	36	35	GND	
gpio454	MCLK05	34	33	UART1_TX	/dev/ttyTH50
	GND	32	31	UART1_RX	
SFIO (gpio460)	UART1_RTS	30	29	I2S2_CLK	gpio398
SFIO (gpio456)	PWM01	28	27	GND	
gpio433	GPIO27_PWM2	26	25	GPIO8_AO_DMIC_IN_DAT	gpio325
	3.3 VDC	24	23	GPIO35_PWM3	gpio391
gpio483	SPI1_MOSI	22	21	GND	
gpio482	SPI1_MISO	20	19	GPIO17_40HEADER	gpio444
gpio481	SPI1_SCK	18	17	SPI1_CS0	gpio484
	GND	16	15	SPI1_CS1	gpio485
/dev/i2c-1	I2C_GP2_DAT	14	13	I2C_GP2_CLK	/dev/i2c-1
CAN0	CAN0_RX	12	11	GND	
	CAN0_TX	10	9	GPIO9_CAN1_GPIO0	gpio324
gpio318	CAN1_DOUT	8	7	GND	
gpio401	I2S2_FS	6	5	UART1_CTS	SFIO (gpio461)
gpio319	CAN1_DIN	4	3	I2S2_SDIN	gpio400
	GND	2	1	I2S2_SDOUT	gpio399

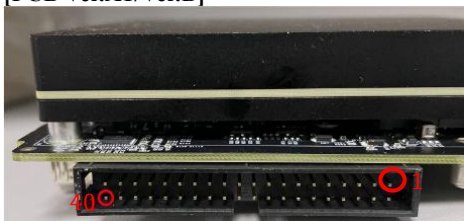[PCB Ver.A1/Ver.B]



Sysfs GPIO	Connector Label	Pin	Pin	Connector Label	Sysfs GPIO
	3.3 VDC	1	2	5.0 VDC	
/dev/i2c-7	I2C_GP8_DAT	3	4	5.0 VDC	
	I2C_GP8_CLK	5	6	GND	
gpio454	MCLK05	7	8	UART1_TX	/dev/ttyTHS0
	GND	9	10	UART1_RX	
SFIO (gpio460)	UART1_RT5	11	12	I2S2_CLK	gpio398
SFIO (gpio456)	PWM01	13	14	GND	
gpio433	GPIO27_PWM2	15	16	GPIO8_AO_DMIC_IN_DAT	gpio325
	3.3 VDC	17	18	GPIO35_PWM3	gpio391
gpio483	SPI1_MOSI	19	20	GND	
gpio482	SPI1_MISO	21	22	GPIO17_40HEADER	gpio444
gpio481	SPI1_SCK	23	24	SPI1_CS0	gpio484
	GND	25	26	SPI1_CS1	gpio485
CAN0	I2C_GP2_DAT	27	28	I2C_GP2_CLK	/dev/i2c-1
	CAN0_RX	29	30	GND	
	CAN0_TX	31	32	GPIO9_CAN1_GPIO0	gpio324
gpio318	CAN1_DOUT	33	34	GND	
gpio401	I2S2_FS	35	36	UART1_CTS	SFIO (gpio461)
gpio319	CAN1_DIN	37	38	I2S2_SDIN	gpio400
	GND	39	40	I2S2_SDOUT	gpio399

Note

None


2.12 Audio pin header

Function	Audio pin header.			
Location	J15			
Type Description	HEADER_PIN_2*5(-8)PIN_2.54 mm _180°_SMD			
Manufacturer and Part Number	頻銳 Pinrex 212-92-05GBER			
Mating Connector	Any 2.54mm pitch standard interface female			
Pinout	Definition	Pin No.	Pin No.	Definition
	MIC_L	1	2	GND
	MIC_R	3	4	NC
	Line Out (R)	5	6	NC
	NC	7	8	(No Pin)
	Line Out (L)	9	10	NC
Remarks	None			





















2.13 Gigabit Ethernet Connector(Original)

Function	1Gb single-port Ethernet connector, used to connect to the host system.			
Location	J16			
Type Description	RJ45 with integrated magnetics			
Manufacturer and Part Number	志展 Compupack(CPC) ACNRJGA0029-006 1G-LEFT(G/Y)+RIGHT(Y)-UP			
Mating Connector	Any standard 1Gb Ethernet mating connector can be applicable.			
Pinout	Comply with Ethernet standards.			
Remarks	None			



Gigabit Ethernet Connector(PCN20240528-1)

Function	1Gb single-port Ethernet connector, used to connect to the host system.															
Location	J16															
Type Description	RJ45 with integrated magnetics															
Manufacturer and Part Number	UDE 湧徳 S26-ZZ-0084 1G-LEFT(G/Y)+RIGHT(Y)-UP															
Mating Connector	Any standard 1Gb Ethernet mating connector can be applicable.															
Pinout	Comply with Ethernet standards.															
Remarks	Table-1															
	<table><tr><th>Original (Compupack 志展)</th><th>New (UDE 湧徳)</th></tr><tr><td colspan="2">Top View in Carrier board</td></tr><tr><td></td><td></td></tr><tr><td colspan="2">Back View in Carrier board</td></tr><tr><td></td><td></td></tr><tr><td colspan="2">Front View in box PC</td></tr><tr><td></td><td></td></tr></table>		Original (Compupack 志展)	New (UDE 湧徳)	Top View in Carrier board				Back View in Carrier board				Front View in box PC			
	Original (Compupack 志展)	New (UDE 湧徳)														
	Top View in Carrier board															
																
	Back View in Carrier board															
																
Front View in box PC																
																

2.14 Micro SIM Card Socket

Function	Micro SIM Card	
Location	J17	
Type Description	SOCKET_MICRO SIM_8PIN_90°_SMD	
Manufacturer and Part Number	福軒 Fullglory FG-0271AAAG06A PUSH PUSH 1.42H	
Pinout	Refer to Micro SIM card standard	
Remark	*Push Push type *Inserting directing as below 	

2.15 Mini card socket

Function	Mini Card (PCIe) interface	
Location	J22	
Type Description	SOCKET_MINI PCIE_52PIN	
Manufacturer and Part Number	FOXCONN, AS0B221-S68Q-7H_H=6.8MM-062AL6	
Mating Connector	Any Mini Card standard interface device.	
Pinout	Please refer to Mini Card standard for the pinout details.	
Remarks	None	


2.16 OOB board connector


Function	Connector of OOB board			
Location	J26, J27, J28			
Type	WAFER_1*2PIN_1 mm_180°_SMD			
Description				
Manufacturer and Part Number	宏致 ACES 50228-00271-001_WTB			
Mating Connector	宏致 ACES 50233-002H0H0-001			
Pinout	J26	Description		
	PIN1	+5V Power		
	PIN2	GND		
	J27	Description		
	PIN1	Reset		
	PIN2	GND		
	J28	Description		
	PIN1	Power		
	PIN2	GND		
	Remarks	None		



2.17 DC POWER JACK

Function	DC Power input with lock		
Location	J30		
Type Description	JACK_DC POWER_D2.5 mm_90°_DIP include nut and washer		
Manufacturer and Part Number	京政 JKCR DCD-020-105B		
Mating Connector	伸銘 SMCTS OD 5.5*2.5 mm DC 10mm (655-236)		
Pinout	Pin Number	Description	
	Center	Power	
	Outer ring	GND	
Remarks	NA		



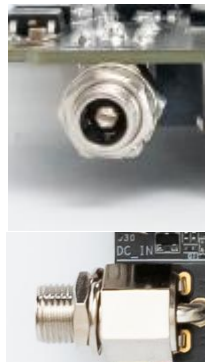

2.18 ATX 4P

Function	ATX 4P		
Location	J31		
Type Description	WAFER_2*2PIN_4.2 mm_90°_DIP		
Manufacturer and Part Number	福軒 Fullglory FPWD-42R2-04NAT		
Mating Connector	Follow ATX 4pin power standard		
Pinout	Pin Number	Description	
	1	GND	
	2	GND	
	3	12-54V Power	
	4	12-54V Power	
Remarks	None		



2.19 USB 2.0 Gen 1 Type-A Connector #1, #2

Function	USB 2.0 Gen 1 Type-A connector #1 #2	 
Location	J33	
Type Description	Dual-port USB 2.0 Gen 1 Type-A female connector	
Manufacturer and Part Number	捷湧 EDL UAF208D010B	
Mating Connector	Any USB 2.0 standard Type-A interface cable or device.	
Pinout	Please refer to USB 2.0 Gen 1 standard.	
Remarks	None	

2.20 12V power connector for daughter board

Function	12V power output connector													
Location	J37													
Type Description	WAFER_1*5PIN_2 mm_180°_SMD													
Manufacturer and Part Number	宏致 ACES 50310-0057N-001_WTB HEADER-H6.5mm													
Mating Connector	宏致 ACES 50389-005H0H0-001													
Pinout	<table><tr><th>Pin Number</th><th>Description</th></tr><tr><td>1</td><td>+12V Power</td></tr><tr><td>2</td><td>+12V Power</td></tr><tr><td>3</td><td>GND</td></tr><tr><td>4</td><td>GND</td></tr><tr><td>5</td><td>NC</td></tr></table>	Pin Number		Description	1	+12V Power	2	+12V Power	3	GND	4	GND	5	NC
Pin Number	Description													
1	+12V Power													
2	+12V Power													
3	GND													
4	GND													
5	NC													
Remarks	None													

2.21 PCIE x16 socket

Function	PCIE x16 socket	
Location	J5,J6	
Type Description	SOCKET PCIE 164PIN 180° SMD	
Manufacturer and Part Number	鴻海 Foxconn 2EF5823-DA9D0-8F	
Mating Connector	Please refer to PCIE card standard	
Pinout	Please refer to PCIE card standard	
Remarks	None	

2.22 Board to board connector (to Camera board)

Function	Board to board connector	
Location	J60	
Type Description	WAFER 2*60PIN 0.5 mm 180° SMD	
Manufacturer and Part Number	SAMTEC QSH-060-01-L-D-A-K-TR BTB-RECEPTACLE	
Mating Connector	SAMTEC QTH-060-03-H-A-D BTB-PLUG QTH-060-04-H-A-D BTB-PLUG	
Pinout	Comply with NVIDIA Devkit pinout.	
Remarks	None	

2.23 CAN Bus 3-pin terminal block with transceiver

Function	CAN Bus 3-pin terminal block with transceiver						
Location	BJ3						
Type Description	TERMINAL BLOCK_1*3PIN						
Manufacturer and Part Number	進聯 DECA, ME030-38103T, GREEN-P3.81 mm						
Mating Connector	進聯 DECA, MC420-38103Z						
Pinout	Pin #	Description					
	1	CANH					
	2	GND					
	3	CANL					
Remarks	None			<table><tr><td>3</td><td>2</td><td>1</td></tr></table>	3	2	1
3	2	1					

2.24 Debug port

Function	Debug port			
Location	JP8			
Type Description	HEADER_PIN_1*4PIN_2.54 mm_180° SMD			
Manufacturer and Part Number	宏致 ACES 60240-00471-001			
Mating Connector	Any 2.54mm pitch standard interface female			
Pinout	Pin #	Description		
	1	+3.3V Power		
	2	RX		
	3	TX		
	4	GND		
Remarks	None			

2.27 Switch Button

Function	Switch Button				
Location	SW6				
Type Description	2 SPST DIP switch				
Manufacturer and Part Number	冠泰 IN OFF-SWITCHING 0.025A/24VDC				
Pinout	Mini Card (J22) Function Selection				
	No.	Position Descript	4G LTE (Default)	Capture Card / PCIe device	5G Card (TBD)
	1	USB RST	OFF	OFF	ON
	2	PCIE RST	OFF	ON	OFF
Remark	NA				

Other Switches and Jumpers

Other switches and jumpers listed on the boards but not mentioned in this manual are reserved for the internal use by AVerMedia. They are not open to the client application.

3.0 Installation

- Check and ensure all the external system power supplies are turned off.
- Connect the power cord to CB/devkit/Box PC DC in jack or ATX 4pin
- Connect the Micro USB2.0 cable to CB/devkit/Box PC connector.
- Press and hold on the Recover button
- Plug in AC power

(Since the DCINJACK is slightly tight, be careful not to shake it when inserting the CB/devkit/Box PC)

3.1 BSP Setup Instructions

BSP (board support package) file: D315AO-R2.*.*.*.tar.gz for D315AO

If you want to get the BSP download link, Please contact with AVerMedia FAE.

Default login username/password of the BSP is nvidia/nvidia

If you have difficulties to access the BSP download link, please visit AVerMedia website at <https://www.avermedia.com/professional/download>, or contact technical support at https://www.avermedia.com/professional/technical_support or e-mail us at esusupport@avermedia.com for further assistance.

BSP Installation steps for NVIDIA Jetson board: (Important Note: Please backup your personal files before re-flashing BSP)

After you download the BSP file and put the file in a Linux PC, please refer to the steps below to re-flash BSP.

1. Let the JETSON AGX Orin initiate recovery mode.

You have to keep pressing “Recovery” button and then power on the NVIDIA Jetson board to initiate recovery mode.

When connecting a NVIDIA Jetson board to a Linux PC via a MicroUSB to USB cable, you can check kernel messages with ‘dmesg’ command in the Linux PC.

Once you see the similar messages as below, it means that the NVIDIA Jetson board is in the recovery mode.

```
[24685.229129] usb 1-7: Product: APX
```

```
[24685.229132] usb 1-7: Manufacturer: NVIDIA Corp
```

2. Using the commands below in the Linux PC to start re-flashing BSP.

sudo is required to extract BSP

```
$ sudo tar zxvf D315AO-R2.*.*.*.tar.gz
$ cd JetPack_*.*/Linux_for_Tegra
$ ./install.sh
```

4.0 Software

This section describes BSP's features for D315AO

1. Support optional M.2 WI-FI/Bluetooth modules (Intel® Wireless-AX210), the manager UI of AX210 WiFi/Bluetooth is located on the upper-right corner of Ubuntu desktop. It can be also controlled by nmcli/bluetoothctl in command line.
2. Power Mode
Power mode can be modified by the UI on the upper-right corner of Ubuntu or the following commands.

```
# get current power mode
$ sudo nvpmmodel -q
# setup power mode
# where <x> is power mode number, please refer to
https://docs.nvidia.com/jetson/archives/r35.1/DeveloperGuide/text/SD/PlatformPowerAndPerformance/JetsonOrinNxSeriesAndJetsonAgxOrinSeries.html?highlight=nvpmmodel#supported-modes-and-power-efficiency for more
information
$ sudo nvpmmodel -m <x>
```

* Current default power mode:

D315AO: MODE 30W (2)

3. RTC Battery
The following command can get RTC battery voltage.

```
$ sudo avt_tool -a | grep -oP "AIN5.*[K[^\]]*"
```

4. Fan Speed
The following commands can get PWM fan information.

```
# get current speed setting of PWM Fan (0 ~ 255)
$ cat /sys/devices/platform/pwm-fan/hwmon/hwmon2/pwm1

# get Fan RPM value
```

```
$ cat /sys/devices/platform/39c0000.tachometer/hwmon/hwmon1/rpm
```

5. CAN Bus

(1) Enable and setup CAN Bus

```
# 1. Enable CAN Bus
$ sudo modprobe can
$ sudo modprobe can-raw
$ sudo modprobe mttcan

# 2. Setup CAN Bus
$ sudo ip link set can0 type can bitrate 500000 dbitrate 2000000 berr-reporting on
fd on restart-ms 100
$ sudo ip link set can0 up
```

(2) Receive and Send

```
# Receive
$ candump can0

# Send
$ cansend can0 <can_frame>
```

* where:

<can_frame> is CAN Bus frame message, see `cansend --help` for more detail.

6. Camera

The camera support on D315AO are listing as below:

* ECON AR0230 (120p serdes camera)

Test Command:

```
> ECON eCAM20 (ar0230):
```

```
  No  width  height  framerate
```

```
0   640   480      60/45
```

```
1   960   540      58/30
```

```
2  1280    720       45
```

```
3  1280    960       34
```

```
4 1920   1080       30
```

```
$ gst-launch-1.0 -e v4l2src device=/dev/video0 do-timestamp=true ! 'video/x-raw,width=640,height=480,framerate=60/1,format=UYVY' ! fpsdisplaysink video-sink=xvimagesink sync=false
```

```
$ gst-launch-1.0 -e v4l2src device=/dev/video0 do-timestamp=true ! 'video/x-raw,width=960,height=540,framerate=58/1,format=UYVY' ! fpsdisplaysink video-sink=xvimagesink sync=false
```

```
$ gst-launch-1.0 -e v4l2src device=/dev/video0 do-timestamp=true ! 'video/x-raw,width=1280,height=720,framerate=45/1,format=UYVY' ! fpsdisplaysink video-sink=xvimagesink sync=false
```

```
$ gst-launch-1.0 -e v4l2src device=/dev/video0 do-timestamp=true ! 'video/x-raw,width=1280,height=960,framerate=34/1,format=UYVY' ! fpsdisplaysink video-sink=xvimagesink sync=false
```

```
$ gst-launch-1.0 -e v4l2src device=/dev/video0 do-timestamp=true ! 'video/x-raw,width=1920,height=1080,framerate=30/1,format=UYVY' ! fpsdisplaysink video-sink=xvimagesink sync=false
```

7. GPIO usage

(1) Output: (e.g. gpio483)

```
$ sudo su
```

```
$ gpio_id=483
```

```
$ echo $gpio_id > /sys/class/gpio/export
```

```
$ cat /sys/kernel/debug/gpio | grep 483
```

```
gpio-483 (PZ.05      )
```

```
$ gpio_index=PZ.05
```

```
$ echo out > /sys/class/gpio/$gpio_index/direction
```

```
$ echo 1 > /sys/class/gpio/$gpio_index/value # HIGH
```

```
$ echo 0 > /sys/class/gpio/$gpio_index/value # LOW
```

(2) Input

```
$ sudo su
```

```
$ gpio_id=483
$ echo $gpio_id > /sys/class/gpio/export
$ cat /sys/kernel/debug/gpio | grep 483
gpio-483 (PZ.05)
$ gpio_index=PZ.05
$ echo in > /sys/class/gpio/$gpio_index/direction
$ cat /sys/class/gpio/$gpio_index/value # 1: HIGH, 0: LOW
```

(3) Disable

```
$ sudo su
$ gpio_id=483
$ echo $gpio_id > /sys/class/gpio/unexport
```

For L4T (Linux for Tegra) BSP support and the other software support associated with NVIDIA® Jetson AGX Orin, please visit AVerMedia website to contact our technical support function. (<https://www.avermedia.com/tw/support/contact>)

5.0 Force Recovery Mode

MicroUSB Jetson platform port of D315 can be used to re-program NVIDIA® Jetson AGX Orin by using the other host system running NVIDIA Jetpack, as the procedure described below.

1. Before you start
 - Please make sure to use a Linux host PC with Ubuntu 18.04 or 20.04 operating system.
 - Please use a native setup (no virtual machine) installation file in the following steps.
 - You will also need a high-quality standard USB. Type A to micro-USB cable
 - Download installation file from AVermedia.
2. Connect carrier board to host PC
3. Connect the system to the Linux host PC. Please use a USB cable (micro-USB on the carrier board).
4. After connecting to the host PC powering up the system. The system will detect the host PC and automatically enter the flashing state (also called force recovery mode).
5. Check that the connection is established with the `lsusb` command. You should find one entry with Nvidia Corp. as highlighted below.
6. Flashing of system
 - Use the flash cmd script in the extracted bootloader folder to transfer the software into the Jetson compute module and flash it.
 - Please connect a monitor to the system. After the flashing process has completed the should automatically boot and show the Ubuntu desktop.
 - You now have a functioning system ready for your needs.

6.0 Power Consumption

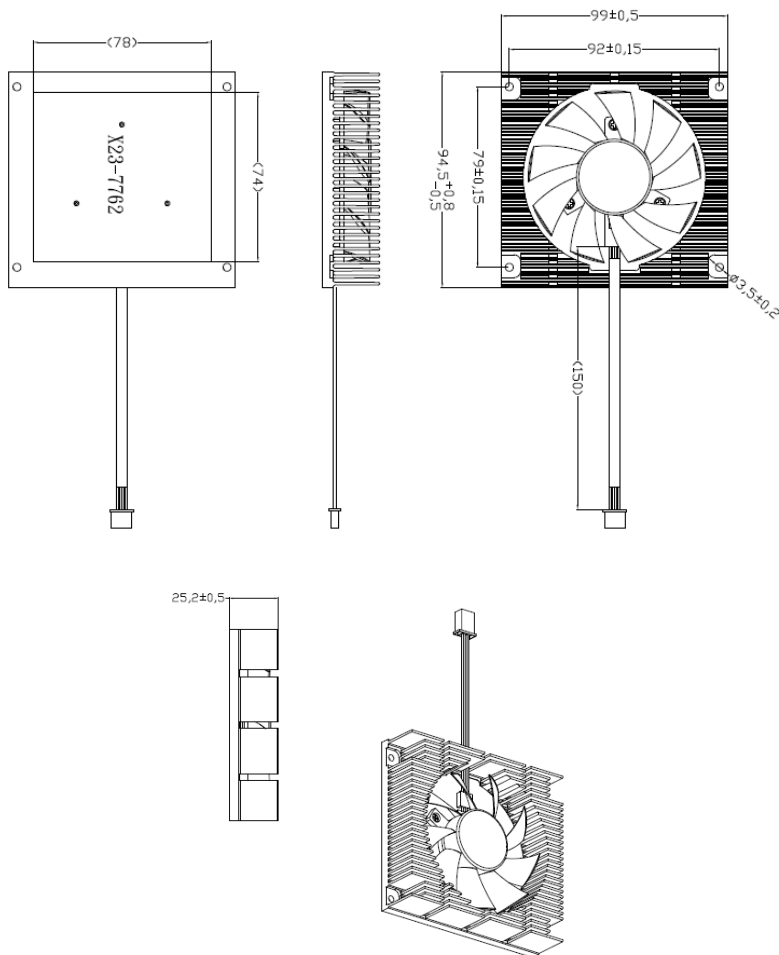
Item Description	Power Consumption
Theoretical Maximum System Power Consumption	● Power Consumption of D315AOB-32G: 11.5W(*1) to 64W (*2) ● Power Consumption of D315AOB-64G: 13.5W(*1) to 66W (*2) ● Power Consumption of D315AOP-32G: 11.5W(*1) to 64W (*2) ● Power Consumption of D315AOP-64G: 13.5W(*1) to 66W (*2) *1: The condition is Normal Mode and connected to USB3*2/ USB2*2/ Ethernet*1/ SD Card*1 *2: The condition is Full Loading Mode and connected USB3*2/ USB2*2)/ Ethernet*1(1G)/ Micro SD Card*1 / SSD*1/ WIFI (Intel AC9260)*1/ PCIe card AVerMedia CL312*1 / 4G (SIMCOM SM7600H)*1
Typical System Power Consumption	The power consumption under the normal operating mode is depending on the application software running with NVIDIA® Jetson AGX Orin

7.0 Accessory Drawings

7.1 Fan Module/ Adapter/ Power Cord (Original)

Fan Module for AGX Orin

- Rated Voltage: 12V
- Operating Voltage Range: 11.4V~12.6V
- Rated Speed: 4200±10% RPM
(Testing Speed After Continuous 3Minute Operation At Ambient Temperature Of 25 °C)
- Life Expectancy: 50,000hours at 40°C (5 TO 90% RH)
- Bearing Type: Two Ball



Fan Module/ Adapter/ Power Cord (PCN20230906-1)

Fan Module for AGX Orin

- Rated Voltage: 12V
- Operating Voltage Range: 11.4V~12.6V
- Rated Speed: 4200±10% RPM
(Testing Speed After Continuous 3Minute Operation At Ambient Temperature Of 25 °C)
- Life Expectancy: 50,000hours at 40 °C (5 TO 90% RH)
- Bearing Type: Two Ball



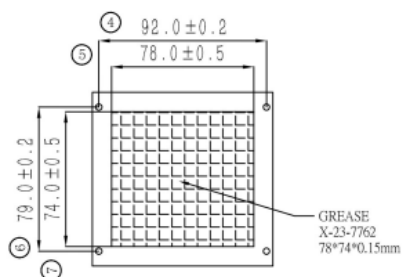

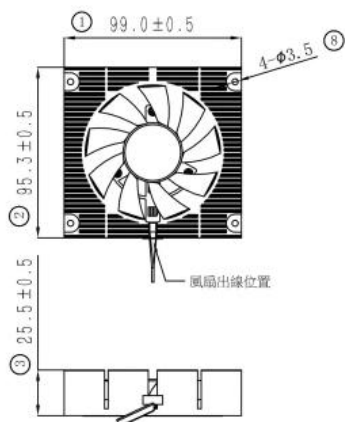


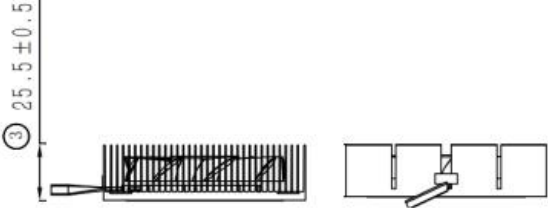



Table1:

1st source thermal module	Vendor A   
2nd source thermal module	Vendor B   

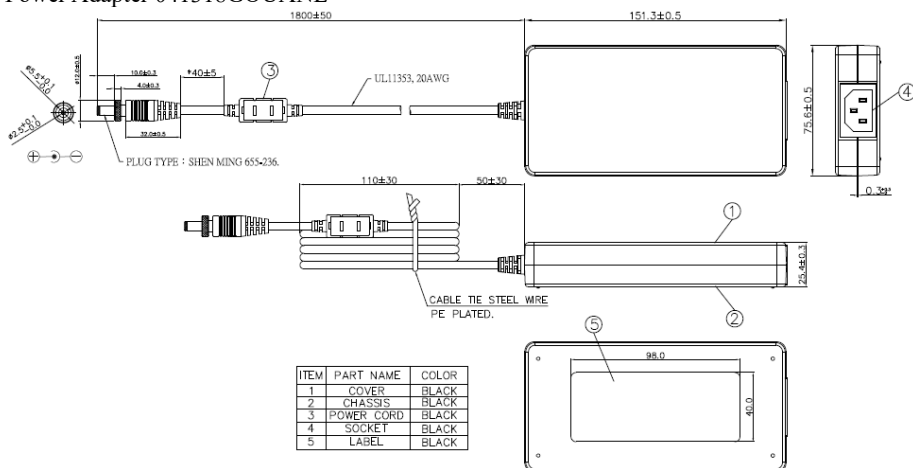
Power Adapter 041318GOUANL




64APOWBRX-IPD (TW version)

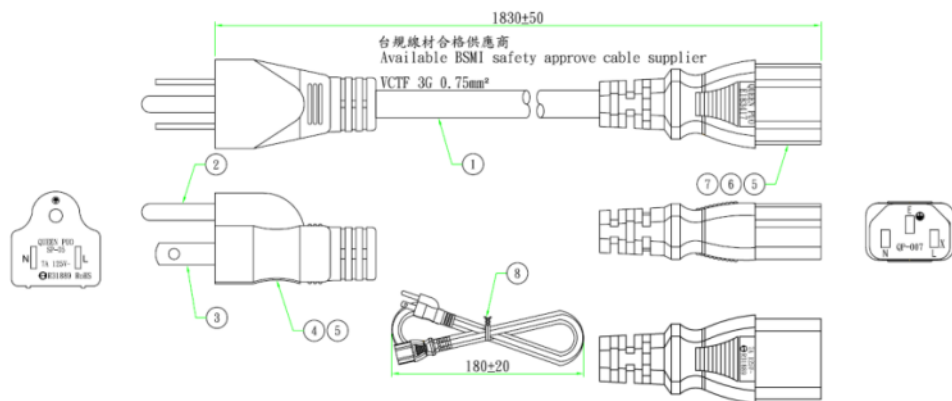


064APOWBR2-IPD (US version)

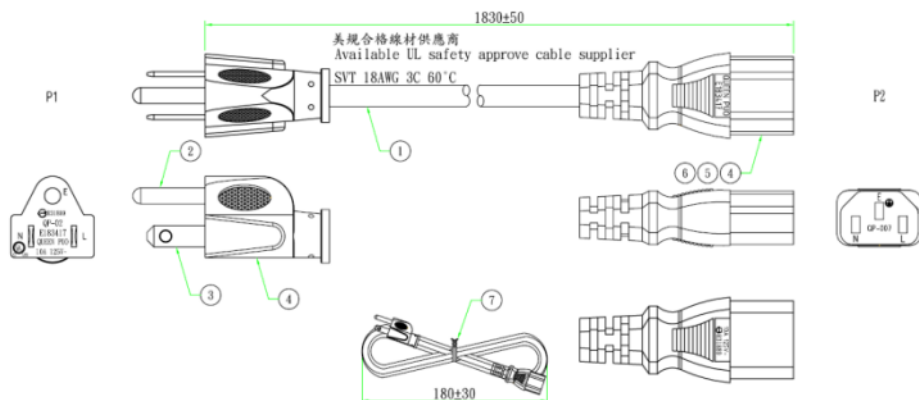


064APOWBRW-IPD (UK version)

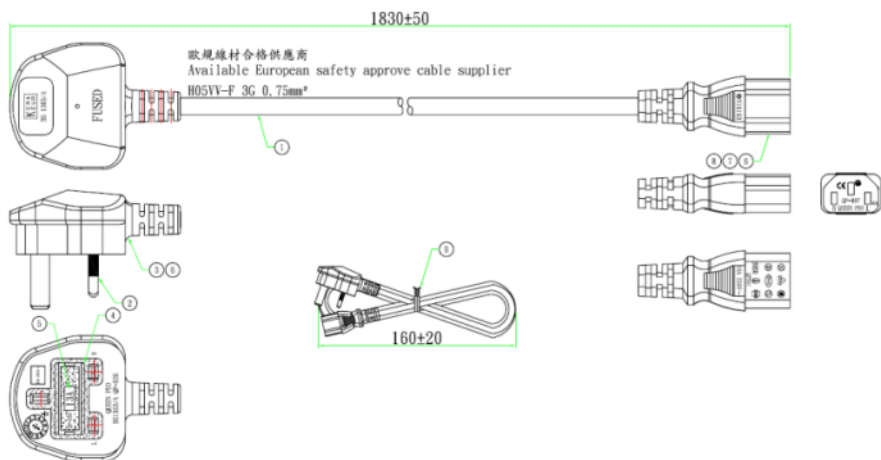


064APOWBR5-IPD (EU version)

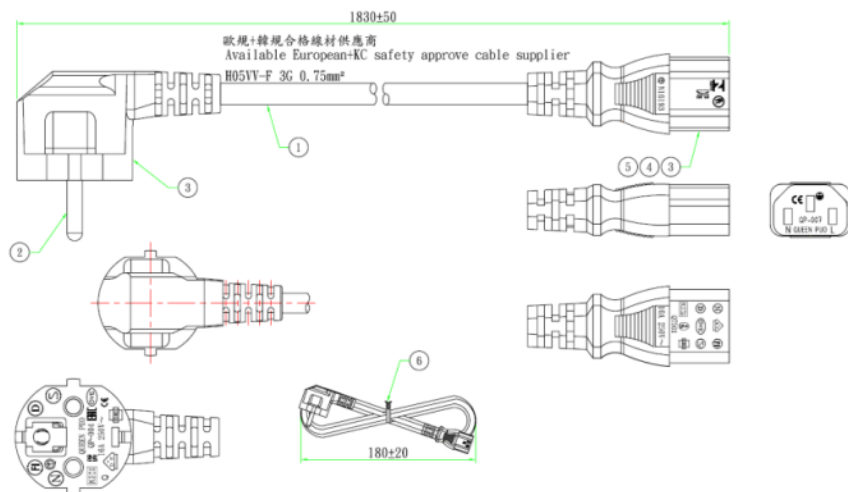

064APOWERSL (JP version)






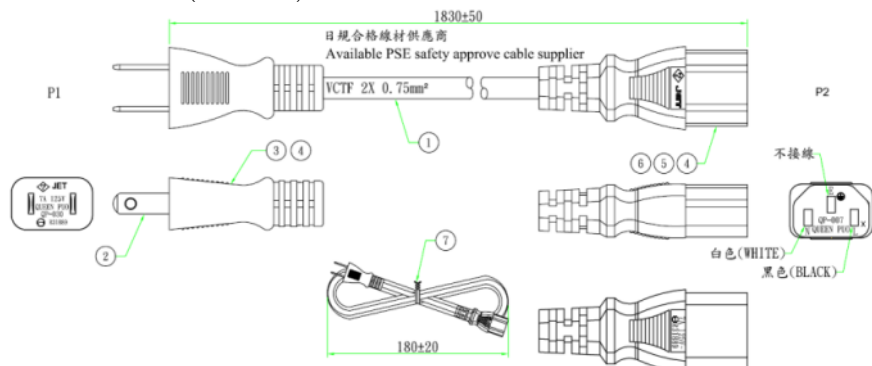


064APOWERSL4-IPD (CN version)

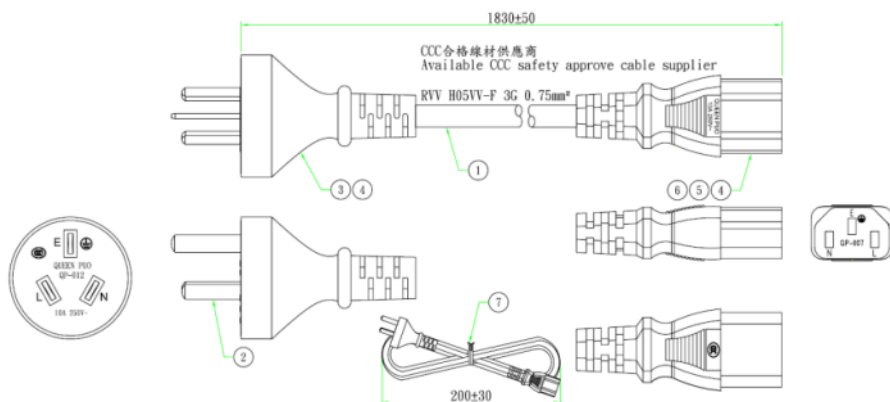

8.0 D315AOP (2D Drawing)

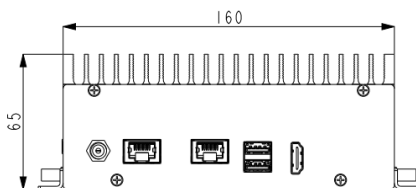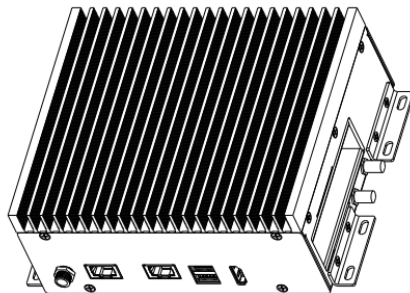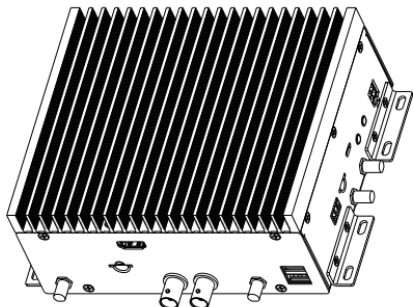D315AOP (2D Drawing)



D315AOP (2D Drawing)

