

NPT TYPE METAL CORD GRIPS



Material: Nickel-plated brass
Fixture pack: PA (NYLON), UL 94
Hermetic seal: NBR
O-Seal ring: NBR
Protection degree: IP68-10 pressure (Rotate position)
Working temperature: -40°C to 100°C
 Instantaneous heat resistance up to 120°C

RoHS

CE IP68 TÜV IP69K
PRODUCT SERVICE

LISTED
 E360400

UL FILE NO.: E360400

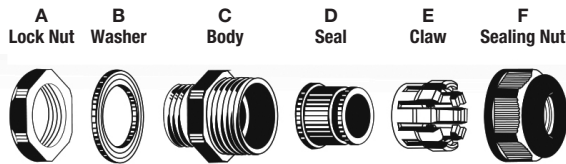

| Techspan Part No. | AG | Inch | H | | GL | | mm | | Package Qty. |
|-------------------|----------|-----------|----|-------|----|------|-------|-----------|--------------|
| | | | mm | inch | mm | inch | mm | inch | |
| BRC09NA* | 3/8" NPT | .15 - .32 | 21 | .827 | 15 | .591 | 17/19 | .669/.748 | 100 |
| BRC09NR* | 3/8" NPT | .07 - .24 | 21 | .827 | 15 | .591 | 17/19 | .669/.748 | 100 |
| BRC13NA | 1/2" NPT | .23 - .47 | 24 | .945 | 13 | .512 | 22/24 | .748/.945 | 50 |
| BRC13NR | 1/2" NPT | .19 - .35 | 24 | .945 | 13 | .512 | 22/24 | .748/.945 | 50 |
| BRC21NA | 3/4" NPT | .51 - .71 | 25 | .984 | 13 | .512 | 30 | 1.181 | 20 |
| BRC21NR | 3/4" NPT | .35 - .63 | 25 | .984 | 13 | .512 | 30 | 1.181 | 20 |
| BRC29NA | 1" NPT | .70 - .98 | 29 | 1.142 | 19 | .748 | 40 | 1.575 | 20 |
| BRC29NR | 1" NPT | .47 - .79 | 29 | 1.142 | 19 | .748 | 40 | 1.575 | 20 |

G

