


## Back-Up Alarms

TECHSPAN® Tonal Back-Up Alarms conform to SAEJ994 safety standards (except for the self-adjusting models) and can be used for 12-24 Volt applications. Solid state electronics are totally encapsulated in epoxy thus sealing alarms against moisture, vibration & corrosion. Polarity protected Nylon Housing. Units are steam-cleanable. Operating temperature: -40°C to 80°C. Universal Mounting. IP67. Screw Terminals.

Units showing a range of decibel levels mean they automatically adjust to changing ambient noise levels. These alarms adjust to a minimum of 5dB above surrounding noise levels.

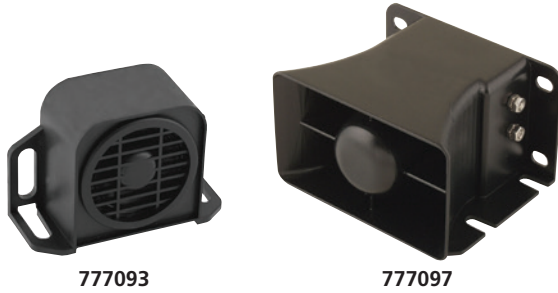

### Tonal Back-Up Alarms (Self-Adjusting)

| Decibel Level(s) | Voltage  | Current Rating | 1PC/PK | 10 PCS/PK |
|------------------|----------|----------------|--------|-----------|
| 77-102dB         | 12-24VDC | 0.6A           | 777093 | 777093B   |
| 87-112dB         | 12-24VDC | 0.8A           | 777097 | 777097B   |



### Tonal Back-Up Alarms (Single Decibel)

| Decibel Level(s) | Voltage  | Current Rating | 1PC/PK *NEW<br>(Clamshell) | 1PC/PK<br>(Colour Box) | 10 PCS/PK |
|------------------|----------|----------------|----------------------------|------------------------|-----------|
| 87dB             | 12-24VDC | 0.6A           | —                          | 777088                 | 777088B   |
| 97dB             | 12-24VDC | 0.8A           | *777082-DP                 | 777082                 | 777082B   |
| 107dB            | 12-24VDC | 0.8A           | *777083S-DP                | *777083S               | *777083SB |
| 112dB            | 12-24VDC | 0.8A           | —                          | 777084                 | 777084B   |



\*NEW



777083 has been superseded by p# 777083S  
777083B has been superseded by p# 777083SB

### The 97db & 107db Tonal Back-Up Alarms Have A New Look (Grill Design, Screw Terminations, Packaging)

**NEW LOOK**



777082 Previous Version



777083 Previous Version



777082 Updated Version



777083S Updated Version

