


STANDARD SUPPORT GRIPS

Standard Support Grips are designed to sustain and shore up the weight of cable in vertical or sloping applications. Constructed of non-magnetic tin-bronze wire, they assist in absorbing strain and flexure; and resist pullout, flexure and vibration. Standard Support Grips are available in a wide selection of eye styles and cable ranges. They will support cable rods and tubing with loads up to 600 lbs. Not recommended for runs over 100 feet.



Double Eye

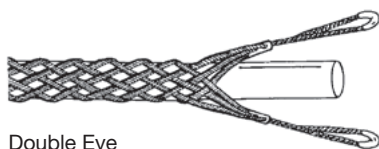

Single Eye



Offset Eye



Universal Bail

Cable Range	Part #	Description	Approx.* Breaking Strength	Length	
				Eye	Mesh
Closed Mesh – Double Eye – Single Weave					
.50-.62	2201-001	R050-DE	770	4	11
.63-.74	2201-002	R062-DE	1150	4	11
.75-.99	2201-003	R075-DE	1320	4	14
1.00-1.24	2201-004	R100-DE	1920	5	15
1.25-1.49	2201-005	R125-DE	1920	5	16
1.50-1.74	2201-006	R150-DE	1920	5	18
1.75-1.99	2201-007	R175-DE	3150	6	20
2.00-2.49	2201-008	R200-DE	3360	6	22
2.50-2.99	2201-009	R250-DE	3360	6	24
3.00-3.49	2201-010	R300-DE	5280	8	26
3.50-3.99	2201-011	R350-DE	5280	8	28
Closed Mesh – Single Eye – Single Weave					
.50-.62	2201-013	R050-SE	770	7	11
.63-.74	2201-014	R062-SE	1150	8	11
.75-.99	2201-015	R075-SE	1320	8	14
1.00-1.24	2201-016	R100-SE	1920	9	15
1.25-1.49	2201-017	R125-SE	1920	10	16
1.50-1.74	2201-018	R150-SE	1920	12	18
1.75-1.99	2201-019	R175-SE	3150	14	20
2.00-2.49	2201-020	R200-SE	3360	16	22
2.50-2.99	2201-021	R250-SE	3360	18	24
3.00-3.49	2201-022	R300-SE	5280	21	26
3.50-3.99	2201-023	R350-SE	5280	24	28
Closed Mesh – Offset Eye – Single Weave					
.50-.62	2201-025	R050-OFS	770	4	11
.63-.74	2201-026	R062-OFS	960	4	11
.75-.99	2201-027	R075-OFS	960	4	14
1.00-1.24	2201-028	R100-OFS	1680	5	15
1.25-1.49	2201-029	R125-OFS	1680	5	16
1.50-1.74	2201-030	R150-OFS	1680	5	18
1.75-1.99	2201-031	R175-OFS	2640	6	20
2.00-2.49	2201-032	R200-OFS	3760	6	22
2.50-2.99	2201-033	R250-OFS	3760	6	24
3.00-3.49	2201-034	R300-OFS	5040	9	26
3.50-3.99	2201-035	R350-OFS	5040	9	28
Closed Mesh – Universal Bail – Single Weave					
.50-.62	2201-037	R050UB-18"	770	18	11
.63-.74	2201-038	R062UB-18"	1150	18	11
.75-.99	2201-039	R075UB-18"	1320	18	14
1.00-1.24	2201-040	R100UB-18"	1920	18	15
1.25-1.49	2201-041	R125UB-18"	1920	18	16
1.50-1.74	2201-042	R150UB-18"	1920	18	18
1.75-1.99	2201-043	R175UB-18"	3150	18	20
2.00-2.49	2201-044	R200UB-18"	3360	18	22
2.50-2.99	2201-045	R250UB-18"	3360	18	24
3.00-3.49	2201-046	R300UB-18"	5280	18	26
3.50-3.99	2201-047	R350UB-18"	5280	18	28

All mesh is available as double weave or stainless steel. Consult factory for availability.