

LA CROSSE<sup>®</sup>  
TECHNOLOGY

# AMP MINI

## 15W WIRELESS CHARGING LED ALARM CLOCK




SETUP GUIDE

MODEL: 617-143

## Initial Setup

1. Connect the USB-C power cord into a power brick (not included) or a USB outlet. Then, plug the other end into your clock. **Optional:** Insert 2 AAA batteries for backup.
2. Follow the instructions below to set the time and alarm.

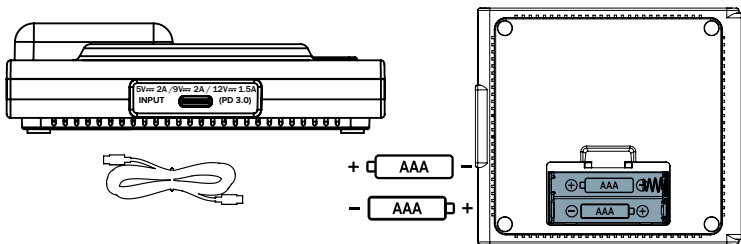

## Set Time

1. Hold the **TIME SET** button until the hour begins flashing.
2. Use the **+** or **-** button to set the hour, cycling to the next 12 O'clock hour for PM time. Press the **TIME SET** button to confirm and move to the minutes.
3. Use the **+** or **-** button to adjust the flashing minutes and press the **TIME SET** button to confirm.

**Note:** Press and release the **SNOOZE** button at any time to exit.





## Set Alarm

1. Hold the **ALARM** button until the hour begins flashing.
2. Use the + or - button to set the alarm hour and press the **ALARM** button to confirm and move to the minutes.
3. Use the + or - button to adjust the flashing minutes and press the **ALARM** button to confirm and activate the alarm.

**Note:** Press and release the **SNOOZE** button at any time to exit.



## Activate/Deactivate Alarm



- Press and release the **ALARM** button to activate or deactivate the alarm.
- The Alarm Indicator   will be solid green when alarm is active
- When deactivated, the word OFF will show for a few seconds before returning to a normal time display.



## Silence a Sounding Alarm


- The alarm will increase in beep frequency over a 2-minute period. After the 2-minute time frame, the alarm will stop if not snoozed or turned off.
- Press any button except SNOOZE to silence the alarm for 24-hours.

## Snooze

- When the alarm sounds, press and release the **SNOOZE** button to silence the alarm for 10 minutes. Snooze may be repeated.
- The Alarm Indicator   will flash while snoozing.













## Display Brightness

The display and front indicators can be adjusted with four brightness levels or turned off. When turned off, the display and front indicators will appear dark.


- Press and release the  button to select Brightness Level. L4, L3, L2, or L1 will show.
- When brightness is off, the display will be dark. Press and release any button to restore brightness to level 4, or press and release the **SNOOZE** button to briefly display the time at level 3 brightness.

## Wireless Charging

Place a Qi compatible device on the wireless charging platform.

- The Charging Indicator   will be solid red while charging and solid blue   when fully charged\*.
- The Charging Indicator will flash red   |   |   if there is a problem with placement, compatibility or foreign object on the charging pad.
- The Charging Indicator   will be dark when not in use.
- Compatibility may vary based on phone model and/or case selection. Appropriate brick or outlet is required for charging.

\***Note:** Some phone brands do not send a “full charge” indication to the clock. The solid blue light will not appear when charging these phones.

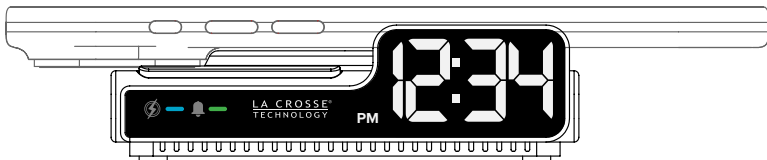

## Charging Output

The brick powering the alarm clock will determine your charging output.

- 5W Standard Charging: All Qi-enabled phones.
- 7.5 -15W Fast Charging: Higher-end phones require a PD 3.0W power brick for optimal performance.

**Important:** Wireless charging uses magnetic induction to charge your compatible smartphone. Do not place anything between your phone and the charging pad. Keep charging pad clear of all foreign objects. Magnetic mounts, magnetic cases, or other objects between your phone and the wireless charger may reduce performance or damage magnetic strips or RFID chips found in some credit cards, security badges, passports, and key fobs. If your phone case holds any of these sensitive items, be sure to remove them before charging or make sure they are not between the back of your phone and the charging pad.

## Battery Backup

- Insert 2 AAA batteries to back up your time, date, and programmed alarm, which will sound as needed.
- When on battery power, press and release the **SNOOZE** button to briefly show the time. Otherwise, the display will remain dark.
- The charging pad will not function with battery operation alone.

## Join the Conversation!

Ask questions, watch set up videos, and provide feedback on our social media outlets. Follow La Crosse Technology on YouTube, Facebook, and Instagram.



## Specifications

**Time Digit Height:** 0.70 in (1.78 cm)

**Alarm Beeping Sound:** Up to 90dBs

**Alarm Duration:** 2 Minutes

**Snooze Duration:** 10 minutes

**Power Requirement:** USB-C Power Cord (Brick Not Included)

**Cord Length:** 39.0 in (100.0 cm)


**Wireless Charger Power Output:** 15 Watt Max

Compatibility may vary based on phone model and/or case selection. Appropriate brick required for charging. Please check your phone's manual for details regarding wireless charging capabilities.

**Battery Backup:** 2 "AAA" (LR3, IEC) batteries (Not Included)

**Battery Life:** 3+ years with Power Cord Use.

**Dimensions:** 3.94 in L x 4.44 in W x 1.14 in H  
(10.00 cm L x 11.29 cm W x 2.90 cm H)

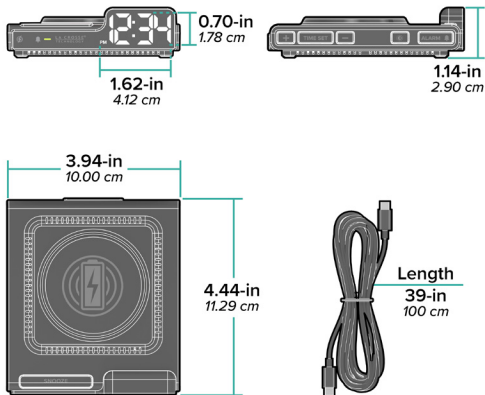

## We're Here to Help

If you require additional assistance, get in touch with our friendly customer support team based in La Crosse, WI.

**Self Help:** [bit.ly/617-143\\_support](https://bit.ly/617-143_support)

**Online:** [bit.ly/contact\\_techsupport](https://bit.ly/contact_techsupport)

**Phone:** 1.608.782.1610

Our knowledgeable customer support team is available:  
Mon-Fri 8am-6pm CST

**SCAN HERE**  
**Additional Info**  
**and Support** ✓



## Warranty & Patents

La Crosse Technology Ltd. provides a 1-year limited-time warranty on this product relating to manufacturing defects in materials & workmanship. Per the Song-Beverly Act, in the state of California, the warranty on this item becomes effective on the date of delivery.

La Crosse Technology, Ltd, 2830 S. 26th St., La Crosse, WI 54601

**For Full Warranty Details, Visit:** [www.lacrossetechnology.com/pages/warranty](http://www.lacrossetechnology.com/pages/warranty)

**Patents:** [www.lacrossetechnology.com/pages/patents](http://www.lacrossetechnology.com/pages/patents)



**WARNING:** This product can expose you to chemicals including acrylonitrile, 1, 3-butadiene, and styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Care and Maintenance

When batteries of different brand or type are used together, or new and old batteries are used together, some batteries may be over-discharged due to a difference of voltage or capacity. This can result in venting, leakage, and rupture and may cause personal injury.

- Do Not Mix Old and New Batteries.
- Do Not Mix Alkaline, Standard, or Rechargeable Batteries.
- Always purchase the correct size and grade of battery most suitable for the intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries are installed correctly with regard to polarity (+ and -).
- Remove batteries from product during periods of non-use. Battery leakage can cause corrosion and damage to this product.
- Remove used batteries promptly.
- For recycling and disposal of batteries, and to protect the environment, please check the internet or your local phone directory for local recycling centers and/or follow local government regulations.

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### Radiation Exposure Statement

This equipment complies with Innovation, Science and Economic Development (ISED) and FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

### Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**All rights reserved.** This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences.

All trademarks and patents are recognized. The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

## Double Your Warranty

Scan the QR Code or visit: [bit.ly/617-143\\_register](https://bit.ly/617-143_register) to register your product and double the standard 1-year warranty for free by opting to receive occasional product emails.

