

LA CROSSE®
TECHNOLOGY

INSTA-SET DIGITAL LED ALARM CLOCK
WITH BLUETOOTH® TECHNOLOGY




SETUP GUIDE

MODEL: 617-714

Initial Setup

1. Insert the power cord into the brick, then plug the brick into an outlet.
2. Insert the USB-C end of the power cord into the INPUT port on the clock.
Optional: Insert 2 AAA batteries for backup.
3. Open the Bluetooth settings on your mobile device and select **LT_CLOCK**, allowing all permissions.
4. The Time and Date should automatically transfer from your mobile device.

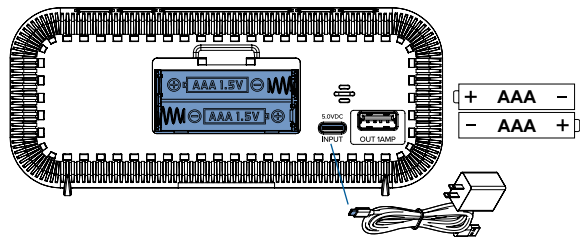

Manual Setup:

Refer to page 6 for instructions that do not require a mobile device.

Continued Calibration

The alarm clock will automatically resync with your mobile device at 4:00am, 12:00pm, and 8:00pm daily to remain accurate without any manual intervention.

Manual Bluetooth Connection

To sync the clock to a new mobile device, turn off Bluetooth on any previously paired device or ensure it is not within range. Then press and release the **+|📶** button on the clock to initiate pairing mode. Open the new mobile device's Bluetooth settings, select **LT_CLOCK**, and allow all permissions.



Note: "bt" will show on the screen while in pairing mode.

Alarm

Customize your alarm by choosing your time, frequency, and snooze duration.


When triggered, the alarm will sound for 2 minutes with increasing frequency, then automatically pause for 24 hours if no button is pressed.


Set Time Alarm

1. Hold the **ALARM** button to enter the Alarm Setting.
2. Press and release the **+|⌘** or **-|°F/°C** button to adjust the values.
3. Press and release the **ALARM** button to confirm adjustments and move to the next item.
4. Press the **SNOOZE/BRIGHTNESS** button at any time to exit.


Alarm Settings Order:

- Alarm Hour
- Alarm Minutes
- Alarm Frequency
- Snooze Duration

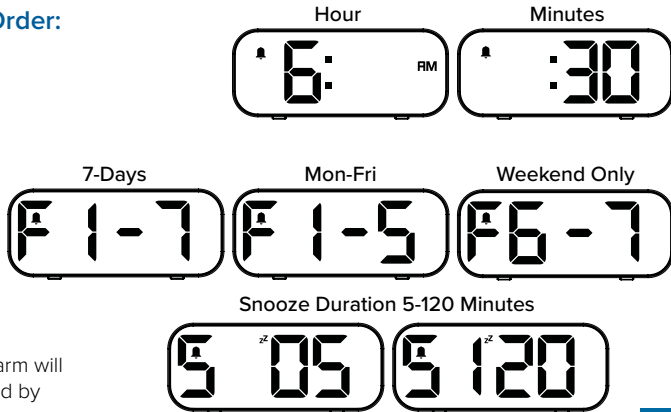

Once set, the time alarm will be activated, indicated by the  icon.


Silence a Sounding Alarm

When the alarm sounds, press any button except **SNOOZE/BRIGHTNESS** to silence the alarm for 24 hours. The Alarm Icon  will remain on.

Snooze

- When the alarm sounds, press and release the **SNOOZE/BRIGHTNESS** button to silence the alarm for your preset snooze duration.
- The Snooze Icon **Zz** will flash.
- The Snooze may be repeated.
- Press and release any button except **SNOOZE/BRIGHTNESS** button to turn off the snooze.

Activate/Deactivate the Alarm

Press and release the **ALARM** button to view your alarm time and activate or deactivate the alarm. The Alarm Icon  will show when active.


Custom Display

Press and release the **MODE** button to toggle between Time, Calendar, and Indoor Temperature.



Fahrenheit or Celsius Temperature Display

Press and release the **-|°F/°C** button to toggle between Fahrenheit or Celsius Indoor Temperature display.

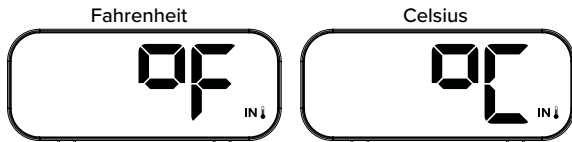

Display Brightness

Press and release the **SNOOZE/BRIGHTNESS** button to adjust the LCD brightness. There are four levels and an off option.



USB Charging Port

- 1-Amp maximum current (output). Charge only 1A device or devices that are self-regulating.
- Connect your external device's charging cable (not included) to the USB-A OUT port on the back of the clock.
- Charging times will vary.

Manual Settings

1. Hold the **MODE** button to enter the Settings Menu. “HI” will show briefly.
2. Press and release the **+|°F/°C** or **-|°F/°C** button to adjust the values.
3. Press and release the **MODE** button to confirm adjustments and move to the next item.
4. Press the **SNOOZE/BRIGHTNESS** button at any time to exit.

Settings Menu Order:

- 12/24-Hour Time
- Hour
- Minutes
- Year
- Month
- Date



Battery Backup

- Insert 2-AAA batteries to back up your settings and time alarm in the event of a power loss. The display will go dark, but the alarm will continue to sound if triggered.
- Press and release the **SNOOZE/BRIGHTNESS** button to activate the display for about 10 seconds.
- Use the provided USB-C power cord during normal operation.

Low Battery Indicator

When the Low Battery Indicator  shows, replace batteries in the clock.

Specifications

Time Format: 12 or 24-Hour Time

Time Digit Height: 1.75-inches (4.45 cm)

Indoor Temp Range: 32°F to 99°F (0°C to 37°C)

LCD Brightness: 4 Intensity Levels + OFF

Alarm Duration: 2 Minutes

Alarm Sound: Ascending Beep (Up to 95dB)

Custom Snooze Duration: 5-120 Minutes

USB-A Charging Output: 1 Amp




Power Requirement: 5V USB-A to USB-C Cord with Brick (Included) HX07B-0501500-CU
The plug on the power adapter is intended to serve as the disconnect device. The socket outlet shall be installed near the equipment and shall be easily accessible.

Battery Backup: 2 AAA Batteries (Not Included)

Battery Life: 12+ Months with Power Cord Use

Dimensions: 6.00 in L x 2.26 in W x 2.59 in H (15.25 cm L x 5.74 cm W x 6.58cm H)

DIMENSIONS



We're Here to Help

If you require additional assistance, get in touch with our friendly customer support team based in La Crosse, WI.

Self Help: bit.ly/617-714_support

Online: bit.ly/contact_techsupport

Phone: 1.608.782.1610

Our knowledgeable customer support team is available:
Mon-Fri 8am-6pm CST

Stay in Touch!

Ask questions, watch set up videos, and provide feedback on our social media outlets. Follow La Crosse Technology on Youtube, Facebook, and Instagram.



SCAN HERE
Additional Info
and Support



Warranty & Patents

La Crosse Technology Ltd. provides a 1-year limited-time warranty on this product relating to manufacturing defects in materials & workmanship. Per the Song-Beverly Act, in the state of California, the warranty on this item becomes effective on the date of delivery.

La Crosse Technology, Ltd, 2830 S. 26th St., La Crosse, WI 54601

For Full Warranty Details, Visit: www.lacrossetechnology.com/pages/warranty

Patents: www.lacrossetechnology.com/pages/patents

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by La Crosse Technology is under license. Other trademarks and trade names are those of their respective owners.

⚠ WARNING: This product can expose you to chemicals including acrylonitrile, 1,3-butadiene, and styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to: www.P65Warnings.ca.gov

Care & Maintenance

When batteries of different brand or type are used together, or new and old batteries are used together, some batteries may be over-discharged due to a difference of voltage or capacity. This can result in venting, leakage, and rupture and may cause personal injury.

- Do Not Mix Old and New Batteries.
- Do Not Mix Alkaline, Standard, or Rechargeable Batteries.
- Always purchase the correct size and grade of battery most suitable for the intended use.
- Always replace the whole set of batteries at one time, do not to mix old and new ones, or batteries of different types.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries are installed correctly with regard to polarity (+ and -).
- Remove batteries from product during periods of non-use. Battery leakage can cause corrosion and damage to this product.
- Remove used batteries promptly.
- For recycling and disposal of batteries, and to protect the environment, please check the internet or your local phone directory for local recycling centers and/or follow local government regulations.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

LA CROSSE®
TECHNOLOGY

DOUBLE YOUR WARRANTY



Scan the QR Code or visit: bit.ly/617-714_register
to register your product and double the standard 1-year warranty
for free by opting to receive occasional product emails.