




# User Manual

19" Rack-mountable  
Active Receiver Multicoupler  
type  
PRO-ARU4G  
PRO-ARU8G

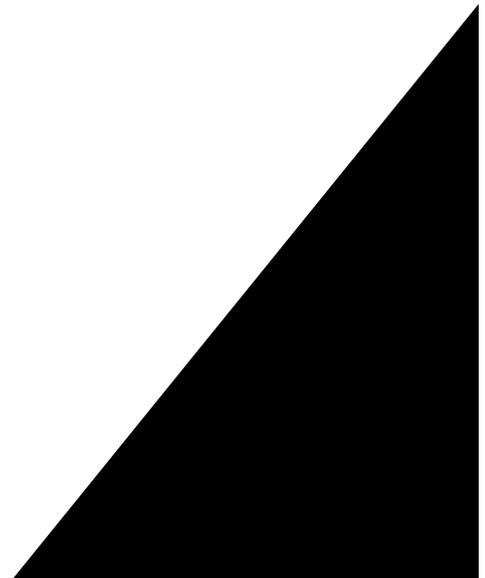

Title:				
User Manual for 19" Rack-mountable Active Receiver Multicoupler type PRO-ARU...G (...: 4 or 8)				
Document version:				
Reviewed: 1r0				
Reviewed: 1r1				
<b>Document Change Record</b>				
<b>Issue</b>	<b>Date</b>	<b>Sheet (s)</b>	<b>Description of change</b>	<b>Alterations endorsed and</b>
1r0	05-10-2016	All	First release	SMN
1r1	09-07-2018	All	New brand	JF
<b>Procom Contacts:</b>				
Adnan Ahmad				
Director of Engineering			Customer service	
Phone: (+45) 48 27 84 84			Phone: (+45) 48 27 84 84	
Direct: (+45) 48 27 02 77				
<a href="mailto:aa@amphenolprocom.com">aa@amphenolprocom.com</a>			<a href="mailto:dksales@amphenolprocom.com">dksales@amphenolprocom.com</a>	

## List of Contents

1	Preface .....	4
2	Safety precautions .....	4
2.1	Environment .....	4
2.2	Protective earth.....	4
2.3	Equipotential bonding .....	4
2.4	Fuses.....	4
2.5	Power on/off .....	4
2.6	Reading this manual .....	4
3	Introduction .....	5
4	Circuit description .....	5
4.1	Amplifier/splitter modules.....	5
4.2	Power supply .....	6
4.3	Power supply backup function .....	6
5	Installation.....	6
5.1	Front view.....	6
5.2	Rear view.....	6
5.2.1	Rear view PRO-ARU4G.....	7
5.2.2	Rear view PRO-ARU8G.....	7
5.3	Connection of power supply voltage .....	7
5.3.1	Mains connection.....	7
5.3.2	Protective earth.....	7
5.3.3	DC power connection.....	7
5.4	Equipotential bonding .....	8
5.5	Connection of antenna.....	8
5.6	Connection of receivers .....	8
5.7	Mounting.....	8
6	Operating instructions .....	8
6.1	Power on LED.....	8
6.2	Maintenance .....	8
7	Trouble shooting .....	9
7.1	Spare parts.....	9
8	Technical Specifications.....	9
9	Block Diagrams.....	10
9.1	Block diagram PRO-ARU4G .....	10
9.2	Block diagram PRO-ARU8G .....	10

## 1 Preface

This user manual covers the Amphenol Procom Active Receiver Multicoupler models: PRO-ARU4G and PRO-ARU8G.

In the subsequent chapters, for the sake of clarity:

Where the descriptions are valid for both receiver multicoupler models, the figure in the model designation is replaced by "...", as example: PRO-ARU...G.

## 2 Safety precautions

This equipment is not suitable for use in locations where children is likely to be present.
---

### 2.1 Environment

The PRO-ARU...G is intended for indoor use only.

Do not allow the unit to be wet.

Do not operate the unit at temperatures outside the specified range -10 °C to +50 °C.

Do not place the unit in a corrosive environment.

### 2.2 Protective earth

The main earthing point is the center contact of the IEC60320-1 C14 mains power inlet. (See chapter 4.2 and 4.3.2)

Connection to protective earth is provided via the 3-wire IEC mains power cord.

As safety relies on connection to protective earth,  
*the PRO-ARU...G must be connected to an earthed mains socket-outlet.*

### 2.3 Equipotential bonding

It is strongly recommended that all interconnected conductive accessible parts in a system are connected to an equipotential bonding system.

The center terminal of the 3 pole screw terminal block on the rear side is intended for equipotential bonding. See chapter 5.4.

### 2.4 Fuses

Individual fuses are provided for both the mains voltage and the DC voltage.

The fuse holders are located on the rear side next to the supply voltage connectors.

On the top plate next to the fuse holders are marked the fuse specifications.

*To maintain the safety level, a blown fuse must be replaced by a fuse of equal size, type and value. Refer to chapter 7.1: "Spare parts".*

### 2.5 Power on/off

No power on/off switch is provided on the PRO-ARU...G.

Therefore, as soon as power is connected, the equipment will be immediately active and the green power on LED on the front plate will light, indicating power is on.

The mains power cord (mains plug or socket) serves as a mains switch and *either plug or socket of the cord must be easily accessible.*

### 2.6 Reading this manual

Before installing or replacing of the PRO-ARU...G, this entire manual should be read and understood. Incorrect installation and usage may damage the equipment.

### 3 Introduction

The typical function of an active receiver multicoupler is to distribute a received antenna signal to a number of receivers *without introducing any signal loss and interacting between the receivers*.

A passive power splitter *could* be used to split the antenna signal for the required number of receivers. However, this way each receiver will only get a part of the received signal power, and the sensitivity of the individual receivers will be reduced.

If an active low-noise receiver multicoupler is used for antenna signal distribution, an antenna signal virtually identical to the original one will be applied to each receiver, as if the particular receiver was directly connected to the antenna exclusively.

This manual contains description, installation and documentation of the Amphenol Procom types PRO-ARU4G and PRO-ARU8G, which are active receiver multicouplers with one input (ANT) intended for connection of RF signal (antenna signal) and 4 or 8 identical outputs (RX1 to RX4/8) intended to provide RF signal (antenna signal) for a similar number of individual receivers.

PRO-ARU...G series has a frequency range of 698 MHz to 2700 MHz and can be used at any frequency or frequency band within this range.

The PRO-ARU...G multicouplers can also be used for buffering and splitting any other kind of RF signal within the specified signal dynamic range of the equipment.

### 4 Circuit description

#### 4.1 Amplifier/splitter modules

The PRO-ARU...G multicoupler contains a dedicated RF amplifier system, and a power splitter circuitry corresponding to the particular number of outputs.

The amplifier system compensates for the n-way splitter loss + circuitry insertion loss. In both PRO-ARU4G and PRO-ARU8G, the ANT signal feeds an amplifier, which is provided with a 4-splitter- or 8-splitter circuitry at the output. The outputs from the splitter circuitry form the 4 or 8 identical RX outputs.

The power splitter circuitry is of the Wilkinson multi-section type and provides high isolation between the individual RX outputs, ensuring no mutual coupling between the connected receivers.

See chapter 9: Block diagrams.

The RF amplifier has low noise figure to ensure lowest possible signal-to-noise ratio deterioration of the distributed RX signal.

Simultaneously, the amplifier has very good large signal capabilities, in order to avoid intermodulation between strong signals in the distributed RF signal spectrum.

In order to maintain a high input dynamic range of the connected receivers (ability to withstand strong antenna signals), RF gain from ANT input to RX output is selected to be low, nominally +2 dB.

This gain value is factory adjusted and gain adjustment is not user accessible.

## 4.2 Power supply

The PRO-ARU...G is provided with a power supply unit which supplies DC voltage for the amplifier circuitry.

The power supply unit both has an AC mains voltage input for 230 – 240 VAC and a DC voltage input for 12 VDC or 24 VDC, depending on model.

The power supply is of the galvanically separated type, in order to avoid unwanted ground loops etc.

## 4.3 Power supply backup function

The power supply unit is provided with backup function.

If DC voltage (12 VDC or 24 VDC depending on model) from e.g. a rechargeable battery is connected to the multicoupler together with AC mains voltage, the DC voltage source will function as power backup.

If mains voltage is applied to the multicoupler, it will operate on the mains voltage and the DC voltage will be internally switched off.

If the mains voltage fails, the multicoupler will automatically switch over to operate on the DC voltage thus providing an uninterrupted service.

The multicoupler can also operate directly on the DC voltage, if no mains voltage is connected.

# 5 Installation

The PRO-ARU...G are housed in a standard 19 “ rack module.

## 5.1 Front view


The front plate is identical on both receiver multicoupler models.

The height of both PRO-ARU4G and PRO-ARU8G are 1HU (44.45 mm).

The front plate is provided with 2 pcs. 7 x 10 mm oval mounting holes in each side, intended for rack mounting of the multicoupler, using M6 screws.

Further, a green power on LED is provided.

Below is shown the identical front view of both models.

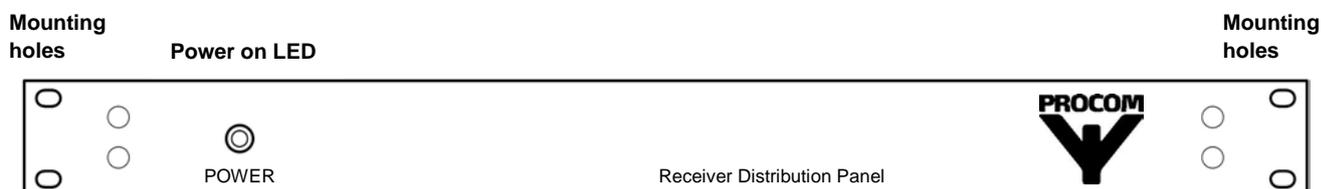


## 5.2 Rear view


The rear panel of the multicouplers is provided with ANT and RX RF connectors, mains power and DC power inlets, and holders for both mains and DC fuses.

Below is shown the rear view of the 2 multicoupler models:

### 5.2.1 Rear view PRO-ARU4G

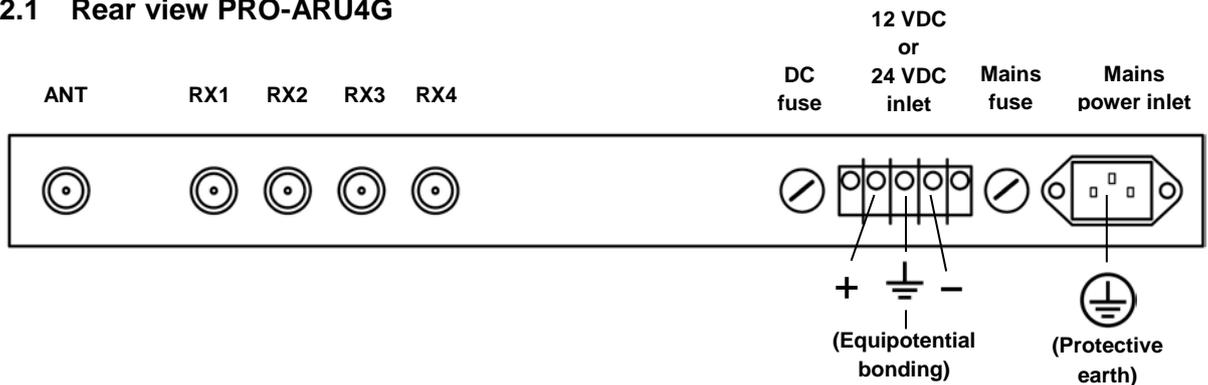

### 5.2.2 Rear view PRO-ARU8G

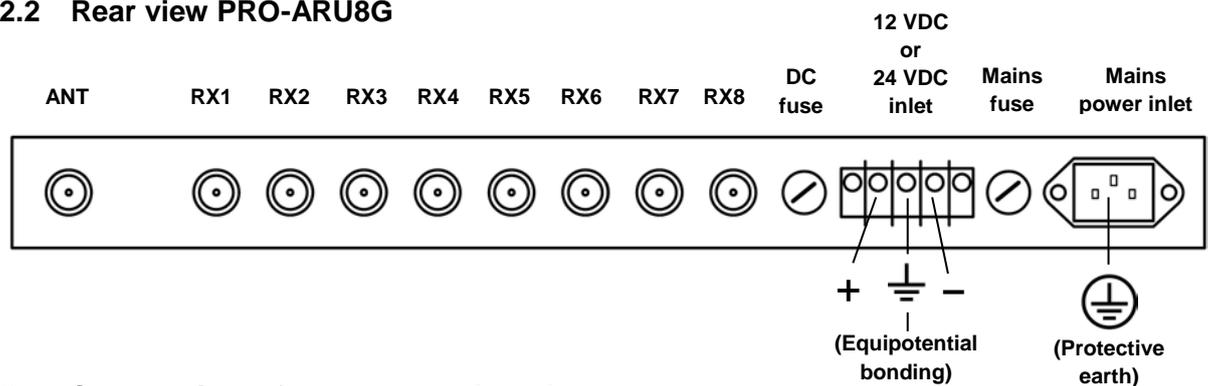

## 5.3 Connection of power supply voltage

### 5.3.1 Mains connection

The PRO-ARU...G is provided with a 3-terminal IEC60320-1 C14 (male) inlet for mains power connection. The mains inlet is located on the rear side. See rear view above. Applied mains voltage must be within the range 207 – 264 VAC (230 – 240 V  $\pm 10\%$ ).

A 3-wire IEC power cord must be used for mains voltage connection.

### 5.3.2 Protective earth

The main earthing point is the center contact of the mains power inlet. See PRO-ARU...G rear view above.

Connection to protective earth is provided via the 3-wire IEC power cord.


*The PRO-ARU...G therefore must be connected to an earthed mains socket-outlet.*

### 5.3.3 DC power connection

The PRO-ARU...G is provided with a 3 pole screw terminal block (DC inlet) for connection of 12 VDC voltage or 24 VDC voltage (depending on model). The terminal block is located on the rear side. See rear view above.

Applied DC voltage must be within the range 10.8 – 14.4 VDC (12 VDC model) or 18 – 28 VDC (24 VDC model).

On the top plate next to the screw terminal block are indicated the polarity of the screw terminals:



DC supply voltage (if used) must be connected correctly to the receiver multicoupler.

If the polarisation of the applied DC voltage is wrong, the DC fuse will blow.

The fuse must be replaced by a fuse according to chapter 7.1: "Spare parts".

#### 5.4 Equipotential bonding

The center terminal of the 3 pole terminal block marked  is intended for equipotential bonding.

It is strongly recommended that all interconnected conductive accessible parts in a system are connected to an equipotential bonding system, in order that no hazardous touch voltage appears on exposed conductive parts.

#### 5.5 Connection of antenna

The antenna (or other RF source) shall be connected to the input connector marked “ANT” on the rear edge of the receiver multicoupler top plate by means of a suitable coax cable.

*Be aware that the maximum RF input level of +20 dBm is not exceeded, in order to avoid damaging of the RF amplifier.*

As the ANT connector shield is connected to chassis, the coax cable shield will automatically be included in the equipotential bonding (if used).

#### 5.6 Connection of receivers

The individual receivers’ antenna inputs (RF inputs) shall be connected by a suitable coax cable to the output connectors marked “RX1 to 4” or “RX1 to 8” (depending on model) on the rear edge of the receiver multicoupler top plate.

If the receiver multicoupler has unused RX output ports, these should be terminated with a 50 Ω dummy load (min. 250 mW).

#### 5.7 Mounting

By rack mounting, screws must be mounted in all 4 mounting holes in the front plate.

When mounted in a fully enclosed cabinet, adequate ventilation or heat path shall be provided in order to keep the housing surface temperature below 50 °C.

## 6 Operating instructions

As soon as mains supply voltage or DC supply voltage is applied to PRO-ARU...G, it will be immediately active.

Normal operational conditions do not require any adjustments or settings of the multicoupler.

#### 6.1 Power on LED

When power is connected to the PRO-ARU...G, the green power on LED on the front plate will immediately light and indicate the multicoupler is active.

#### 6.2 Maintenance

No maintenance of the PRO-ARU...G is normally needed.

However, if any malfunction of the multicoupler occurs, please refer to chapter 7: “Trouble shooting” below.

If the instructions in the Trouble shooting chapter is insufficient, please contact nearest Amphenol Procom dealer or Amphenol Procom for further information.

## 7 Trouble shooting

Symptom	Possible cause	Action
Power on LED off	Supply voltage not connected or off.	Connect supply voltage.
	By DC voltage operation, wrong DC polarity.	Check DC voltage and polarity and reverse connections if necessary.
	AC or DC fuse blown.	Check and replace fuse(s).
Symptom	Possible cause	Action
Reduced receiver sensitivity	Supply voltage not connected or off.	Connect supply voltage.
	AC or DC fuse blown, power on LED off	Replace fuse(s).
Other fault symptoms		Contact Amphenol Procom

### 7.1 Spare parts


Article	Value	Amphenol Procom Spare part no.
Fuse for 230 VAC	T315mAL250V 5x20 mm	661001008
Fuse for 12 VDC/24 VDC	T2AL250V 5x20 mm	661000047

## 8 Technical Specifications

Please refer to the PRO-ARU...G datasheet on [www.amphenolprocom.com](http://www.amphenolprocom.com)

## 9 Block Diagrams

### 9.1 Block diagram PRO-ARU4G

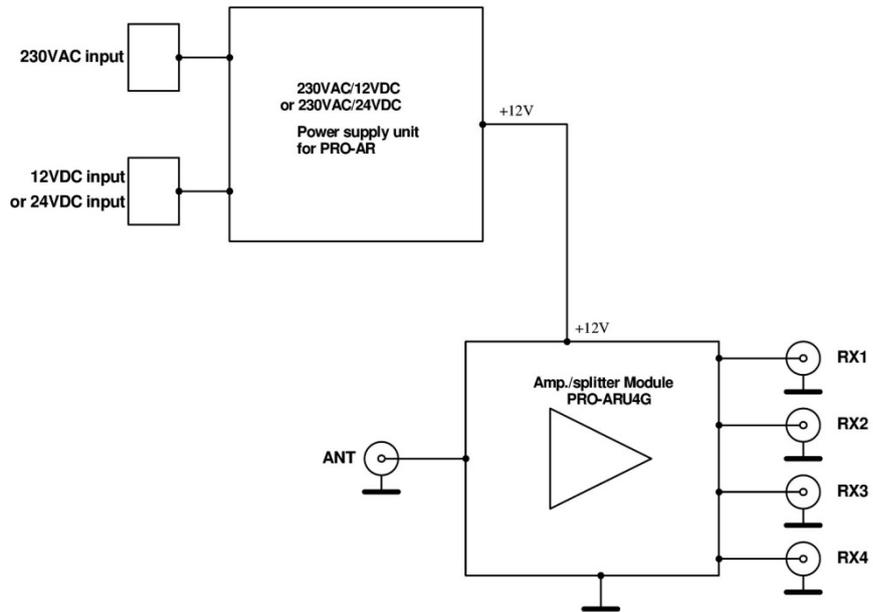

### 9.2 Block diagram PRO-ARU8G

