

Care and Maintenance

When batteries of different brand or type are used together, or new and old batteries are used together, some batteries may be over-discharged due to a difference of voltage or capacity. This can result in venting, leakage, and rupture and may cause personal injury.

- Replace the battery if a clock does not operate or steadily loses time.
- Always purchase the correct size and grade of battery suitable for the intended use.
- Do Not Mix Old and New Batteries.
- Do Not Mix Alkaline, Standard, or Rechargeable Batteries.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the battery is installed correctly with regard to polarity (+ and -).
- Remove the battery from product during periods of non-use. Battery leakage can cause corrosion and damage to this product.
- Remove a used battery promptly.
- For recycling and disposal of the battery, and to protect the environment, please check the internet or your local phone directory for local recycling centers and/or follow local government regulations.

Warranty and Support

This product is warranted to be free from defects in material and workmanship under normal use and service for a period of two years. Per the Song-Beverly Act, in the state of California, the warranty on this item becomes effective on the date of delivery. The warranty will not apply to defects resulting from abuse, accidents, or misuse. If a defect that is covered by this warranty arises during the warranty period, promptly return the clock (postage prepaid) with proof of purchase showing the date the clock was purchased to the following address and such defects will be repaired, or the products will be replaced at La Crosse Clock Company option without charge.

La Crosse Clock Company
Warranty Department
2830 South 26th Street.
La Crosse, WI 54601

Online Support: bit.ly/425-34188_support

Patents: www.lacrossetechnology.com/pages/patents

Scan for Support



LET'S BE SOCIAL!

Ask questions, watch set up videos, and provide feedback on our social media outlets. Follow La Crosse Technology on YouTube, Facebook, and Instagram.



⚠ WARNING: This product can expose you to chemicals including acrylonitrile, 1, 3-butadiene, and styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to: www.P65Warnings.ca.gov

Made in China - Printed in China DC: 041226


LA CROSSE
CLOCK CO.

Dual-sided Pedestal Clock



Model: 425-34188

WHAT'S INCLUDED

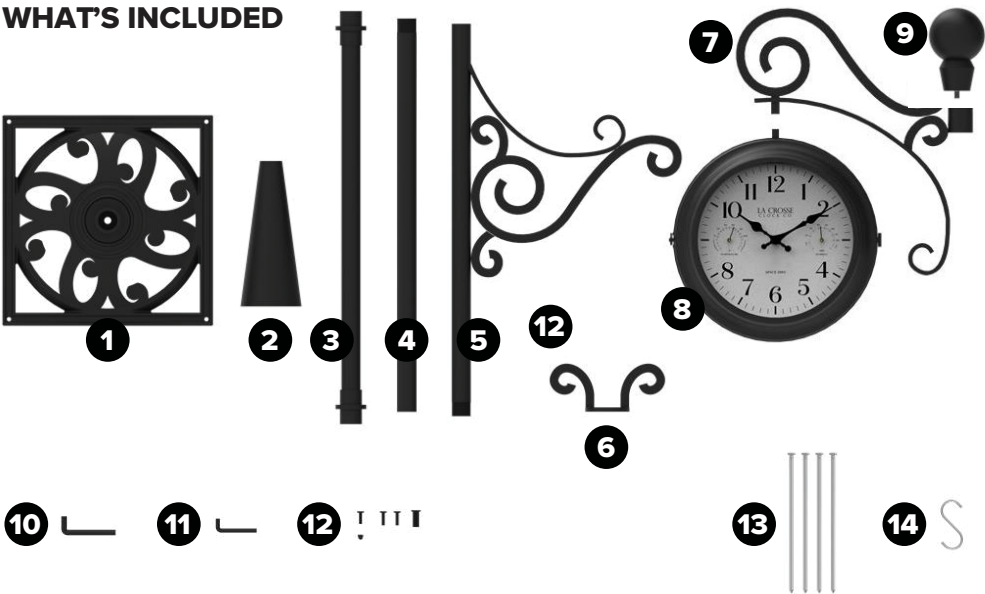

1. Cast Iron Base

2. Base Connection Cover

3. Threaded Base Pole

4. Extension Pole

5. Upper Support Pole
6. Accent Scroll

7. Clock Mounting Bracket

8. Dual-Sided Clock

9. Finial

10. Large Allen Wrench
11. Small Allen Wrench

12. Hardware (3 Small Bolts, 1 Large Bolt, and 1 Small Bolt Cover)


13. Accessory S Hook (optional)

14. 4 Mounting Nails (optional)

Clock Setup

1. Lift the latch on the Dual-Sided Clock (7) and insert 1 AA battery into each clock's Movement.

2. Turn their Time Set Wheels to match your time and close the latch.

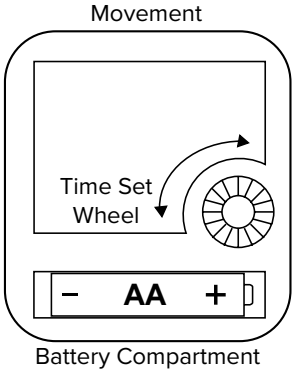

Thermometer and Hygrometer: Please allow 24 hours for these mechanical, self-adjusting elements to acclimate to your environment. No batteries required.

Assembly

1. Attach the Threaded Base Pole (3) to the Cast Iron Base (1) with the Large Bolt (12). Use the Large Allen Wrench (10) to tighten.

2. Slide the Base Connection Cover (2) over the Threaded Base Pole.

3. Attach the Extension Pole (4) to the Threaded Base Pole (3) and turn clockwise to tighten.

4. Slide the Accent Scroll (6) over the top of the Extension Pole (4).

5. Attach the Upper Support Pole (5) to the Extension Pole (4) and turn clockwise to tighten. When secure, turn the Accent Scroll (6) to align with the Upper Support Pole (5) design.

6. Attach the Dual-sided Clock (8) to the Clock Mounting Bracket (7) using 1 Small Bolt (12) and the Bolt Cover (12). Use the Small Allen Wrench (11) and turn clockwise to tighten.

7. Attach the Finial (9) to the top of the Clock Mounting Bracket (7) and turn clockwise to tighten.

8. Slide the Clock Mounting Bracket (7) over the Upper Support Pole (5). Use two Small Bolts (12) and the Small Allen Wrench (11) and turn clockwise to secure.

9. Transporting vertically, place the Pedestal Clock in your desired location.

Optional:

- Use the 4 Large Nails (14) to secure the base to a solid foundation.

• Install the included “S” hook (13) on the end of the Metal Scroll Work Pole to hang a planter.

SPECIFICATIONS

Time Digit Height: 0.93-in (2.35 cm)
Movements: Quartz – Step Motion
Lens Type: Glass
Numerals: Arabic (1-2, 4-8, 10-12)
Temperature Range: 0°F to 100°F
Humidity Range: 20% to 80% RH
Construction: Glass, Metal, Plastic
Weather Resistant: UV Protected Dial, Lens, and Case
Placement: Indoor/Outdoor
Mounting Type: Free Standing
Power Requirements: 2 “AA” Alkaline Battery (Not Included)
Battery Life: 12+ Months
Clock Face Dimension: 7.05-in (17.9 cm) Diameter
Clock Dimensions: 9.50 in (24.13 cm) Diameter, 3.13 in (7.0 cm) Depth
Pedestal Clock Full Dimensions: 28.74 in L x 11.81 in W x 72.04 in H
(73 cm L x 30 cm W x 183 cm H)