

LA CROSSE®  
TECHNOLOGY

# Remote Sensor Temperature/Humidity




SET UP GUIDE

MODEL: LTV-TH2

## Power Up


1. Slide the Battery Cover down to remove.
2. Insert 2 - AA batteries into the sensor according to polarity markings.
3. Replace the Battery Cover.

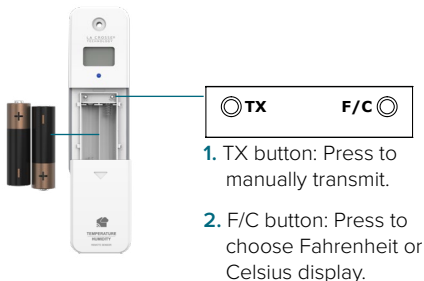

## Connect to the La Crosse View™ App

If you already own a La Crosse View connected Weather Display or Bridge Gateway, you can use your La Crosse View App to monitor your Sensor and Probe Wire readings right on your phone.

1. Open your La Crosse View app. On the Main Menu, select **ADD DEVICE**.
2. Scan the Barcode on your Sensor or type in the Device ID manually.
3. Confirm the sensor image and Device ID and add a Device Name and Location Name. Select **DONE**.



## Flexible Mounting Options

With a Temperature range from -40°F to 140°F (-40°C to 60°C) and a humidity range from 10% RH to 99% RH, this versatile sensor may be used in multiple locations. Transmission Range is 400 feet (121 m).

**Mount the sensor vertically** with the integrated hole in the top of the sensor. This allows any moisture that may accumulate to empty through the drain holes at the bottom of the sensor.

**Outdoors:** Mount your sensor on a north facing wall or in a shaded area. Under an eave or deck rail is preferred to avoid inaccurate readings from the sun.

**Garage:** Place sensor away from window and door frames, and out of sunlight that may stream in.

**Basement/Attic:** Perfect for your basement or attic. Monitor conditions to prevent mold growth.

**Baby's room:** Keep the optimal temperature/humidity for your child to sleep.

**Refrigerator/Freezer:** Never lose food to spoilage. Ensure longevity and freshness by remotely monitoring temperatures with your sensor and the La Crosse View® app.

**Greenhouse:** Optimize plant growth by monitoring temperature and humidity levels.

# SPECIFICATIONS

**Remote Temperature Range:** -40°F to 140°F (-14°C to 60°C)

**Accuracy (normal operating conditions):**  $\pm 1.8$  degrees Fahrenheit 14°F to 122°F (0°C to 50°C)


**Remote Humidity Range:** 10 to 99%RH

**Accuracy (normal operating conditions):**  $\pm 5\%$  RH (@25°C , 20%RH to 90%RH)

**Transmission Range:** 400 feet (121 Meters)

**Power Requirements:** 2 “AA” Batteries (Not included)

**Dimensions:** 1.97 in L x 0.77 in W x 5.71 in H (5.00 cm L x 1.95 cm W x 14.50 cm H)

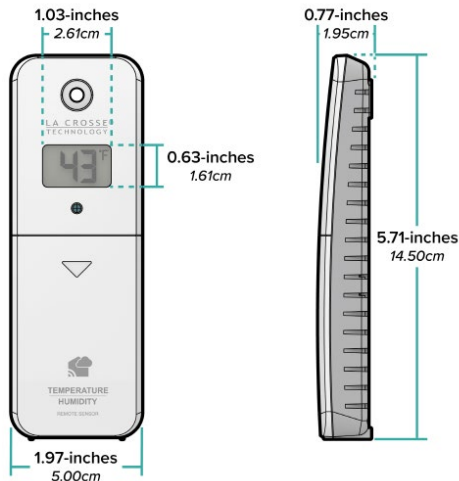

## We're Here to Help

If you require additional assistance, get in touch with our friendly customer support team based in La Crosse, WI.

**Self Help:** [bit.ly/ltv-th2\\_support](https://bit.ly/ltv-th2_support)

**Online:** [bit.ly/contact\\_techsupport](https://bit.ly/contact_techsupport)

**Phone:** 1.608.782.1610

Our knowledgeable customer support team is available:  
Mon-Fri 8am-6pm CST

## Stay in Touch!

Ask questions, watch set up videos, and provide feedback on our social media outlets. Follow La Crosse Technology on Youtube, Facebook, and Instagram.



## Warranty & Patents

La Crosse Technology, Ltd. provides a **1-year limited time warranty** on this product relating to manufacturing defects in materials & workmanship. In accordance with the Song-Beverly Act, in the state of California, the warranty on this item becomes effective on the date of delivery. La Crosse Technology, Ltd, 2830 S. 26th St. La Crosse, WI 54601

For Full Warranty Details, Visit: [www.lacrossetechnology.com/pages/warranty](https://www.lacrossetechnology.com/pages/warranty)

Patents: [www.lacrossetechnology.com/pages/patent](https://www.lacrossetechnology.com/pages/patent)



**WARNING:** This product can expose you to chemicals including acrylonitrile, 1,3-butadiene, and styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to: [www.P65Warnings.ca.gov](https://www.P65Warnings.ca.gov)

SCAN HERE  
Additional Info  
and Support



# Care & Maintenance

## Battery Replacement Instructions

When batteries of different brand or type are used together, or new and old batteries are used together, some batteries may be over-discharged due to a difference of voltage or capacity. This can result in venting, leakage, and rupture and may cause personal injury.

- Do Not Mix Old and New Batteries.
- Do Not Mix Alkaline, Standard, or Rechargeable Batteries.
- Always purchase the correct size and grade of battery suitable for the intended use.
- Clean the battery contacts and those of the device prior to battery installation.
- Ensure the batteries are installed correctly with regard to polarity (+ and -).
- Remove batteries from product during periods of non-use. Battery leakage can cause corrosion and damage to this product.
- Remove used batteries promptly.
- For recycling and disposal of batteries, and to protect the environment please check the internet or your local phone directory for local recycling centers and / or follow local government regulations.

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**All rights reserved.** This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.