

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 527456OLW
CONVERTIBLE FLUSH MOUNT / CHANDELIER

I M A G E



FLASH MOUNT VERSION



PENDANT VERSION

If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plait appel pour l'assistance.

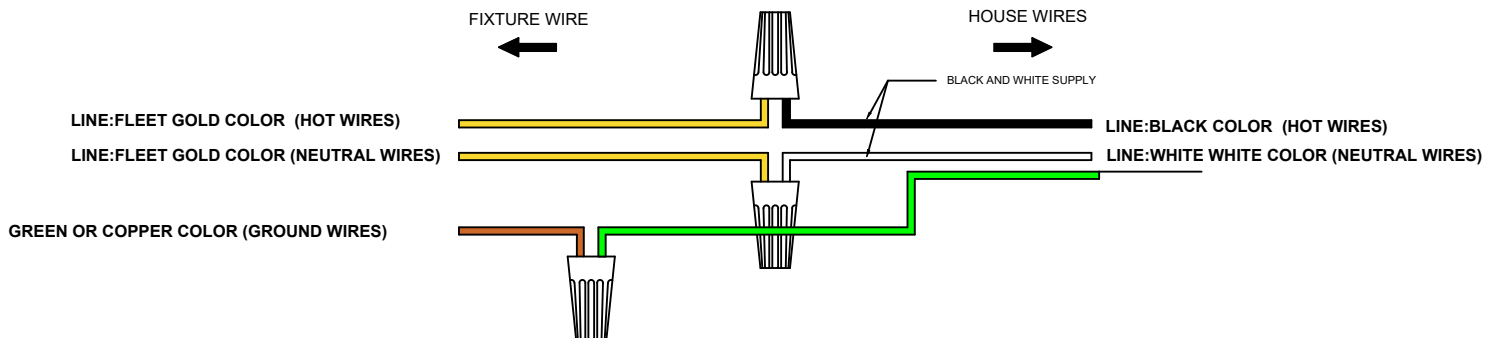
Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Si vous n'êtes pas familier avec le câblage électrique, appelez un électricien qualifié pour installer cet appareil. Plus d'une personne peut être nécessaire d'installer appareil, assurez vous que vous disposez de l'aide assez qualifié.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.

WIRING DIAGRAM




ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 527456OLW
CONVERTIBLE FLUSH MOUNT / CHANDELIER

KNOCK DOWN ASSEMBLY

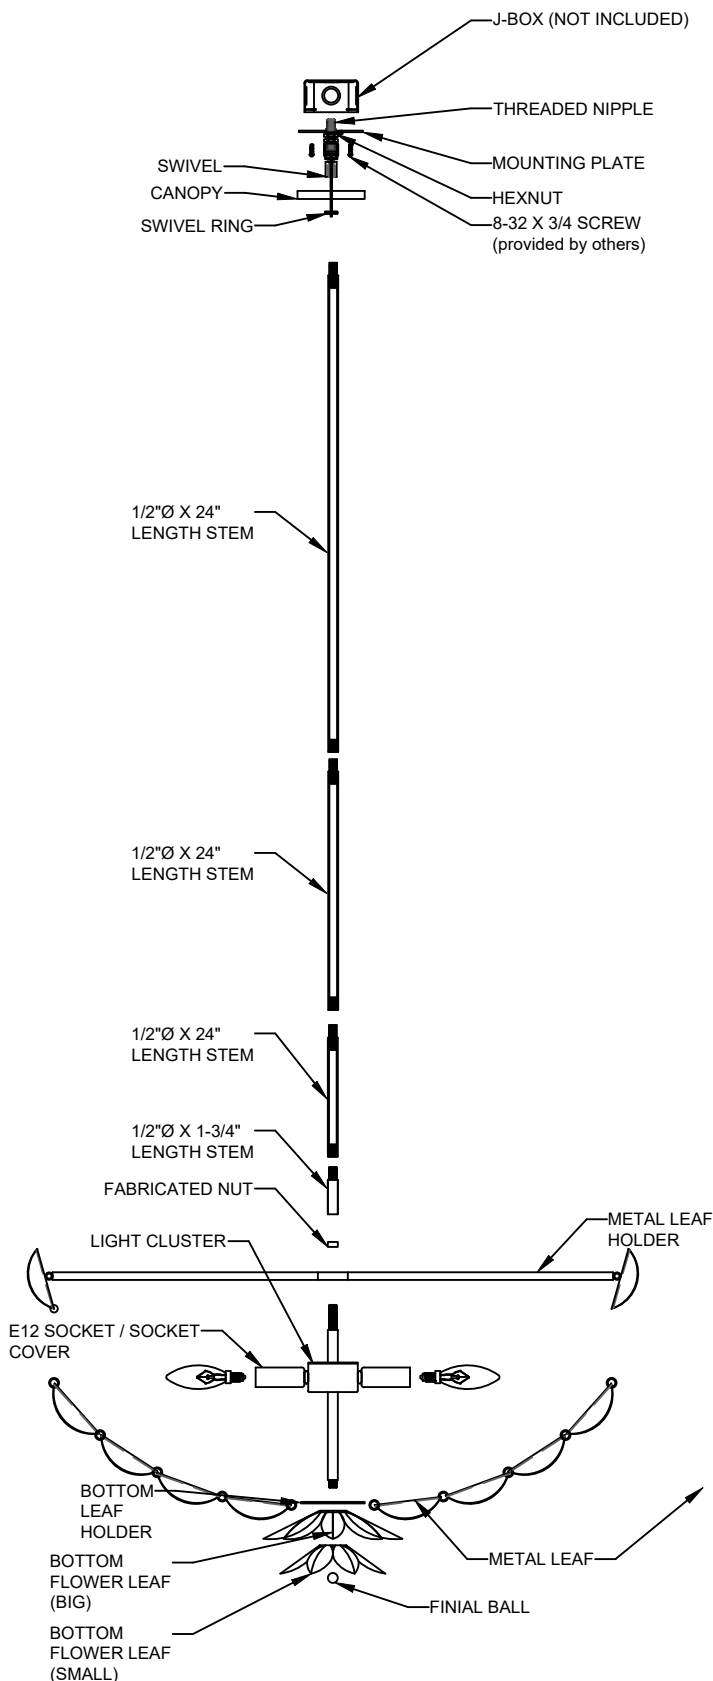- STEP 1:** Carefully remove all parts from the box and lay them on a soft clean surface. Check to ensure no parts are missing.
- STEP 2:** Assemble the **Mounting Plate** with the **Threaded Nipple**, **Star Washer** and **(2) Hex nuts**. Attach the **Swivel** and remove the **Swivel Ring**.
- STEP 3:** Install the mounting assembly to the **j-box** using **(2) 8-32 X 3/4 screws (provided by others)**. Place the **canopy** onto the assembly. The face of the canopy should be located at about the center of the threaded section.
- STEP 4:** After determine the **canopy** height remove the **swivel ring** and **canopy**. Tighten the bottom **hex nut** to lock the position of the **Swivel** and tighten the top **hex nut** to lock the position of the **Mounting Plate**.
- STEP 5:** Unscrew the **8-32 x 3/4 screw (provided by other)** to remove the mounting plate.
- STEP 6:** Attached the **light cluster** to the **metal leaf holder** and secure it using **fabricated nut** (provided).
- STEP 6:** Determine the total fixture height requirement and use the right length of **center stem** to achieve. .
- Note:** If the fixture was intended to be semi-flush use the **1/2"Ø X 1-3/4" STEM** stem only.
- STEP 7:** Insert the **swivel ring** and **canopy** to the **center stem** going down to the top on shade holder.
- STEP 8:** Carefully pass the wire through to the **swivel** with **canopy**, and attached it to the center stem.
- STEP 9:** Carefully lift the fixture and install the **mounting plate** to the **j-box**.




ASSEMBLY & INSTALLATION INSTRUCTIONS


MODEL: 527456OLW
CONVERTIBLE FLUSH MOUNT / CHANDELIER

ELECTRICAL / MOUNTING INSTALLATION

- STEP 10:** Refer to wiring diagram. With wire carefully thread through the swivel, connect the **black color supply wire (HOT WIRES)** to the **fleet gold color wire** of fixture wire with **wire connector**, connect the **white supply wire (NEUTRAL WIRE)** to the **fleet gold color wire** fixture wire with **wire connector**.
- STEP 11:** Carefully tuck all wires into outlet box ensuring that there are no wires pinched between the **canopy** and ceiling and cut the excess wire that will be not use.
- STEP 12:** Install (6) E12 Bulbs , do not use bulbs the will exceed 40 watts.
- STEP 13:** Carefully install the metal leaf strand to the metal leaf holder and bottom leaf holder.
- Note:** Carefully bend the cut part of split ring before inserting on the small pin hole.
- STEP 14:** Install the **Big Flower leaf** and **Small Flower leaf** with the **bottom leaf holder** and secure it using the **metal ball finial**.



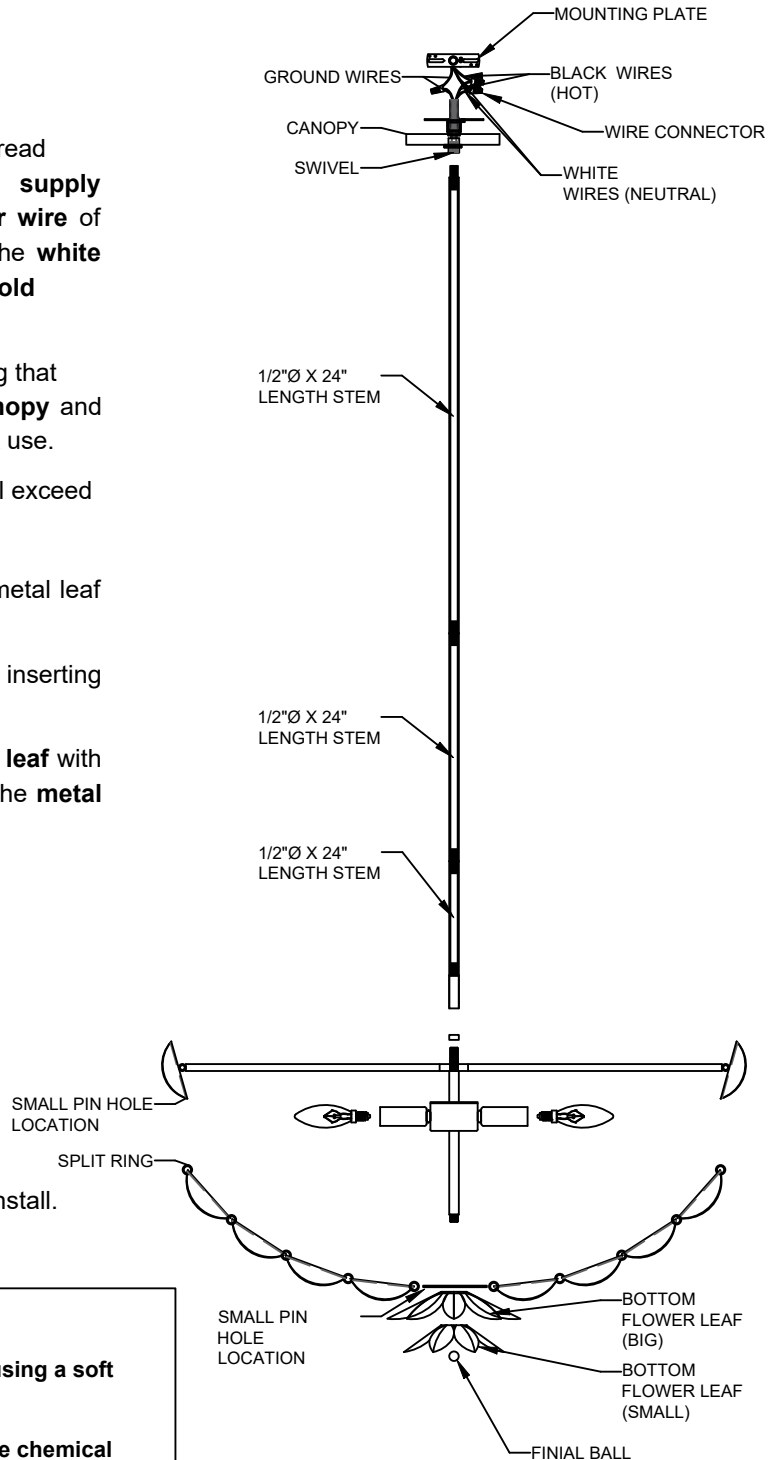Note: Slightly open the ring gap to install.












FOR LIGHTING MAINTENANCE:

- **Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.**
- **Refrain from using harsh cleaning liquids that may cause chemical reaction on the hand painted finishes.**
- **Always refer to the Assembly Instruction before removing any components.**
- **HANDLE WITH CARE.**

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 527456OLW
CONVERTIBLE FLUSH MOUNT / CHANDELIER

PARTS LIST

PART NO.	PARTS NAME	IMAGE/DRAWING	QTY
KS-A-56	Mounting Plate (1/4IP THREAD)		1 pc
	Hex Nut (1/4IP THREAD)		2 pcs
	Washer (1/4 IP)		2 pcs
	Threaded Nipple 1/4IP THREAD (1/2" Ø X 2 1/2" L.)		1 pc
	Strain Relief (1/8 IP)		2 pcs
CS-BS-1	Canopy (6 1/2" Ø X 3/4" HT X 1" Ø CENTER HOLE)		1 pc
LS-A-386	Swivel (15/16 DIA X 2-3/16 HT X 1/2 FINED THREAD 90 DEG.)		1 pc
LS-A-423	Center Stem (1/2 IN. R.T) 6 IN. HT. W/ 5/8 IN. LENGTH FINE THREAD		1 pc
LS-A-424	Center Stem (1/2 IN. R.T) 12 IN. HT. W/ 5/8 IN. LENGTH FINE THREAD		1 pc
LS-A-425	Center Stem (1/2 IN. R.T) 24 IN. HT. W/ 5/8 IN. LENGTH FINE THREAD		1 pc
CS-RT-37	Center Stem (1/2 IN. R.T) 1-3/4 IN. HT. W/ 5/8 IN. LENGTH FINE THREAD		1 pc
MS-ST-13A	Bottom Leaf Holder 4" DIAMETER W/ 13 PCS SMALL HOLE		1 pc
	Metal Leaf		30 SET
MS-ST-7	LEAF L60MM X H86MM X T1.0MM WITH 2PCS-D2MM HOLE		
MS-ST-8	LEAF L57MM X H86MM X T1.0MM WITH 2PCS-D2MM HOLE		
MS-ST-9	LEAF L41MM X H86MM X T1.0MM WITH 2PCS-D2MM HOLE		
MS-ST-10	LEAF L22MM X H86MM X T1.0MM WITH 2PCS-D2MM HOLE		
	Big Flower Leaf 6" Diameter x 1-1/8" Ht.		1 pc
	Small Flower Leaf 5" Diameter x 1" Ht.		1 pc
MS-BL-102	Metal Ball Finial SOLID BALL D3/4 IN x 3/8 FINE THREAD		1 pc