


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

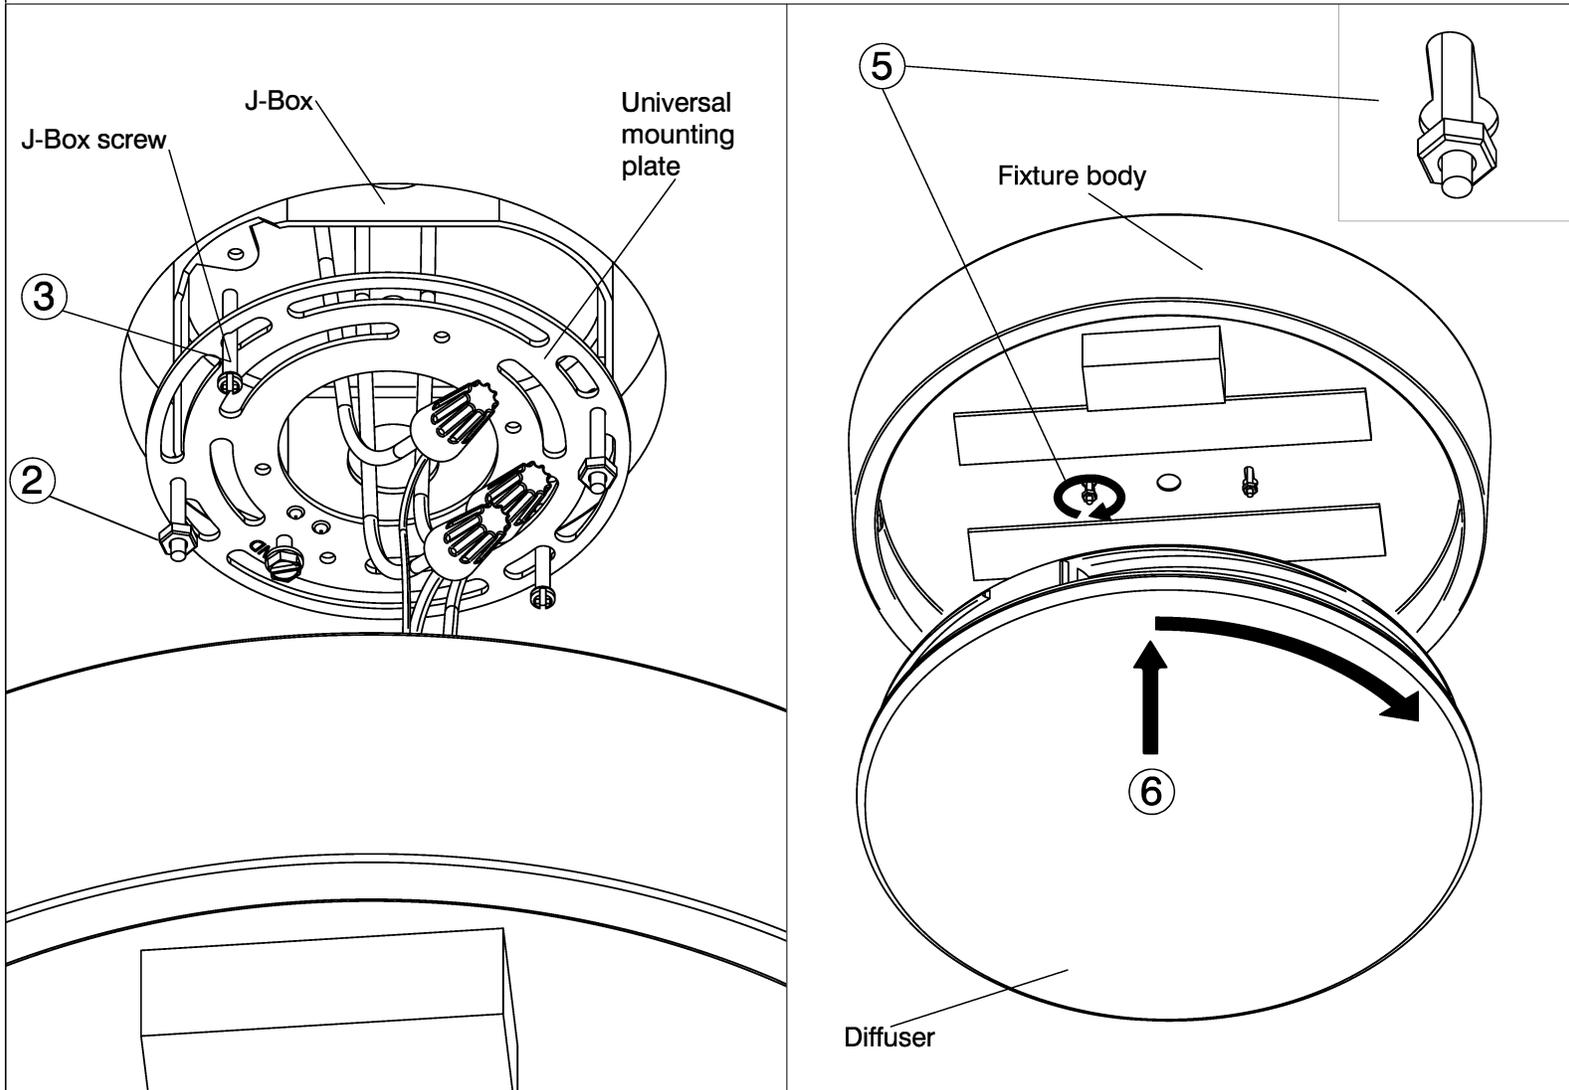

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
2. Install a nut and bolt to each slot of the universal mounting plate loose like shown.
3. Install universal mounting plate to j-box securely with j-box screws.
4. Make wire connections: Attach ground wire to building ground wire using a wire nut or attach them to the mounting plate with a green ground screw.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Wire positive wire with positive wire, negative wire with negative wire. Double check wiring. Tuck the wire connections neatly into the junction box.
5. Install fixture body to universal mounting plate by guiding fixture key slot holes over the two nuts and bolts from step two. Turn the fixture to lock in the nut to help keep the fixture from falling while the nuts are tightened. Tighten nuts until the fixture is secure against the ceiling and cannot be turned easily.
6. Install diffuser by carefully lifting glass into fixture and turning clockwise until it stops. Fixture **Journey Ceiling mount** should not move. If fixture moves, check and repeat step 5 then repeat step 6.
7. Restore power.

OXYGEN LIGHTING ©

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS

Journey Ceiling mount
120-277v **3-623-xx**
120-277v **3-624-xx**