

# Assembly Instruction Sheet #3-808-15 & 40

## For Style 3-808-15 & 40

**Tools Required:** Flathead screwdriver, Phillips screwdriver, Pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (1) LED 22W Maximum (Included).

**Estimated Assembly Time:** 15-30 minutes.

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagram below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture.


We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

### Package Contents


Before this step there should be take off the bubble mailer.

- AA** Fixture body x 1
- BB** Mounting plate x 1
- CC** CCT controller x 1

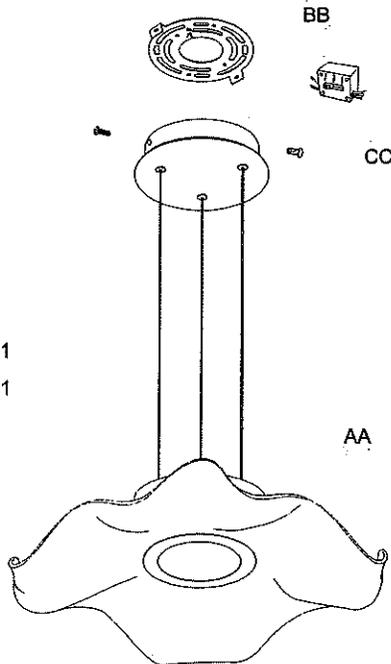


### STEP 1

Unlock the mounting screws(GG) from the mounting plate(BB), remove the mounting plate(BB) from the fixture body(AA).

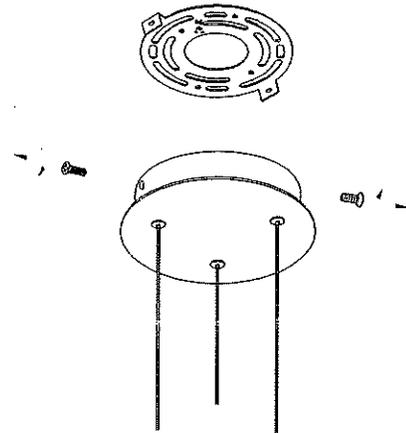


### Hardware Contents

PART	DESCRIPTION	QUANTITY
DD	Wire Nut	3 pcs
EE	Outlet Box Screw	2 pcs
FF	Green Ground Screw	1 pc
GG	Mounting Screw	2 pcs

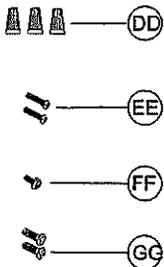


### STEP 2

Attach the mounting plate(BB) to the junction box (not included) with two outlet box screws(EE) provided.

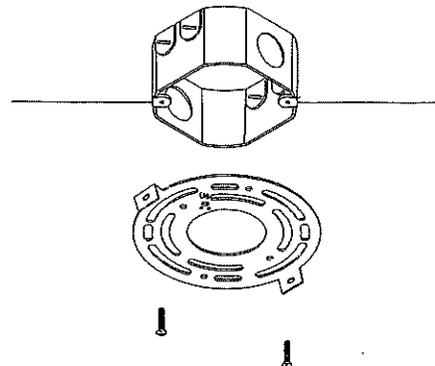


### STEP 3

- Connect the ground wire from the branch circuit to the green ground screw (FF) on the mounting plate (BB) and add 6 in. for the ground connection.
- Connect the fixture wire as follows:

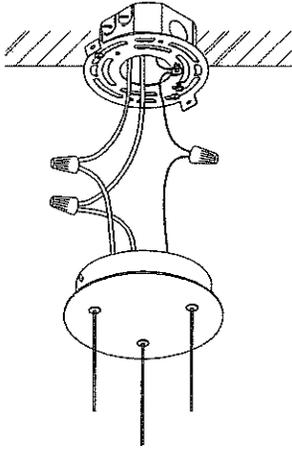


### STEP 5

- Press the wire restraint (included) to adjust the desired length of cable.
- Attach the fixture body (AA) to the mounting plate (BB), Align the the holes on the canopy with those on the side of the mounting plate (BB) and secure with the mounting screws (GG).

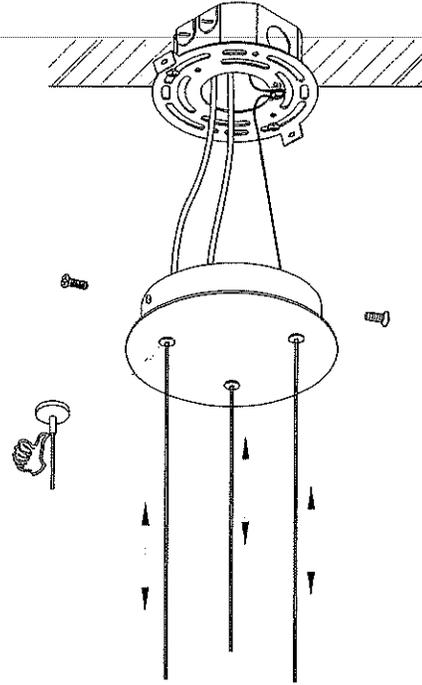

### STEP 4

Adjust the CCT controller (CC) to the corresponding position according to you preference. this product supports 3000K, 3500K, 4000K three color temperature.

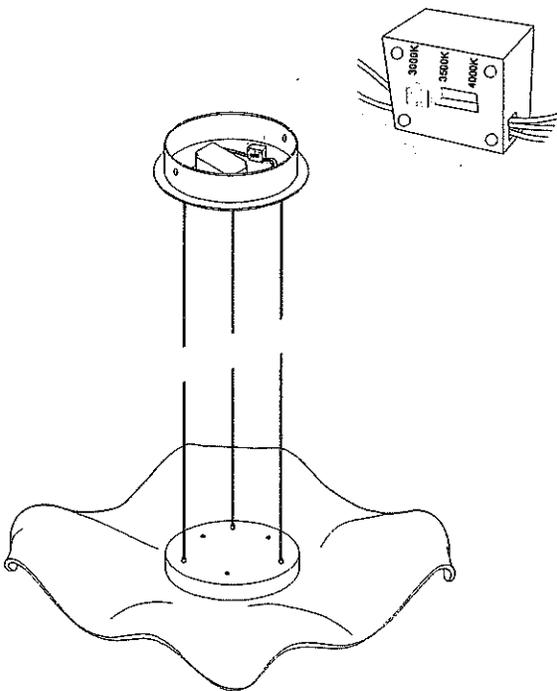

### STEP 6

