


# ASSEMBLY AND INSTALLATION INSTRUCTIONS


**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.**

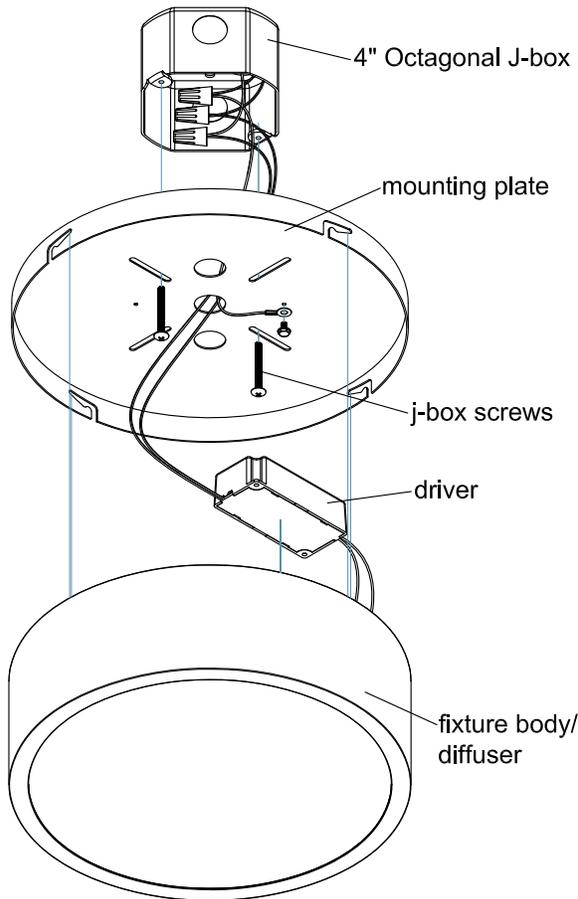


## Alternate Mounting Options


4" Square J-box  
with Single Device Mud Ring



2"x3" J-box



4" Square J-box



## Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation. Remove mounting plate from housing by rotating the mounting plate counter-clockwise.
2. Feed wiring from the ceiling through the center hole in the mounting plate and secure the mounting plate to the j-box using j-box screws. If needed, use sheetrock anchors to help secure mounting plate.
3. Make wire connections. Refer to driver label for wire identification. Attach ground wire to building ground wire using a wire nut.
  - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box.
  - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Connect neutral wire (white) with neutral wire, hot wire (black) with hot wire. Double check wiring.
4. Carefully tuck wire connections neatly into the junction box.
5. Place fixture body/diffuser over the mounting plate, making sure to line up the slots in the mounting plate with the posts on the fixture body. Turn the fixture body clockwise to secure the fixture body to the surface.
6. Turn power back on at fuse or circuit box.

**PEEPERS** ceiling mount  
**32-601-XX**

OXYGEN LIGHTING ©

**oxygen**

OXYGEN LIGHTING  
201 RAILHEAD RD, FORT WORTH, TX 76106  
TEL. (877) 607-0202 FAX (877) 607-0203  
WWW.OXYGENLIGHTING.COM

**ASSEMBLY INSTRUCTIONS**