



LADDER STRAPS MANUAL

The Jameson wrap-around Ladder Straps secure ladders to utility poles or trees, reducing slip and sway and are rated for up to 350 lb per strap. They come with adjustable buckles for a tight, customized fit on various ladder sizes, making for a fast, tool-free setup. Made from durable, weather-resistant materials, they're built to withstand any conditions for added safety and confidence.

The following pages contain graphic instructions on how to use and maintain your ladder straps.

Part Number	Description
24-701	Ladder Strap Kit
LS001001	Ladder Strap, 10' Red, intended for top ladder use.
LS001002	Ladder Strap, 26' Green, intended for bottom ladder use.
B-LS1	Mesh bag for ladder straps



Scan to learn more

MADE IN USA



Ladder Strap Kit 24-701

WARNING

- Wear head, eye and hands protection that meet ANSI standards
- Maintain secure footing and balance.
- Do not use with or near energized lines
- Use only as indicated



INSTALLATION INSTRUCTIONS - GREEN BOTTOM STRAP (LS001002)



STEP 1

Lean the ladder securely against the pole or tree with the feet flat and rails even, then use a leveler if needed.



STEP 2

Open the mesh storage bag and remove the straps, then extend the ladder strap and find the buckle and short-strap hook.



STEP 3

Wrap the hook end of the strap around the ladder. Wrap the hook end around the ladder leg about 5' up (between the 4th and 5th rungs), with the buckle/D-ring facing out and the strap flat (not twisted).



STEP 4

Clip the hook into the D-ring.



STEP 5

Loop the strap around/behind the pole.




STEP 6

Loop the strap all around the pole and behind it a second time.



STEP 7

Adjust the cam buckle/D-ring so it sits close to the ladder, but does not extend past it. Then wrap the hook end around the ladder as described in Step 3 above.

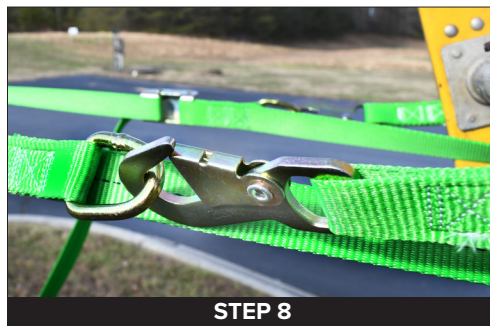

STEP 8

Clip the hook into the D-ring



STEP 9A

Pull the long strap to tighten, and position the strap as follows: The strap between the ladder and the pole should be as horizontal as possible.



STEP 9B

The strap behind the pole should cross itself forming an "X".



STEP 9C

The strap section securing the ladder should not be twisted or caught with any part of the ladder that would prevent it from being taut.



STEP 10

Stand in front of the ladder and gently shift it a few times to confirm it is stable and does not move. Then climb to the third rung and repeat the stability check.

INSTALLATION INSTRUCTIONS - RED TOP STRAP (LS001001)



STEP 11


Retighten the straps as necessary. The strap should remain tight and the ladder should not move more than 2". Check tightness every time you climb back up.



STEP 1

The red/top strap is to be installed in a similar manner, at the top of the ladder. Wrap the short strap around the ladder legs, just below the top rung.

BREAK-DOWN INSTRUCTIONS

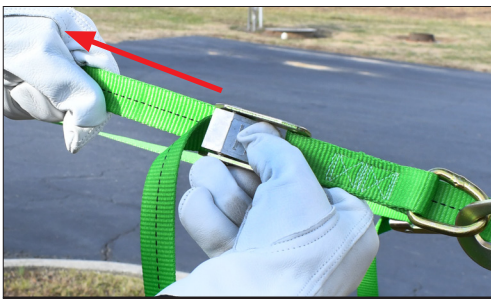

STEP 1

Press the button on the buckle and pull the long strap towards the pole to create slack.



STEP 2

Unclip both hooks.



STEP 3

Roll up the straps, place in the mesh bag, and store in a dry location.