



Precision Torque Splines


Specifications

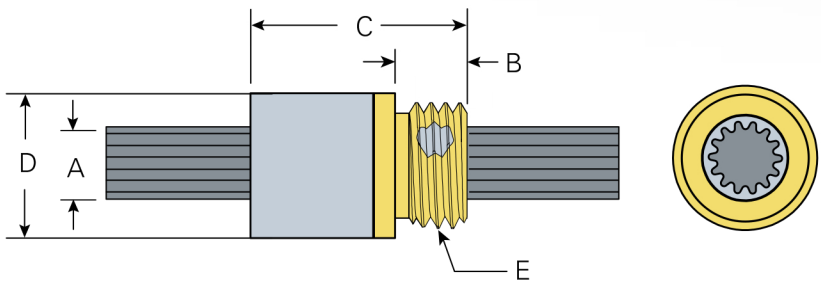

with Thread Mount Bushing

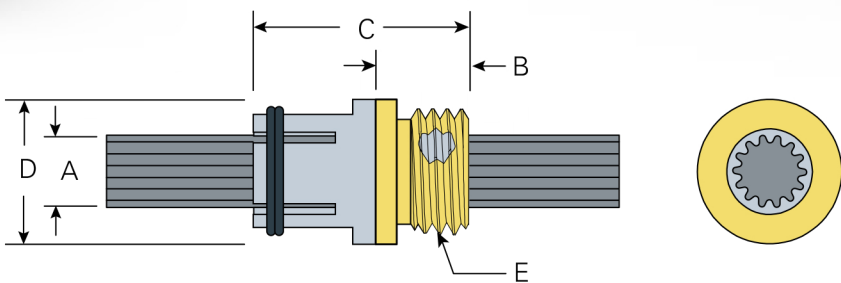

with Anti-Backlash Thread Mount Bushing

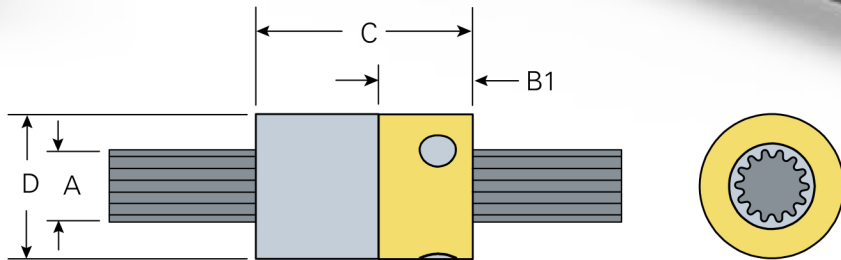

with Cylindrical Bushing

Rail Diameter	Shaft Diameter A		Root Diameter		Equivalent Diameter		Thread Length B		Mounting Surface Length B1		Bushing Length C		Bushing Diameter D		Mounting Thread E
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
Tolerances	± .002	± 0.05	± .002	±0.05	± .002	± 0.05	.005	±0 .13	± .015	± 0.38	± .015	± 0.38	± .001	±0.05	
1/4"	.250	6.4	.202	5.1	.226	5.7	.235	6.0	.325	8.26	.750	19.1	.500	12.7	7/16-20 UNF
3/8"	.375	9.5	.306	7.8	.343	8.7	.360	9.1	.333	.333	1.000	25.4	.625	15.9	9/16-20 UN
1/2"	.500	12.7	.419	10.6	.460	11.7	.485	12.3	.625	.625	1.500	38.1	.813	20.6	3/4-20 UNEF