

Eco Style

DC 52"

A contemporary three blade design which complements modern decor, both inside and outside the home.

White
No Light

F4010/101B



White/Beechwood
No Light

F4010/121B



Black
No Light

F4010/202B



Black/Koa
No Light

F4010/205B



White
CCT LED

F4011/101B



White/Beechwood
CCT LED

F4011/121B



Black
CCT LED

F4011/202B



Black/Koa
CCT LED

F4011/205B



52"
1320mm

8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.

Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	12° (Approx)
Timer:	1, 4, 8 Hour

Remote:

Supplied with
remote control




Remote frequency
433 MHz



Performance

Speed	Wattage	RPM	Airflow
1	1.3	62	3,249
2	2.6	87	5,246
3	4.8	111	5,781
4	8.1	137	6,884
5	18	178	8,807
6	30	200	9,448

About the CCT LED Light

		
3000k 2102 Lumens	4000k 1959 Lumens	6000k 1956 Lumens


Light Type:

LED (20w)

Dimmable:

Yes (Stepless)


FCSP13-FM009 User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

Dimensions

No Light

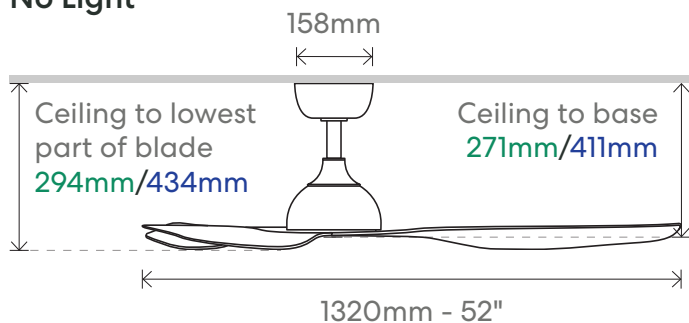


Extension Rods

White		Black	
K701M/106A	600mm	K701M/206A	600mm
K701M/109A	900mm	K701M/209A	900mm
K701M/115A	1500mm	K701M/215A	1500mm

Supplied with 2 extension rods
127mm/254mm

CCT LED Light

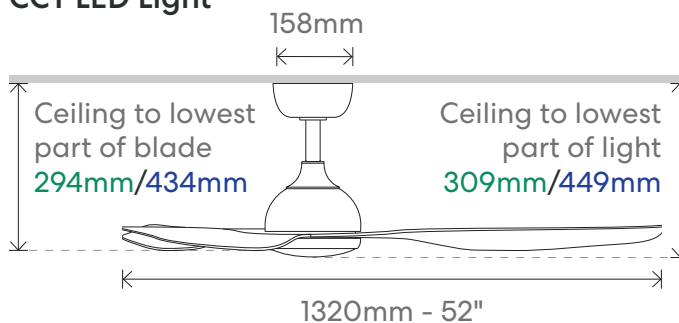

Eco Style

DC 60"

A contemporary large diameter three blade design well suited to larger living spaces.

White

No Light
F4020/101B



White/Beechwood

No Light
F4020/121B



Black

No Light
F4020/202B



Black / Koa

No Light
F4020/205B



60"
1520mm



8
Year

8 Year
Motor Warranty
2 year in home
+ 6 year motor
replacement

Technical Data

* All outdoor fans must be an enclosed outdoor area min 1.5m from edge of eave/roof, fully shielded from wind, rain & direct sunlight.


Install Location:	Indoor / Outdoor*
Motor Type:	DC
Blade Material:	ABS Plastic
Reversible:	Yes
Mount Angle:	0-15°
Blade Pitch:	12° (Approx)
Timer:	1, 4, 8 Hour
Remote:	
Supplied with remote control	Remote frequency 433 MHz



Performance

Speed	Wattage	RPM	Airflow
1	2.2	67	4,915
2	5.7	102	5,738
3	9.5	121	6,629
4	16.7	146	9,728
5	25.0	166	12,160
6	34.7	183	15,200

Dimensions

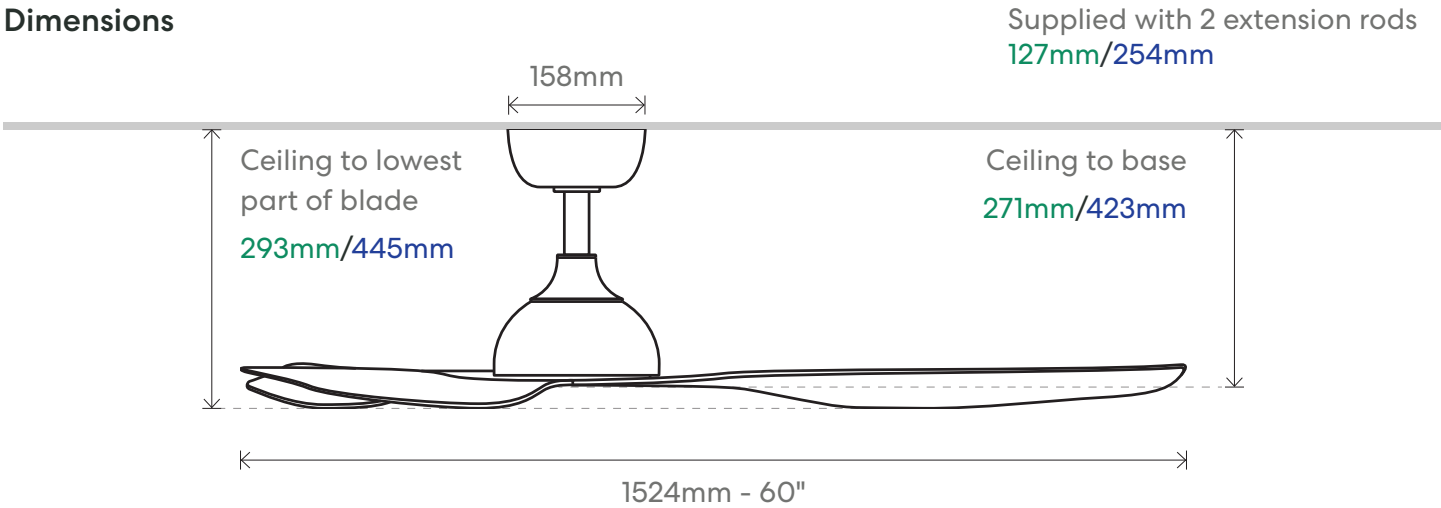

Extension Rods

White		Black	
K701M/106A	600mm	K701M/206A	600mm
K701M/109A	900mm	K701M/209A	900mm
K701M/115A	1500mm	K701M/215A	1500mm