

### QSFP28-100GB-BX-U-80-C-AO

Cisco® Compatible TAA 100GBase-ZR4 BX QSFP28 Transceiver (SMF, 1272.55nmTx/1310.19nmRx, 80km, LC, DOM)

#### Features

- QSFP28 MSA Compliant
- Built-In 4-Channel CDR
- Hot-Pluggable
- Supports 103.1Gbps to 112.2Gbps OTU4
- LAN WDM EML Laser and PIN Receiver with SOA
- Excellent EMI Performance
- Single 3.3V Power Supply
- Up to 80km Reach for G.652 SMF
- Single LC Receptacle
- Power Consumption: 5.5W
- Operating Temperature: 0 to 70 Celsius
- RoHS Compliant and Lead-Free



#### Applications

- InfiniBand QDR and DDR
- 100GBase Ethernet

#### Product Description

This Cisco® compatible QSFP28 transceiver provides 100GBase-BX ZR4 throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1272.55nmTx/1310.19nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Cisco®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



## Absolute Maximum Ratings

| Parameter                          | Symbol | Min. | Typ.     | Max.  | Unit | Notes |
|------------------------------------|--------|------|----------|-------|------|-------|
| Storage Temperature                | Tstg   | -40  |          | 85    | °C   |       |
| Operating Case Temperature         | Tc     | 0    |          | 70    | °C   |       |
| Relative Humidity (Non-Condensing) | RH     | 15   |          | 85    | %    |       |
| Supply Voltage                     | Vcc    | -0.3 |          | 4.0   | V    |       |
| Damage Threshold                   | THd    | 6.5  |          |       | dBm  |       |
| Data Rate Per Lane                 |        |      | 25.78125 | 28.05 | Gbps |       |
| Power Consumption                  | P      |      |          | 5.5   | W    |       |
| Link Distance (SMF)                | D      |      |          | 80    | km   | 1     |

## Notes:

1. Depending on actual fiber loss/km (link distance specified is for fiber insertion loss of 0.35dB/km).

## Electrical Characteristics

| Parameter                          | Symbol  | Min.    | Typ. | Max.    | Unit | Notes |
|------------------------------------|---------|---------|------|---------|------|-------|
| Power Supply Voltage               | Vcc     | 3.135   | 3.3  | 3.465   | V    |       |
| Power Supply Current               | Icc     |         |      | 1585    | mA   |       |
| Control Input Voltage - High       |         | 2       |      | Vcc     | V    |       |
| Control Input Voltage - Low        |         | 0       |      | 0.8     | V    |       |
| Transmitter Per Lane               |         |         |      |         |      |       |
| Input Differential Impedance       | RIN     |         | 100  |         | Ω    |       |
| Differential Termination Mismatch  |         |         |      | 10      | %    |       |
| Differential Data Input Amplitude  | VIN,pp  | 180     |      | 1000    | mV   |       |
| LPMODE, Reset, and ModSelL         | VIL     | -0.3    |      | 0.8     | V    |       |
|                                    | VIH     | 2       |      | Vcc+0.3 | V    |       |
| Receiver                           |         |         |      |         |      |       |
| Differential Data Output Amplitude | VOUT,pp | 350     |      | 900     | mV   |       |
| Differential Termination Mismatch  |         |         |      | 10      | %    |       |
| Transition Time (20-80%)           |         | 9.5     |      |         | ps   |       |
| ModPrsL and IntL                   | VOL     | 0       |      | 0.4     | V    |       |
|                                    | VOH     | Vcc-0.5 |      | Vcc+0.3 | V    |       |

## Optical Characteristics

| Parameter                                              | Symbol      | Min.                               | Typ.    | Max.    | Unit  | Notes |
|--------------------------------------------------------|-------------|------------------------------------|---------|---------|-------|-------|
| Transmitter                                            |             |                                    |         |         |       |       |
| Center Wavelength                                      | $\lambda_C$ | 1272.55                            | 1273.55 | 1274.54 | nm    |       |
|                                                        |             | 1276.89                            | 1277.89 | 1278.89 |       |       |
|                                                        |             | 1281.25                            | 1282.26 | 1283.27 |       |       |
|                                                        |             | 1285.65                            | 1286.66 | 1287.68 |       |       |
| Side-Mode Suppression Ratio                            | SMSR        | 30                                 |         |         |       |       |
| Total Average Power                                    | Pt          | 8.0                                |         | 10.5    | dBm   |       |
| Average Launch Power Per Lane                          | Pavg        | 2.0                                |         | 4.5     | dBm   |       |
| Extinction Ratio                                       | ER          | 6                                  |         |         | dB    |       |
| Difference in Launch Power Between Any Two Lanes (OMA) |             |                                    |         | 3.6     | dB    |       |
| Average Launch Power of Off Transmitter Per Lane       | Poff        |                                    |         | -30     | dBm   |       |
| Transmitter Reflectance                                |             |                                    |         | -12     | dB    |       |
| RIN <sub>20OMA</sub>                                   | RIN         |                                    |         | -130    | dB/Hz |       |
| Optical Return Loss Tolerance                          | TOL         |                                    |         | 20      | dB    |       |
| Transmitter Eye Mask: {X1, X2, X3, Y1, Y2, Y3}         |             | {0.25, 0.4, 0.45, 0.25, 0.28, 0.4} |         |         |       |       |
| Receiver                                               |             |                                    |         |         |       |       |
| Center Wavelength                                      | $\lambda_C$ | 1294.53                            | 1295.56 | 1296.59 | nm    |       |
|                                                        |             | 1299.02                            | 1300.05 | 1301.09 |       |       |
|                                                        |             | 1303.54                            | 1304.58 | 1305.63 |       |       |
|                                                        |             | 1308.09                            | 1309.14 | 1310.19 |       |       |
| Average Receive Power Per Lane                         | Pin         | -30                                |         | -7      | dBm   |       |
| Receive Power on OMA Per Lane                          | PinOMA      |                                    |         | -7      | dBm   |       |
| Receiver Reflectance                                   | dB          |                                    |         | -26     | dB    |       |
| Average Receiver Sensitivity                           | SEN1        |                                    |         | -22     | dBm   | 1     |
|                                                        | SEN2        |                                    |         | -21     | dBm   | 2     |
|                                                        | SEN3        |                                    |         | -28     | dBm   | 3     |
|                                                        | SEN4        |                                    |         | -27     | dBm   | 4     |
| LOS Assert                                             | LOSA        | -40                                |         |         | dBm   |       |
| LOS De-Assert                                          | LOSD        |                                    |         | -29     | dBm   |       |
| LOS Hysteresis                                         | LOSH        | 0.5                                |         |         | dB    |       |

### Notes:

1. Measured @25.78125Gbps, ER=8.2dB, BER=<1E<sup>-12</sup>, PRBS=2<sup>31</sup>-1 NRZ.
2. Measured @28.05Gbps, ER=8.2dB, BER=<1E<sup>-12</sup>, PRBS=2<sup>31</sup>-1 NRZ.
3. Measured @25.78125Gbps, ER=8.2dB, BER=<5E<sup>-5</sup>, PRBS=2<sup>31</sup>-1 NRZ.
4. Measured @28.05Gbps, ER=8.2dB, BER=<5E<sup>-5</sup>, PRBS=2<sup>31</sup>-1 NRZ.

## Pin Descriptions


| Pin | Symbol  | Name/Description                                   | Notes |
|-----|---------|----------------------------------------------------|-------|
| 1   | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 2   | Tx2-    | Transmitter Inverted Data Input.                   |       |
| 3   | Tx2+    | Transmitter Non-Inverted Data Output.              |       |
| 4   | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 5   | Tx4-    | Transmitter Inverted Data Input.                   |       |
| 6   | Tx4+    | Transmitter Non-Inverted Data Output.              |       |
| 7   | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 8   | ModSelL | Module Select.                                     |       |
| 9   | ResetL  | Module Reset.                                      |       |
| 10  | VccRx   | +3.3V Receiver Power Supply.                       | 2     |
| 11  | SCL     | 2-Wire Serial Interface Clock.                     |       |
| 12  | SDA     | 2-Wire Serial Interface Data.                      |       |
| 13  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 14  | Rx3+    | Receiver Non-Inverted Data Output.                 |       |
| 15  | Rx3-    | Receiver Inverted Data Output.                     |       |
| 16  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 17  | Rx1+    | Receiver Non-Inverted Data Output.                 |       |
| 18  | Rx1-    | Receiver Inverted Data Output.                     |       |
| 19  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 20  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 21  | Rx2-    | Receiver Inverted Data Output.                     |       |
| 22  | Rx2+    | Receiver Non-Inverted Data Output.                 |       |
| 23  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 24  | Rx4-    | Receiver Inverted Data Output.                     |       |
| 25  | Rx4+    | Receiver Non-Inverted Data Output.                 |       |
| 26  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 27  | ModPrsL | Module Present.                                    |       |
| 28  | IntL    | Interrupt.                                         |       |
| 29  | VccTx   | +3.3V Transmitter Power Supply.                    | 2     |
| 30  | Vcc1    | +3.3V Power Supply.                                | 2     |
| 31  | LPMODE  | Low-Power Mode.                                    |       |
| 32  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |
| 33  | Tx3+    | Transmitter Non-Inverted Data Input.               |       |
| 34  | Tx3-    | Transmitter Inverted Data Output.                  |       |
| 35  | GND     | Transmitter Ground. (Common with Receiver Ground). | 1     |

|           |      |                                                    |   |
|-----------|------|----------------------------------------------------|---|
| <b>36</b> | Tx1+ | Transmitter Non-Inverted Data Input.               |   |
| <b>37</b> | Tx1- | Transmitter Inverted Data Output.                  |   |
| <b>38</b> | GND  | Transmitter Ground. (Common with Receiver Ground). | 1 |



#### Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1, and VccTx are the receiving and transmission power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown below. VccRx, Vcc1, and VccTx may be internally connected within the module in any combination. The connector pins are each rated for a maximum current of 1000mA.

#### Electrical Pin-Out Details

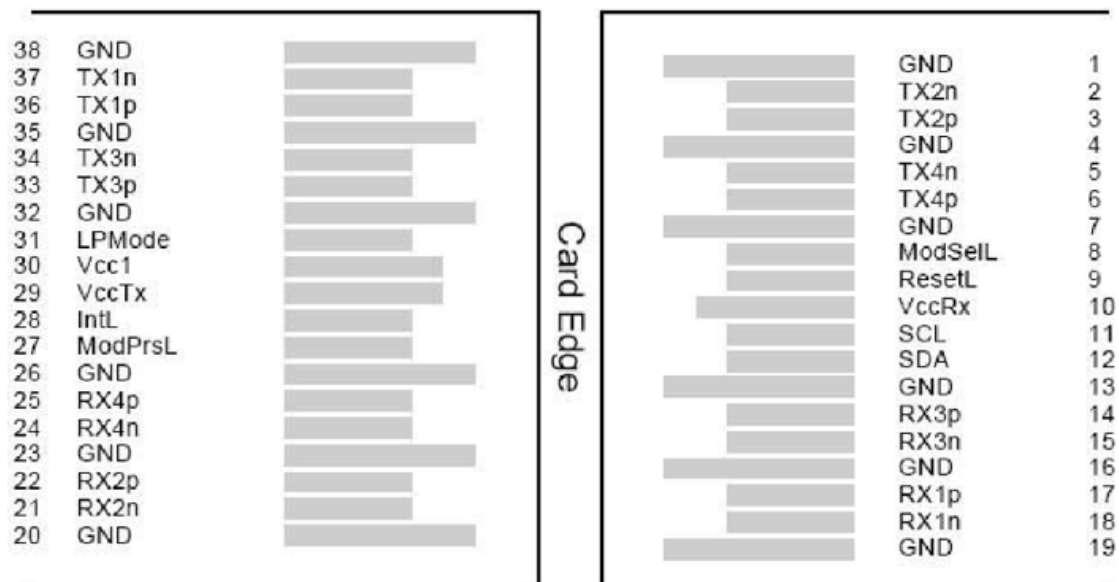

Mechanical Specifications

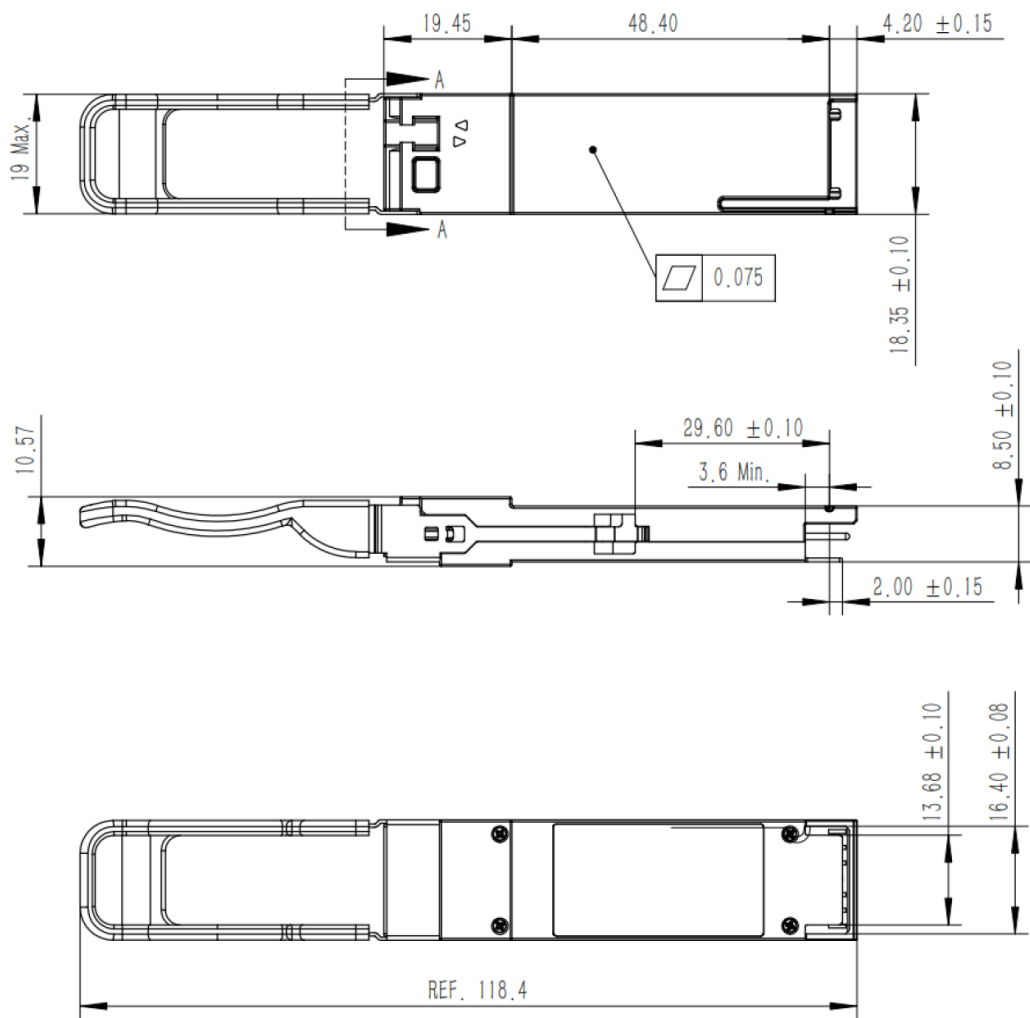

Units in mm

## About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



## U.S. Headquarters

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## Europe Headquarters

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070