
Bianca
Wall Basin/Bath Mixer
Separate Back Plate

Nero


187mm Trim Kits Only

Lead Free

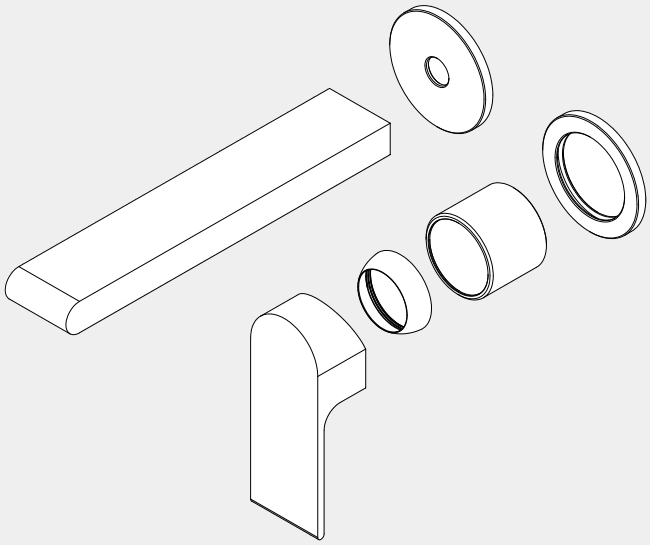

Versions:202405

Drawing

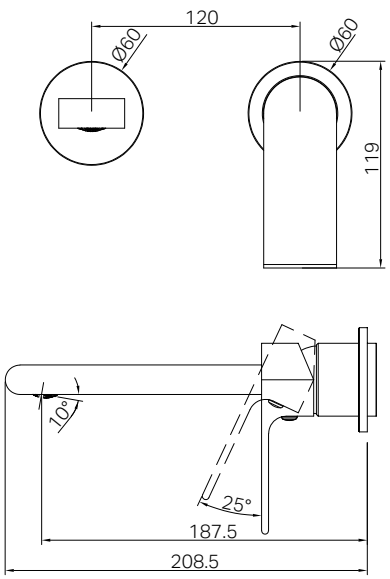

Specifications

Watermark License
WM-060073

Temperature Rating
Min 1˚C-Max 75˚C

Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes

2x Plates
1x Handle
1x Spout
1x Cartridge Bell
1x Dressing Ring
1x Installation Kits

Finish & SKU


Chrome NR321510etCH	Gun Metal NR321510etGM	Brushed Nickel NR321510etBN
Matte Black NR321510etMB	Brushed Gold NR321510etBG	Brushed Bronze NR321510etBZ

*Dimensions are nominal measurements only.


Installation Instruction


GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

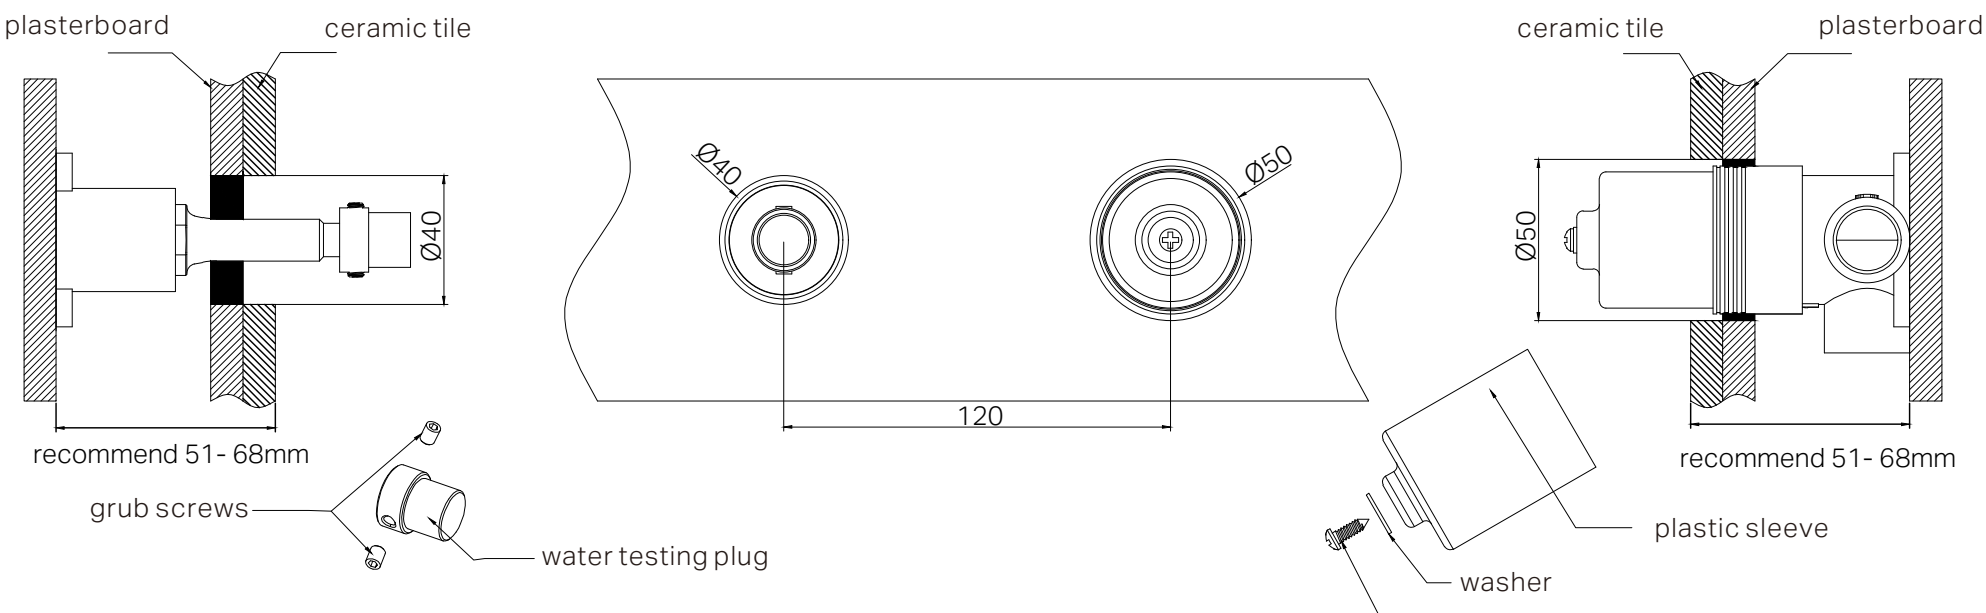

1. Drill a Ø50mm and a ø40mm hole in the ceramic tile, then position il as shown in the above diagram.
2. Undo the self-taping screw to remove the plastic sleeve, and release the grub screws to remove the water testing plug.

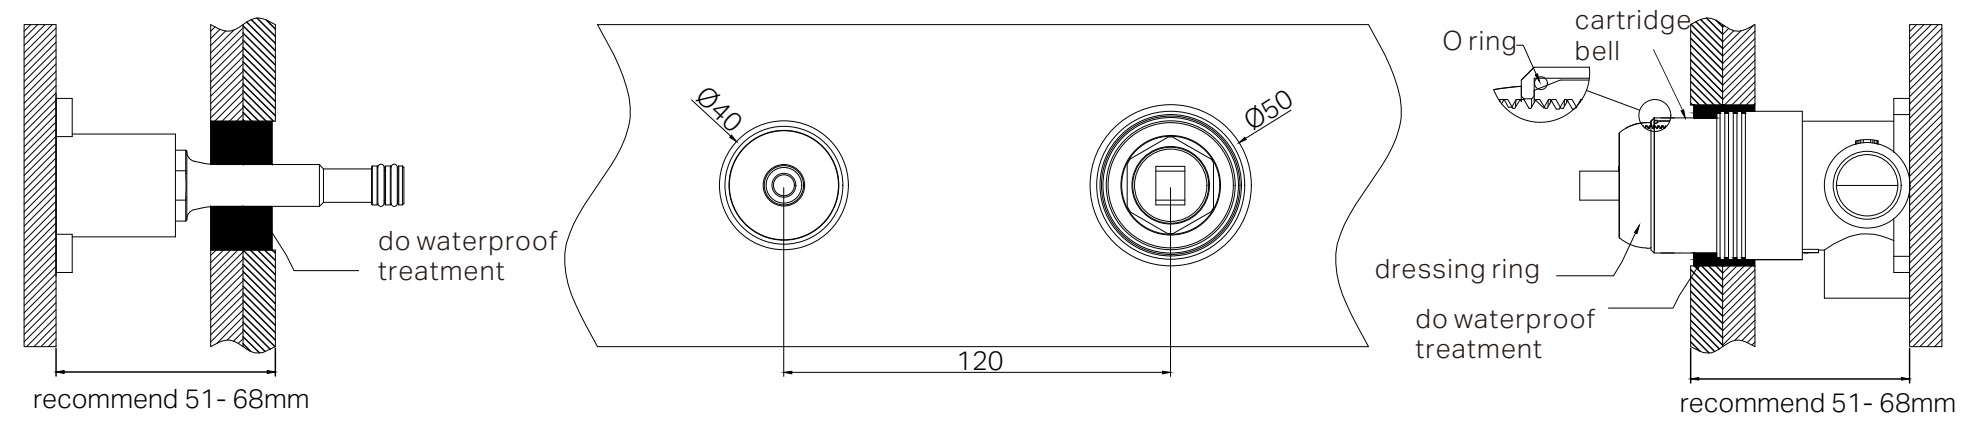

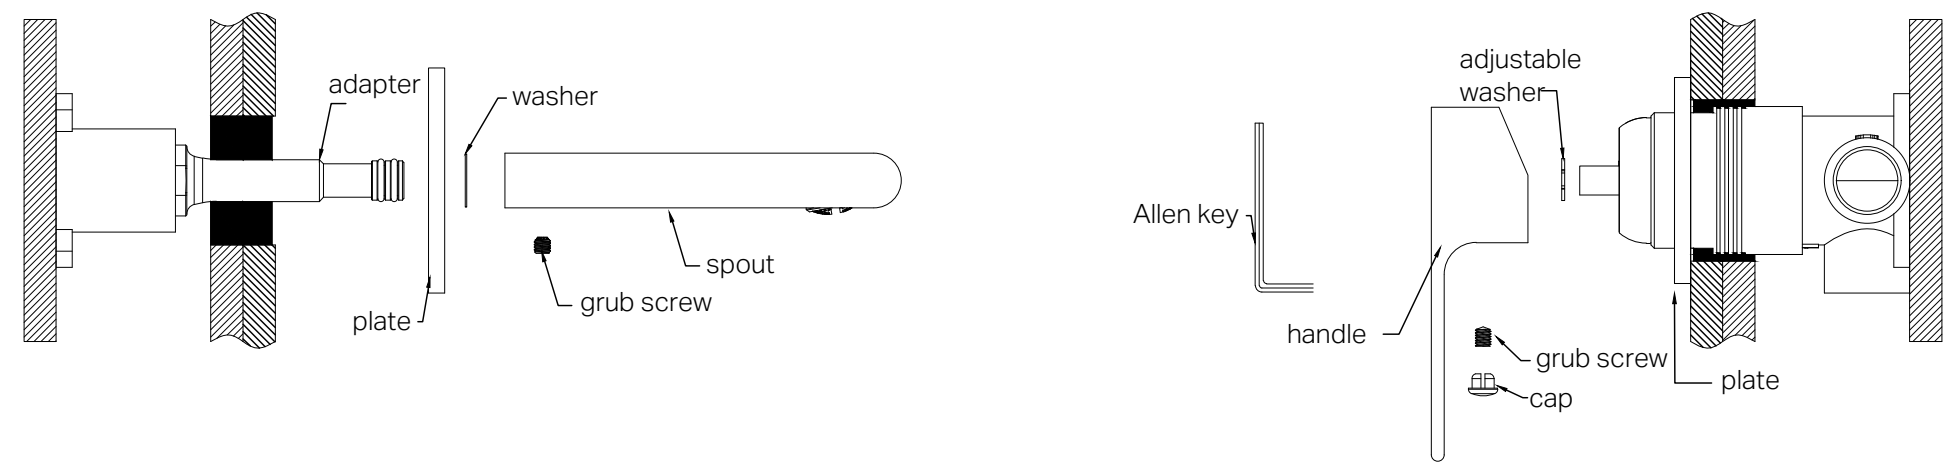

3. Insert the O ring to the cartridge bell groove, and slide the cartridge bell onto cartridge.
4. Apply waterproof treatment to the area indicated in the diagram above.
5. Tighten up the dressing ring on the cartridge bell.
6. Slide the backplates and washer onto the wall, set the spout in place, and secure it tightly using the grub screw.
7. Attach the washer to the cartridge rod, position the handle, tighten it with a grub screw using an Allen key, and cap the grub screw hole.

Please note: there is a washer between backplate and the spout.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero


WATER RATING
www.waterrating.gov.au
4.5 litres per minute
Licence No. 1225



Pb
Lead Free


25 YEARS WARRANTY
25
25 YEARS WARRANTY

Bianca
Wall Basin/Bath Mixer
Separate Back Plate


230mm Trim Kits Only

Lead Free

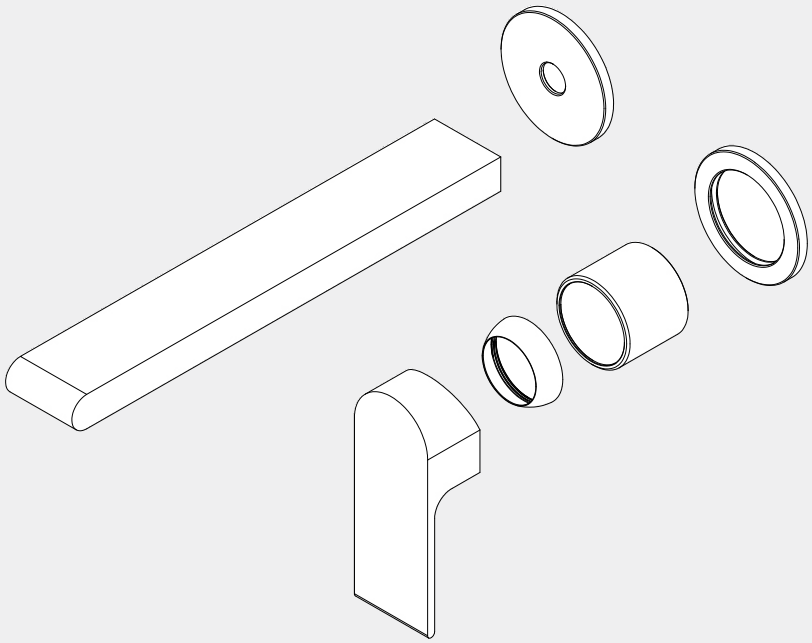

Versions:202405

Drawing

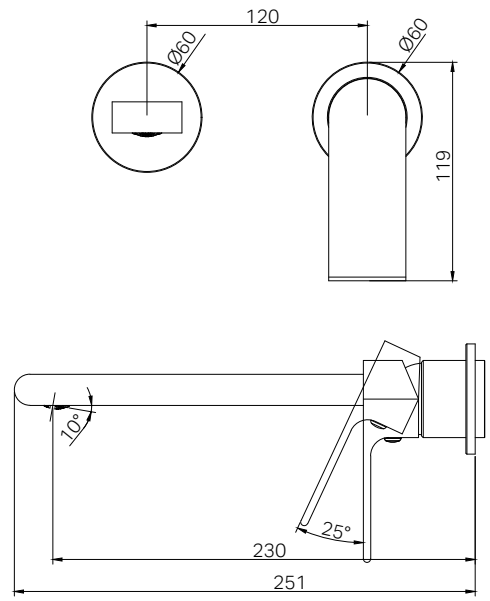

Specifications

Watermark License
WM-060073

Temperature Rating
Min 1˚C-Max 75˚C

Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes

2x Plates
1x Handle
1x Spout
1x Cartridge Bell
1x Dressing Ring
1x Installation Kits

Finish & SKU


Chrome NR321510ftCH	Gun Metal NR321510ftGM	Brushed Nickel NR321510ftBN
Matte Black NR321510ftMB	Brushed Gold NR321510ftBG	Brushed Bronze NR321510ftBZ

*Dimensions are nominal measurements only.


Installation Instruction

GENERAL INSTRUCTIONS:


- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

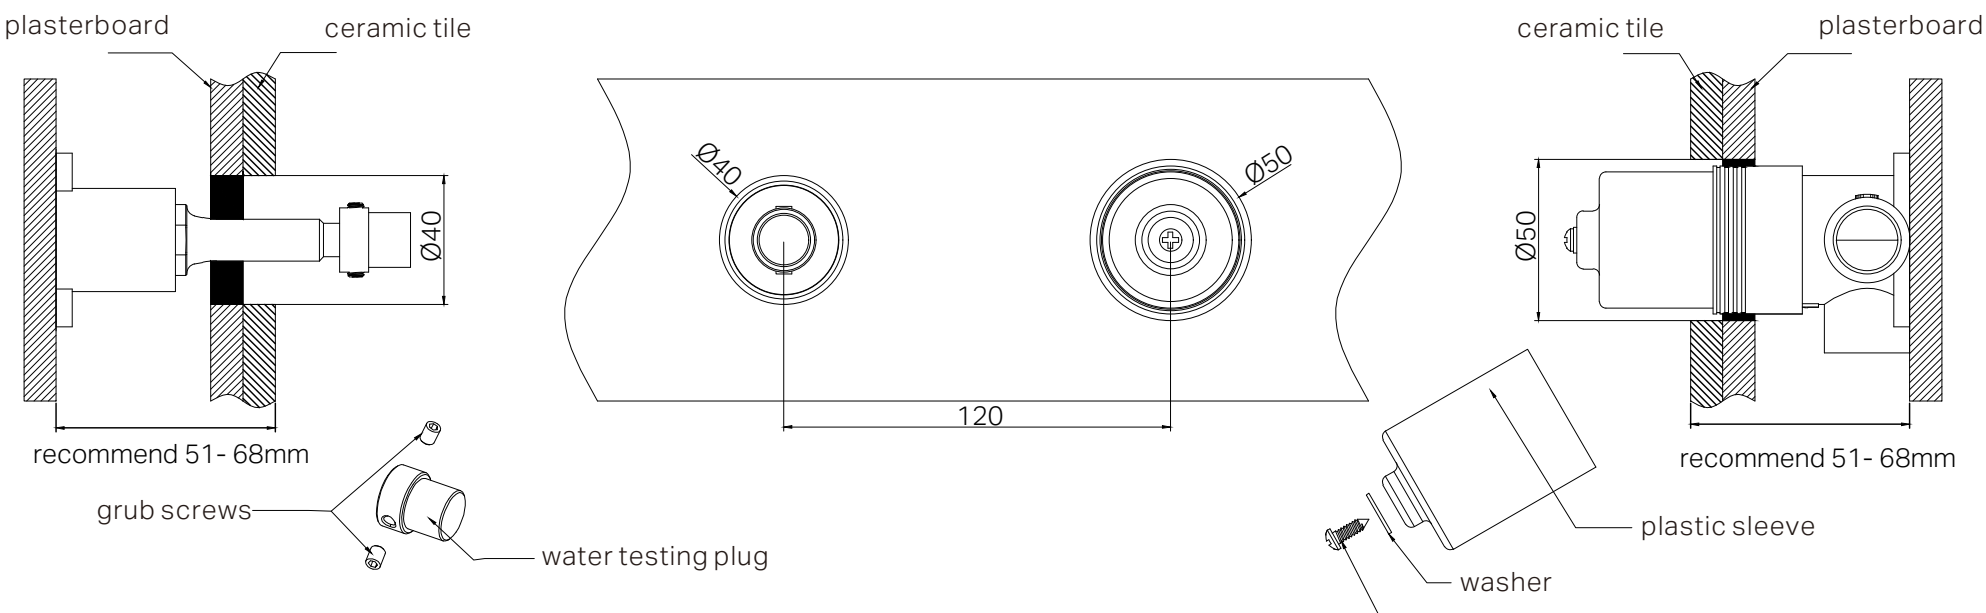

1. Drill a Ø50mm and a ø40mm hole in the ceramic tile, then position il as shown in the above diagram.
2. Undo the self-taping screw to remove the plastic sleeve, and release the grub screws to remove the water testing plug.

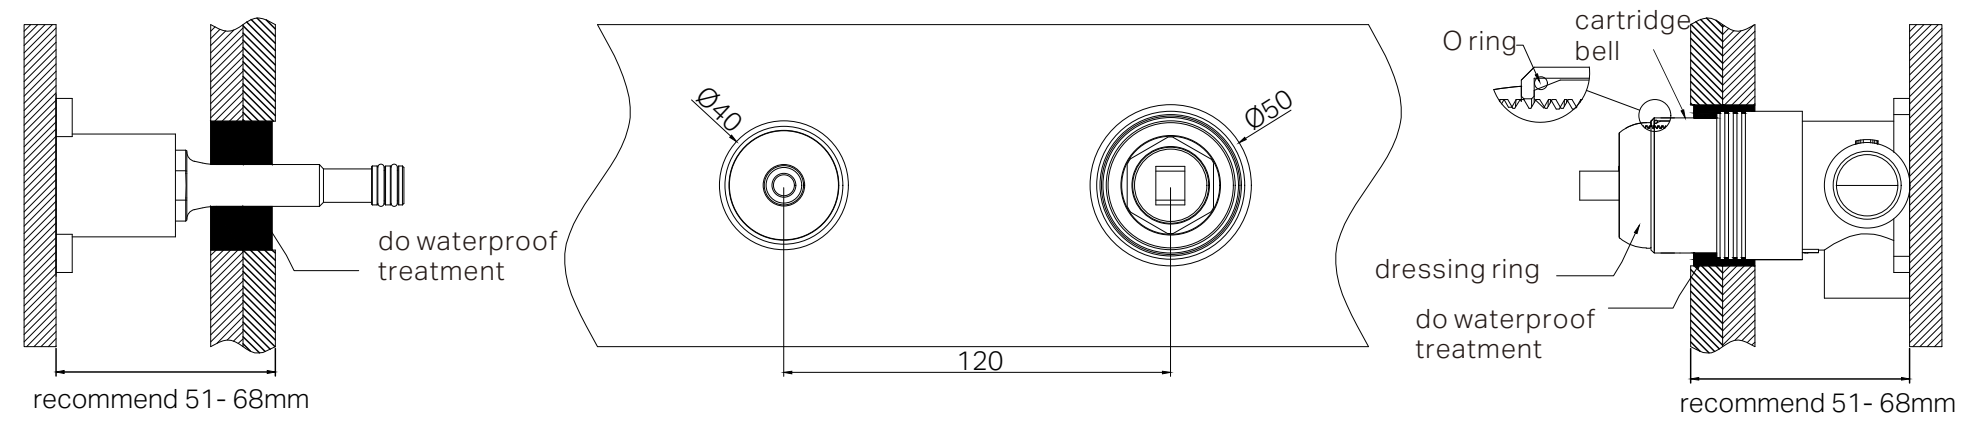

3. Insert the o ring to the cartridge bell groove, and slide the cartridge bell onto cartridge.
4. Apply waterproof treatment to the area indicated in the diagram above.
5. Tighten up the dressing ring on the cartridge bell.

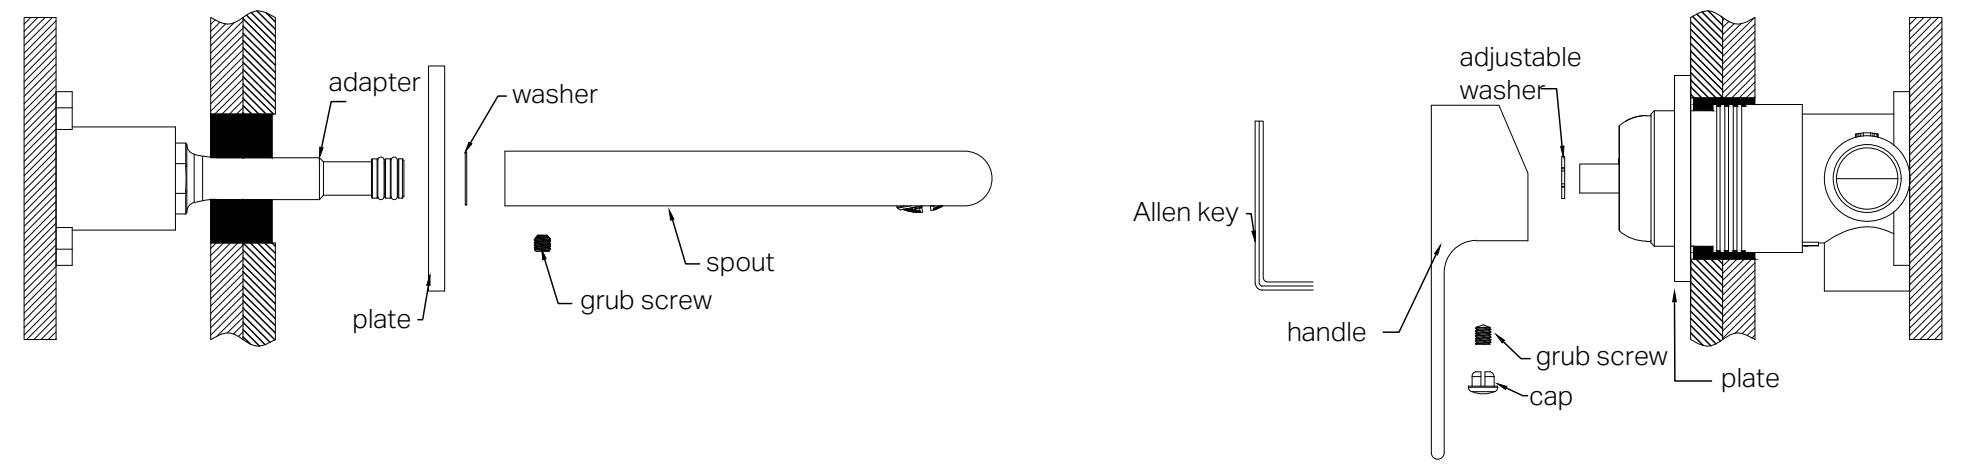

6. Slide the backplate and washer onto the wall, set the spout in place, and secure it tightly using the grub screw.
7. Attach the washer to the cartridge rod, position the handle, tighten it with a grub screw using an Allen key, and cap the grub screw hole.

Please note: there is a washer between backplate and the spout.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero


The more stars the more water efficient
WATER RATING
www.waterrating.gov.au
4.5 litres per minute
In accordance with AS/NZS 6400
Licence No. 1225
YUSHENDWANG SANITARY WARE LIMITED COMPANY


Pb
Lead Free


25 YEARS WARRANTY
25
25 YEARS WARRANTY