




Kara Wall Top Assemblies

Nero

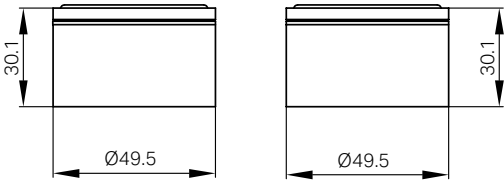

Versions:202401

Drawing	Specifications	Packaging Includes
 Note: In Wall Body/ Breech Not Included.	Watermark License WM-060073	2x Handwheels 1x Allen Key
	Temperature Rating Min 1°C-Max 75°C	
	Pressure Rating Min 150kpa - Max 500kpa	
Finish & SKU		
 Chrome NR211709CH	 Gun Metal NR211709GM	 Brushed Bronze NR211709BZ
 Matte Black NR211709MB	 Brushed Gold NR211709BG	 Brushed Nickel NR211709BN

*Dimensions are nominal measurements only.

1

cap*2

grub screw*2

handle wheel*2

screw*2

adapter*2

lock flange*2

lock nut*2

washer*2

quick-opening valve*2

ø49.5

ø49.5

50

75

ø35

G5/8

15-25

38-48

23

ceramic tile

wall

standard tap seat body

Install standard tap seat body as the dimension.

2

ceramic tile

wall

standard tap seat body

lock nut

washer

quick-opening valve

1.Screw the quick-opening valve onto the body tightly.

2.Put on the washer and screw the lock nut on the quick-opening valve.

3

ceramic tile

wall

lock flange

Screw lock flange tightly on the lock nut.

4

ceramic tile

wall

gauge

Screw gauge tightly on the lock nut.

5

ceramic tile

wall

cut off remaining thread

1.Cut off remaining thread against to the cut off gauge.

2. Use a file to make the cutting surface flat and smooth.

6

ceramic tile

wall

screw

adapter

1.Take off the cut off gauge.

2.Put on the adapter.

3.Fasten the screw firmly.

7

cap

ceramic tile

wall

grub screw

handle wheel

1.Put on handle wheel.

2.Fasten grub screw firmly.

3.Put cap back on handle wheel.

Nero — 3

www.nerotapware.com.au
Kara Wall Top Assemblies –Manual

Nero

