
# Mecca
# Hob Bath/Kitchen Mixer Set
## Arc Spout


Nero

Lead Free

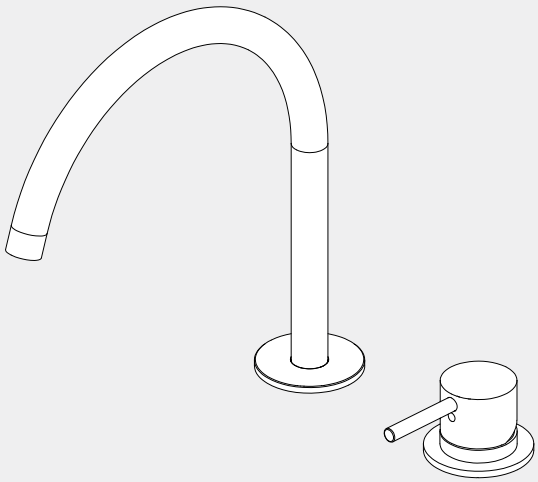

Versions:202511

### Drawing

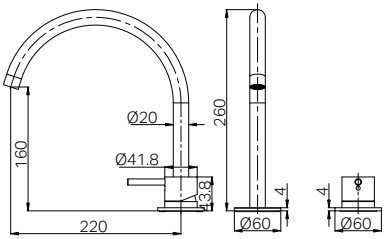


### Specifications

**Watermark License**
WM-060073
**Temperature Rating**
Min 1 ℃ - Max 75 ℃
**Pressure Rating**
Min 150 kpa - Max 500 kpa

### Packaging Includes

1x Spout Set
1x Handle Set
(including 3 flexible hoses)
1x Installation Kits

### Finish & SKU

- **Brushed Bronze** NR221901jBZ
- **Matte Black** NR221901jMB
- **Chrome** NR221901jCH
- **Brushed Gold** NR221901jBG
- **Brushed Nickel** NR221901jBN
- **Gun Metal** NR221901jGM
- **Matte White** NR221901jMW

*Dimensions are nominal measurements only.

# INSTALLATION INSTRUCTIONS


## GENERAL INSTRUCTIONS:


-This product must be installed by a licensed plumber. Ensure that the installation complies with the Australian / New Zeal and Standard AS/NZS 3500.

- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.
- After installation, all connections must be checked for leaks.
- This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
- If limited water flow is experienced, locate aerator and filter washers and clean away foreign material as required.


## MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

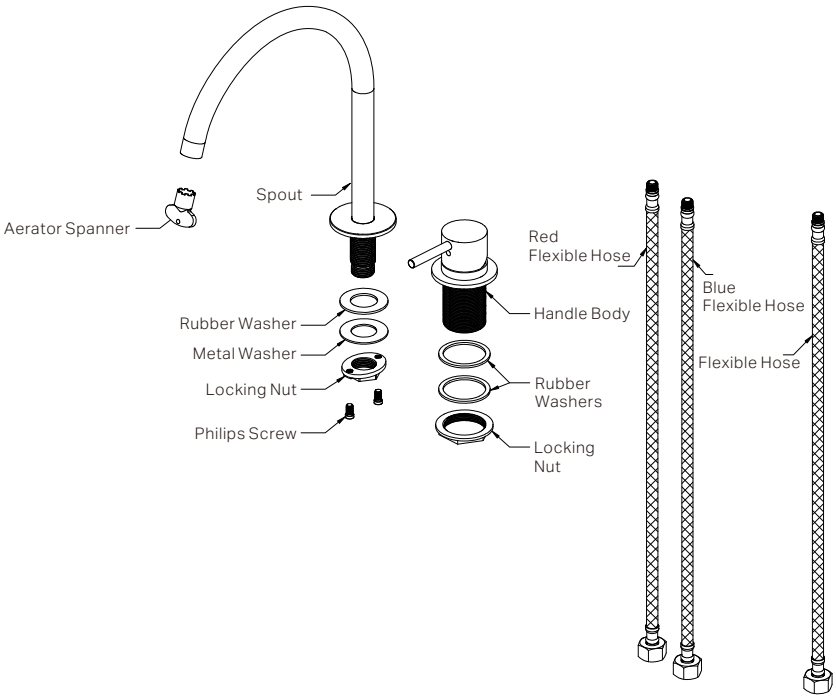


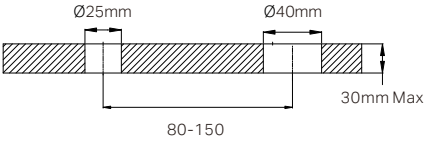



1. Cut holes on the benchtop according to the dimensions shown in the diagram. The distance between the two holes should be 80–150 mm, and the benchtop thickness must not exceed 30 mm.





2. Remove the locking nut, metal washer, and rubber washer from the spout.

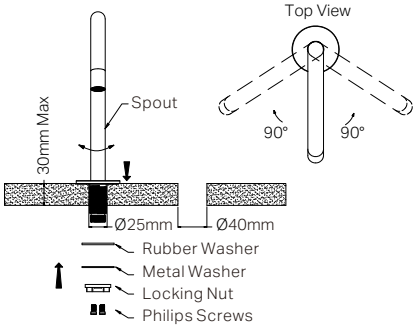



3. Rotate the spout to the midpoint of its 180° swivel range.
Insert the spout into the Ø25 mm mounting hole and align it towards the basin.
Secure the spout from underneath as shown in the diagram above.




4. Insert the handle body through the Ø40 mm hole(ensure the rubber washer is positioned between the handle and benchtop).
Fit the rubber washer and locking nut underneath the benchtop, then tighten securely to hold the handle in place.

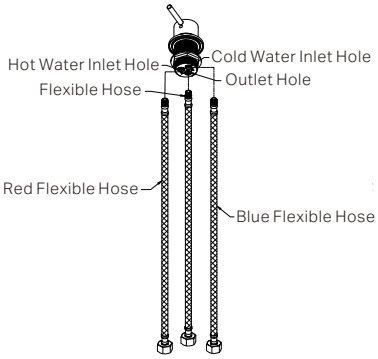


5. Install the three different flexible hoses into the corresponding holes on the handle body as shown in the diagram. Red-H, Blue-C.



6. Connect the flexible hoses to the spout assembly. The red and blue flexible hoses should be connected to the angle valves.

3171031

Nero

Warranty Policy