


Mecca Shower Rail With Air Shower


Nero



Versions:202506

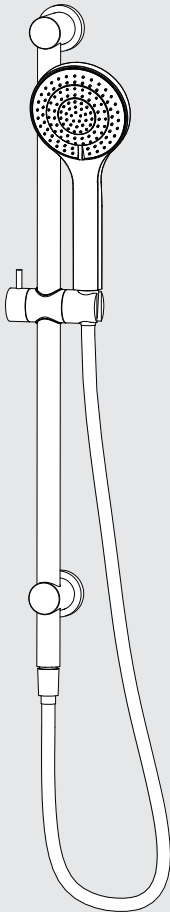

Drawing

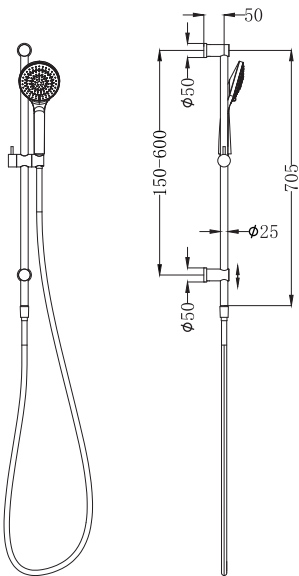

Specifications

Watermark License
WM-060093
Temperature Rating
Min 1°C-Max 75°C
Pressure Rating
Min 150kpa - Max 500kpa

Packaging Includes

- 1x Hand Shower (Built- In Check Valve)
- 1x Shower Rail
- 1x Adapter
- 1x Shower Bracket
- 1x 1.5m PVC Hose
- 2x Back Plates


Finish & SKU

- | | | |
|---|--|--|
|  Chrome
NR221905aCH |  Matte White
NR221905aMW |  Brushed Nickel
NR221905aBN |
|  Matte Black
NR221905aMB |  Brushed Gold
NR221905aBG | |


*Dimensions are nominal measurements only.

Important


All products must be installed by licensed plumbers.
All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

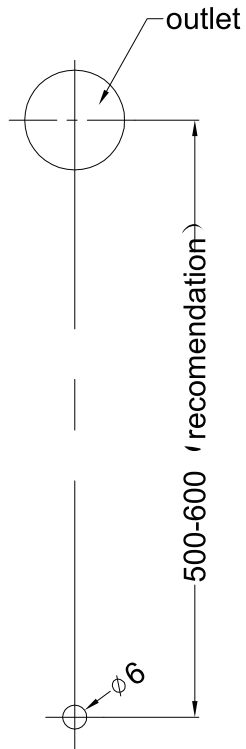


1. Drill a p6mm hole at the downwardsoutlet
vertical downward positionin the
recomendation range.

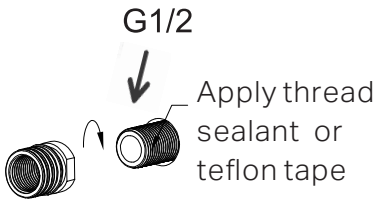


2. Screw the adapter onto the outlet.
Push wall plug into drilled hole. Fit
lower mounting pillar in place with
screw. Tighten firmly.

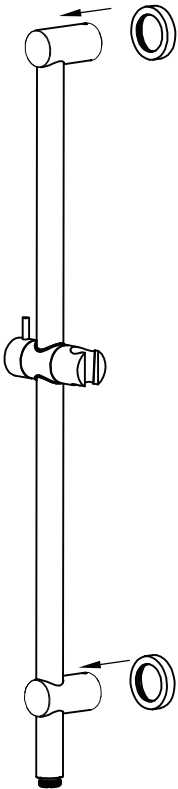

3. Slide both top and bottom back plate onto
the rail assembly, as shown on the picture.

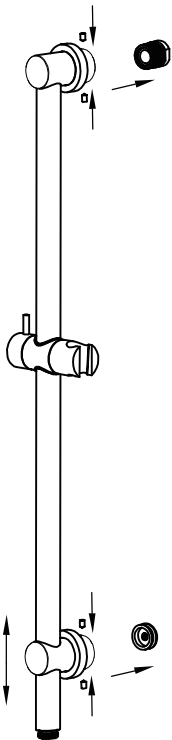

4. Push shower rail assembly onto
the wall/tile face.
Tighten grub screws firmly.
Slide the back plates against the
wall/tile face properly.

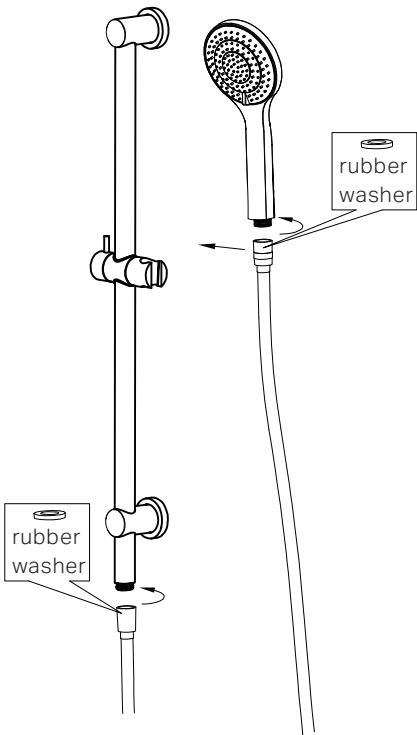

5. Connect shower rail and hand shower with hose.
TEST & CHECK FOR LEAKS

Nero

