ZANDA
ARCHITECTURAL HARDWARE

Data Sheet

Product Code: 5972




CONCEALED HINGE

W/ 3D ADJUSTMENT

FEATURES:


- Can be used on interior or exterior doors.
- These hinges allow three-dimensional adjustment (depth, vertical and horizontal). This means the door can be aligned with the wall to perfection where there is frameless architectural.
- Recommended maximum opening angle of 120 degrees.
- Hinge reversible for right/left doors.
- Comes with Self-lubricating anti-friction washers.

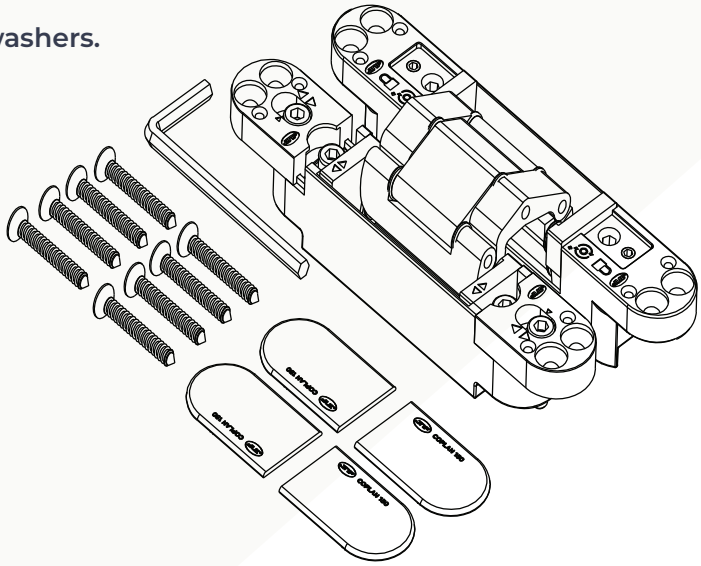

COMPONENTS:

- 1x 5972 3D Hinge
- 8x Fixing Screws
- 4x Covers
- 1x Allen Key

WARNINGS

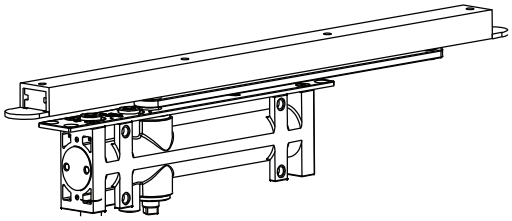



- Not recommended to use door closers with restraint system.
- The adjustments in 3 axes must be carried out on one axis at a time.
- Make small adjustments to the adjusting screws alternating hinge on hinge


1 300 926 321
sales@zanda.com.au
www.zanda.com.au


CONCEALED HINGE
W/ 3D ADJUSTMENT

MEASUREMENTS

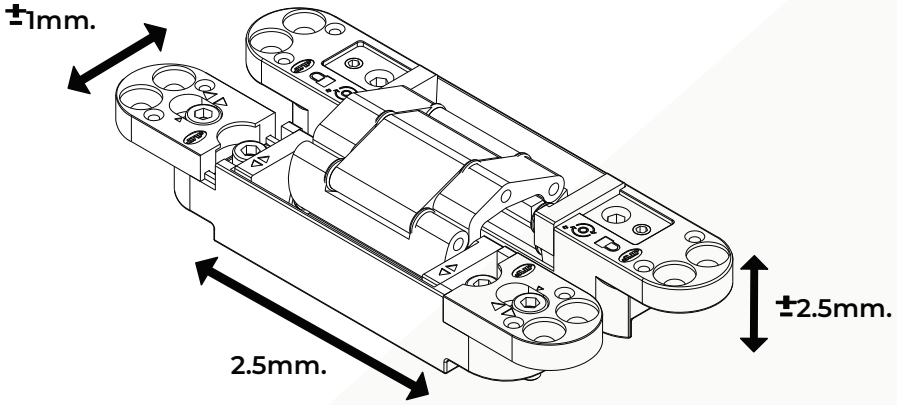



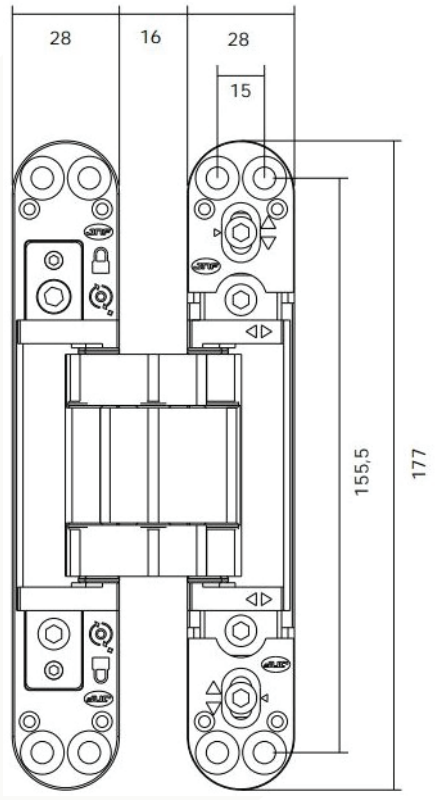


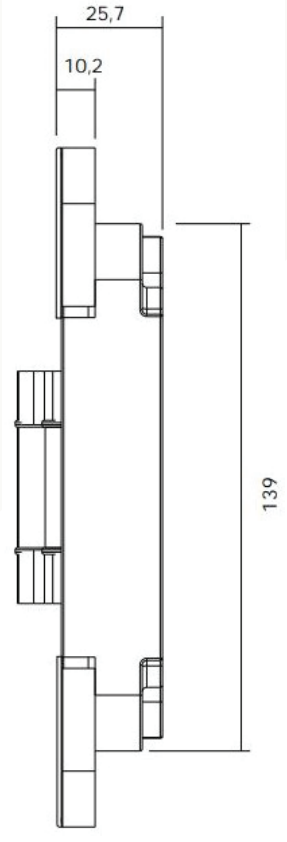


1 300 926 321
sales@zanda.com.au
www.zanda.com.au


CONCEALED HINGE
W/ 3D ADJUSTMENT

DOOR SPECIFICATIONS

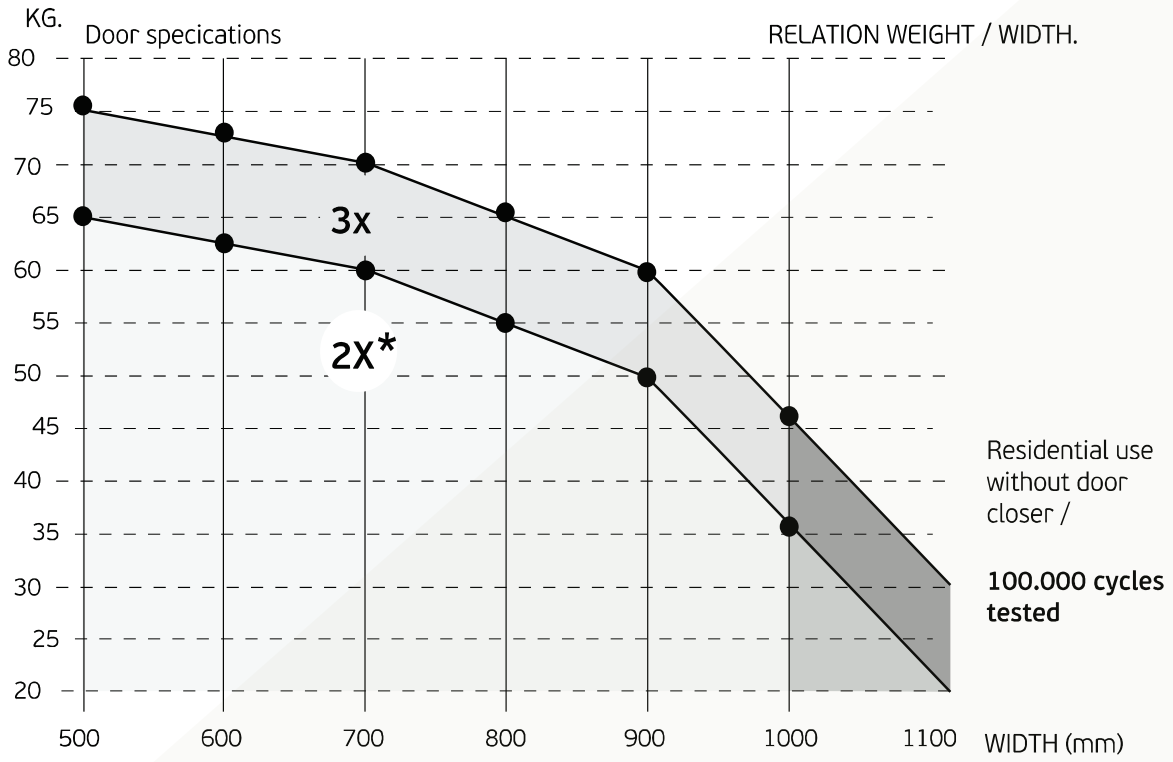


Distribution

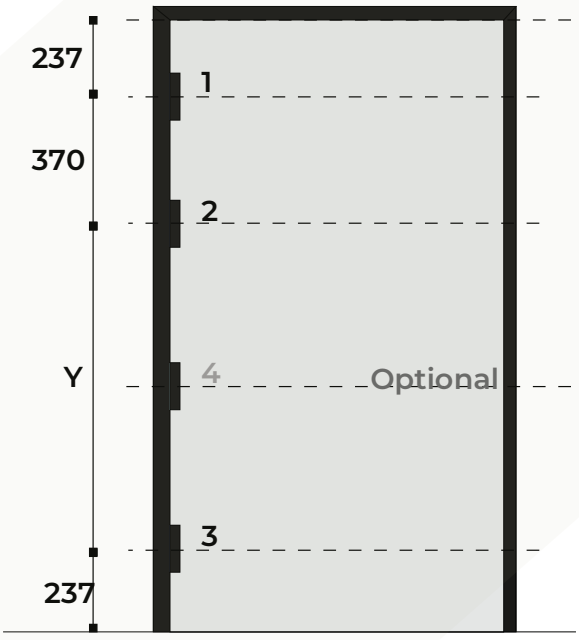

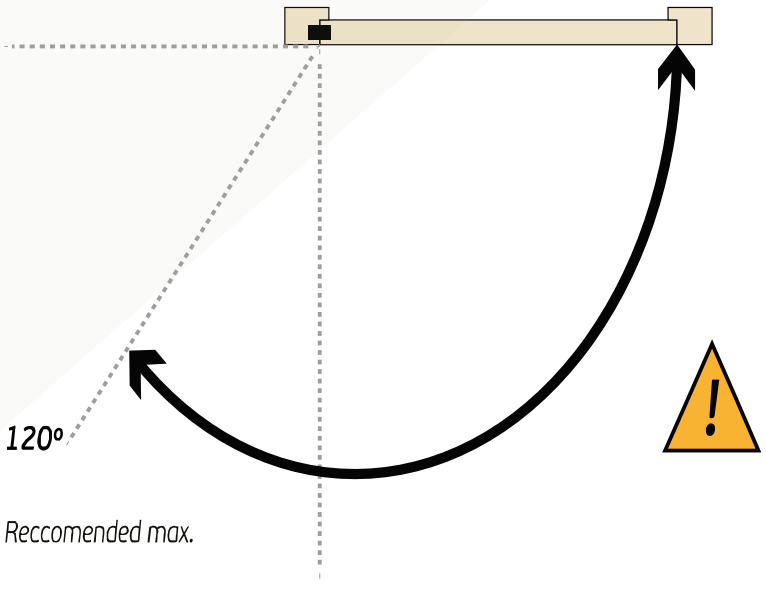


CONCEALED HINGE
W/ 3D ADJUSTMENT


ADJUSTMENT

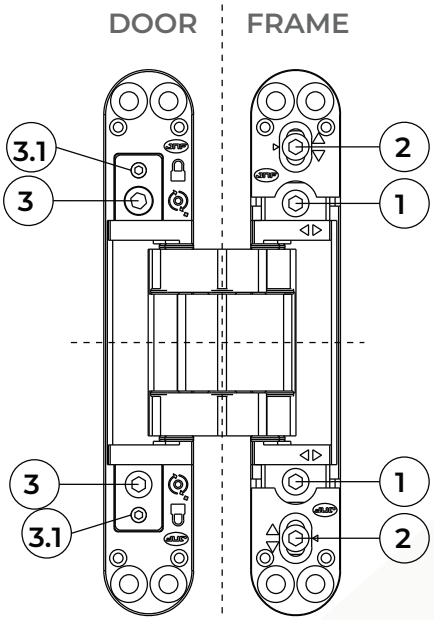


1. Depth adjustment. Loose the 2 screws of each hinge.
   - Adjust the position of the door.
   - Tighten all screws, torque 3 N/m. /
2. Vertical adjustment. Loose the 2 screws of each hinge.
   - Place a shim in the lower part of the door with the desired
   - gap. Tighten all screws, torque 3 N/m. /
3. Horizontal adjustment. Loose the screws (3.1) of each
   - hinge. Turning alternately the screws (3) in order to
3.1 - achieve the desired gap. To lock adjustment tighten all the
   - Screws (3.1) Torque 3 N/m. /

CUT OUT

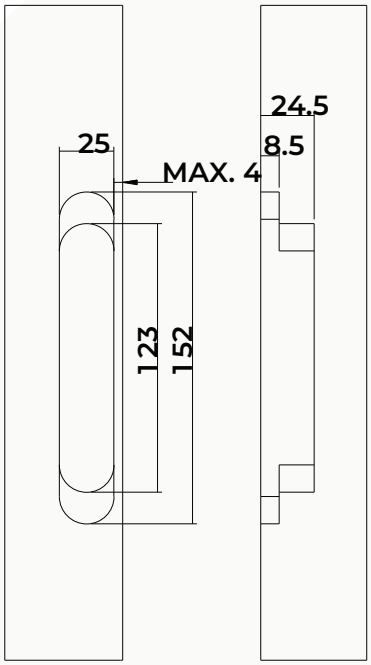

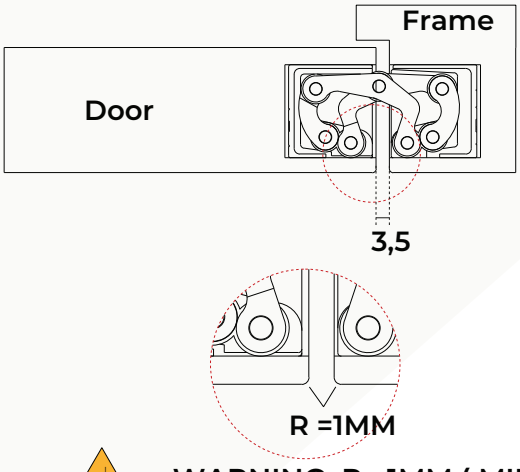

WARNING R =1MM (MIN.)

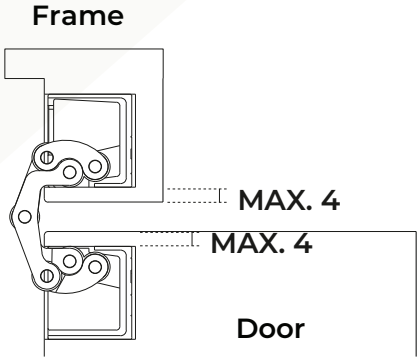

1 300 926 321
sales@zanda.com.au
www.zanda.com.au