




Customer Service : (702) 361-4345, (800) 525-2655, [customer.service@kalco.com](mailto:customer.service@kalco.com)

**WARNING - TO REDUCE THE RISK OF FIRE OR INJURY:**

- 1.If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit .More than one person may be necessary to install fixture ,make sure you have enough qualified help.
- 2.Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
- 3.DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

## Fixture Assembly

- Step 1. Fasten 2 8-32 screws to mounting plate so that they extend away from the wall when mounting plate is installed
- Step 2. Attach mounting plate to electrical box using 2 8-32 machine screws
- Step 3. Fix metal shade to plate by using screws, then raise this part to ceiling by nipple
- Step 4. Install E12 bulbs, do not use bulbs that exceeds 60W
- Step 5. Fix glass shade to main body by using metal lathe

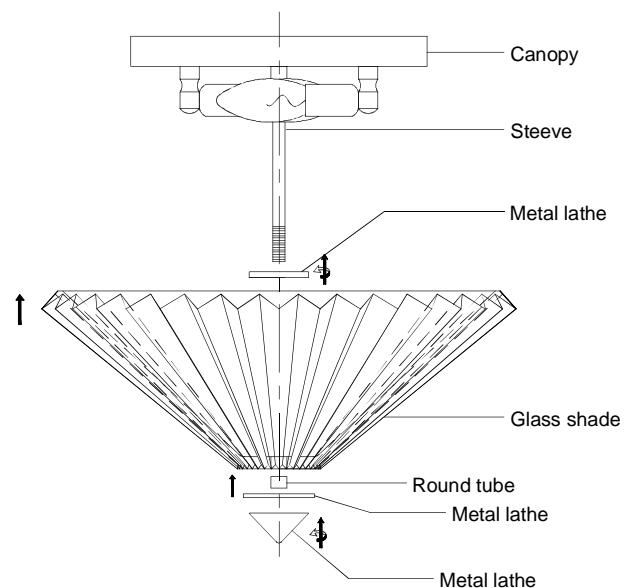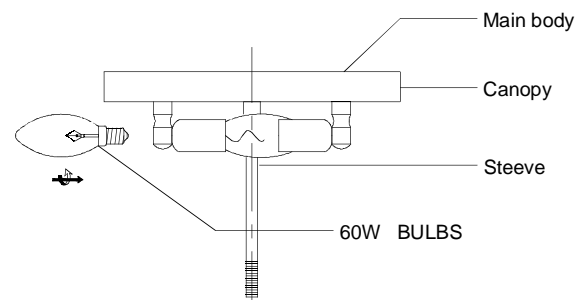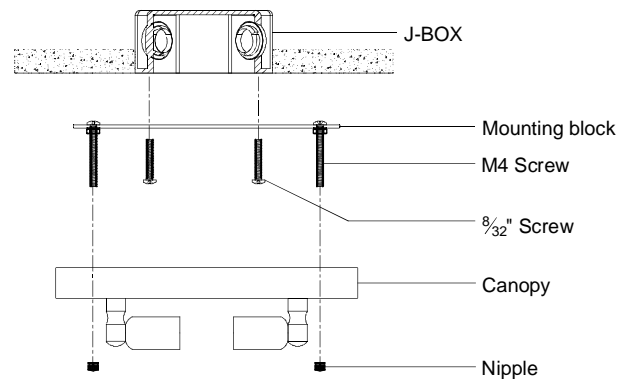

Customer Service :(702)361-4345,(800)525-2655,customer.service@kalco.com

### Fixture Assembly

**Step 6. Fasten 2 screws**  
into mounting plate so that they extend  
away from wall when mounting plate is  
installed

**Step 7. Attach the mounting plate to outlet box**  
with screws

**Step 8. Refer to wiring diagram.**  
Splice the ribbed side of fixture cord  
to the white supply wire from outlet box  
with wire connector. Splice the smooth  
side of the fixture cord to black supply  
wire from outlet box with wire connector

**Step 9. Carefully tuck in all wires** Attach the  
back plate with the mounting screw on  
the crossbar. Secure fixture with shell  
knobs.

