



Customer Service : (702)361-4345, (800)525-2655, customer.service@kalco.com

**WARNING - TO REDUCE THE RISK OF FIRE OR INJURY:**

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.


**Fixture Assembly**

Step 1. Fix part #4 to part #5 by using flat screw .

Step 2. Fix part #2 to part #5 by using screw .

Step 3. Install E12 bulbs, do not use bulbs that exceeds 40W.

Step 4. Finally, check the installation, the crystal hanging on the lamp body.

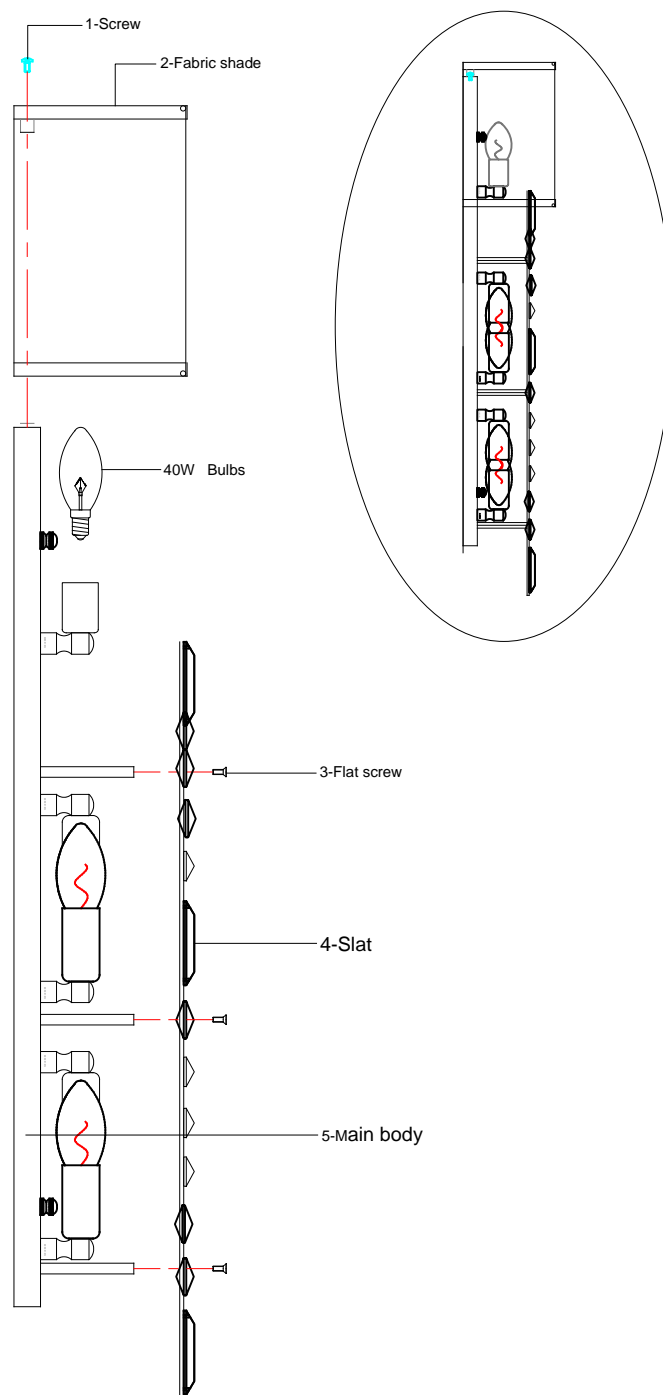

Customer Service : (702)361-4345, (800)525-2655, customer.service@kalco.com

## Fixture Assembly

Step 5. Fasten 2 screws  
into mounting plate so that they extend  
away from wall when mounting plate is  
installed

Step 6. Attach the mounting plate to the  
outlet box with screws

Step 7. Refer to wiring diagram.  
Splice the ribbed side of fixture cord  
to the white supply wire from outlet box  
with wire connector. Splice the smooth  
side of the fixture cord to black supply  
wire from outlet box with wire connector

Step 9. Carefully tuck in all wires. Attach the  
backplate with the mounting screw on  
the crossbar. Secure fixture with shell  
knobs.

