




ALLEGRI.

BY KALCO LIGHTING™

Customer Service: (702) 361-4345, (800) 525-2655, customer.services@kalco.com

WARNING - TO REDUCE THE RISK OF FIRE OR INJURY:




- 1.If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install this fixture, make sure you have enough qualified help.
- 2.Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
- 3.DO NOT install bulb exceeding the maximum wattage specified on the socket label.

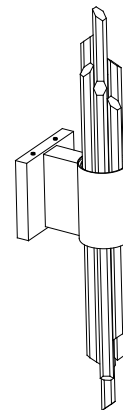

Fixture Assembly:

Step 1. Install the LED.STRIPS,

Wire connecting view

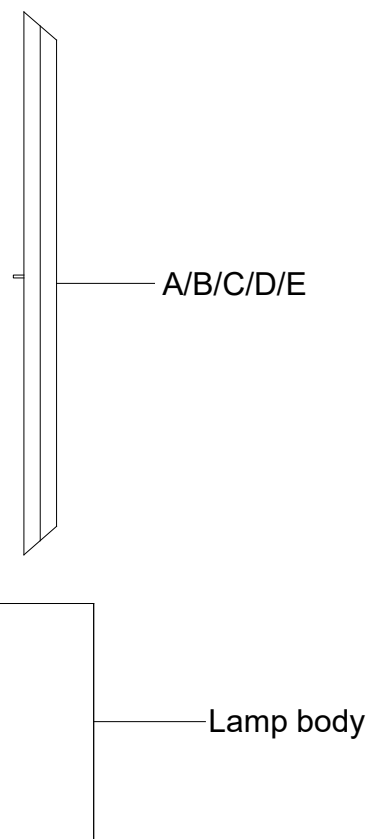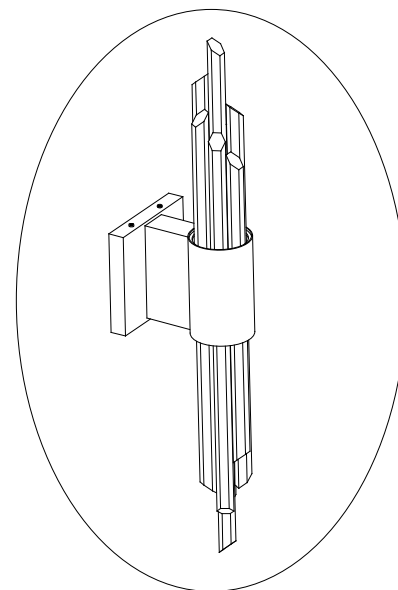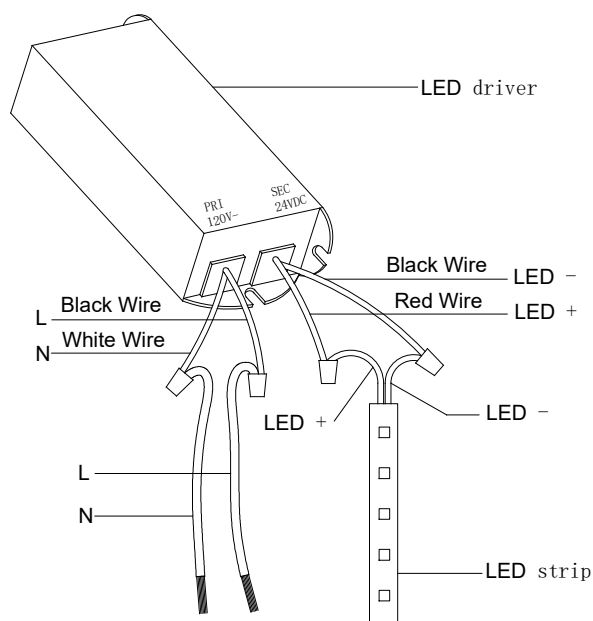



ALLEGRI.


BY KALCO LIGHTING™

Assembly & Installation Instructions for:

036621


Customer Service: (702) 361-4345, (800)525-2655, customer.service@kalco.com

Crystal Assembly:

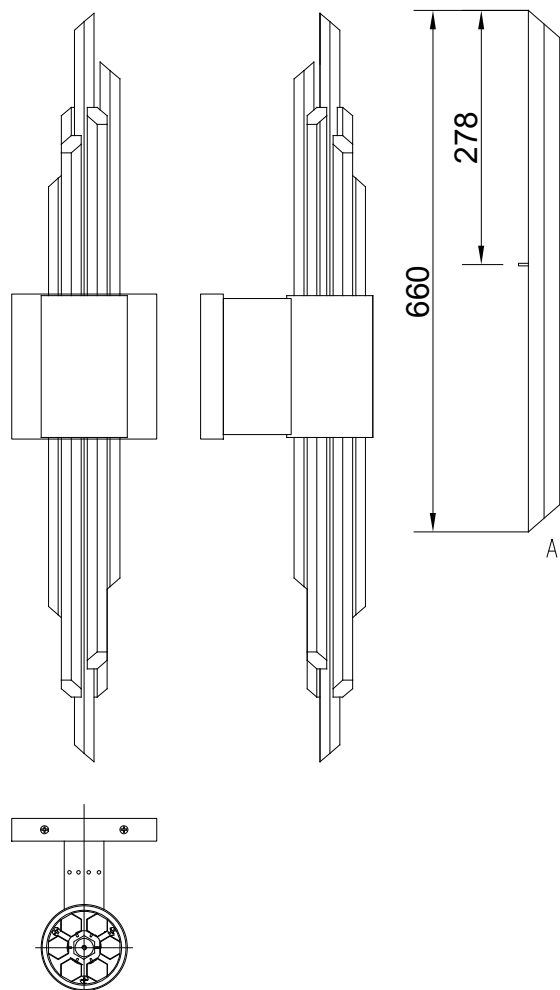


Hexagon clear crystal bar
20*L660mm
R20006-020-00-21



Code	Qty
A	1
B	1
C	2
D	2
D	1

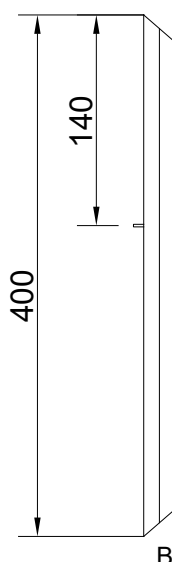


Hexagon clear crystal bar
20*L400mm
R20006-400-00-03

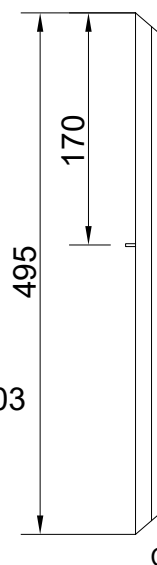

Hexagon clear crystal bar
20*L495mm
R20006-495-00-00

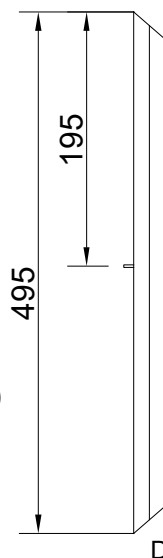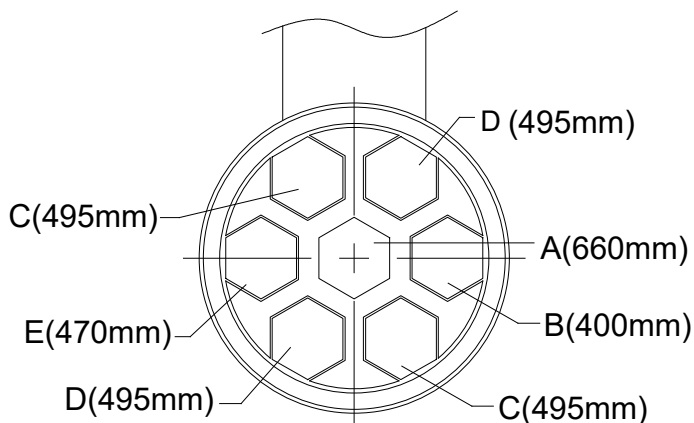

Hexagon clear crystal bar
20*L495mm
R20006-495-00-01

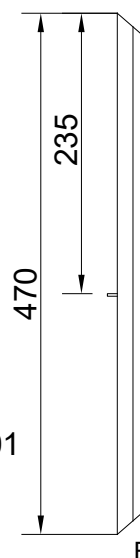

Hexagon clear crystal bar
20*L470mm
R20006-470-00-00

Customer Service: (702) 361-4345, (800)525-2655, customer.service@kalco.com

Fixture Assembly:

Step 2. Fasten 2 screws
into the mounting plate so they extend away from wall when the mounting plate is installed.

Step 3. Attach the mounting plate to outlet box
with screws

Step 4. Refer to wiring diagram.
Splice the ribbed side of fixture cord to the white supply wire from outlet box with wire connector. Splice the smooth side of the fixture cord to black supply wire from outlet box with wire connector

Step 5. Carefully tuck in all wires. Attach the backplate to the crossbar with mounting screws. Secure the fixture to the wall with the flat screws.

