




ALLEGRI.

BY KALCO LIGHTING™

Customer Service : (702)361-4345, (800)525-2655, customer.services@kalco.com





WARNING - TO REDUCE THE RISK OF FIRE OR INJURY:
Crystal Portable Fixture is Fragile. If you see any damage on the crate. Please take pictures of damage and contact our Customer Service immediately: customer.services@kalco.com

Fixture Assembly


Step 1. Screw part #3 to part #4.

Step 2. Put part #2 through part #4 .

Step 3. Install LED STRIPS.

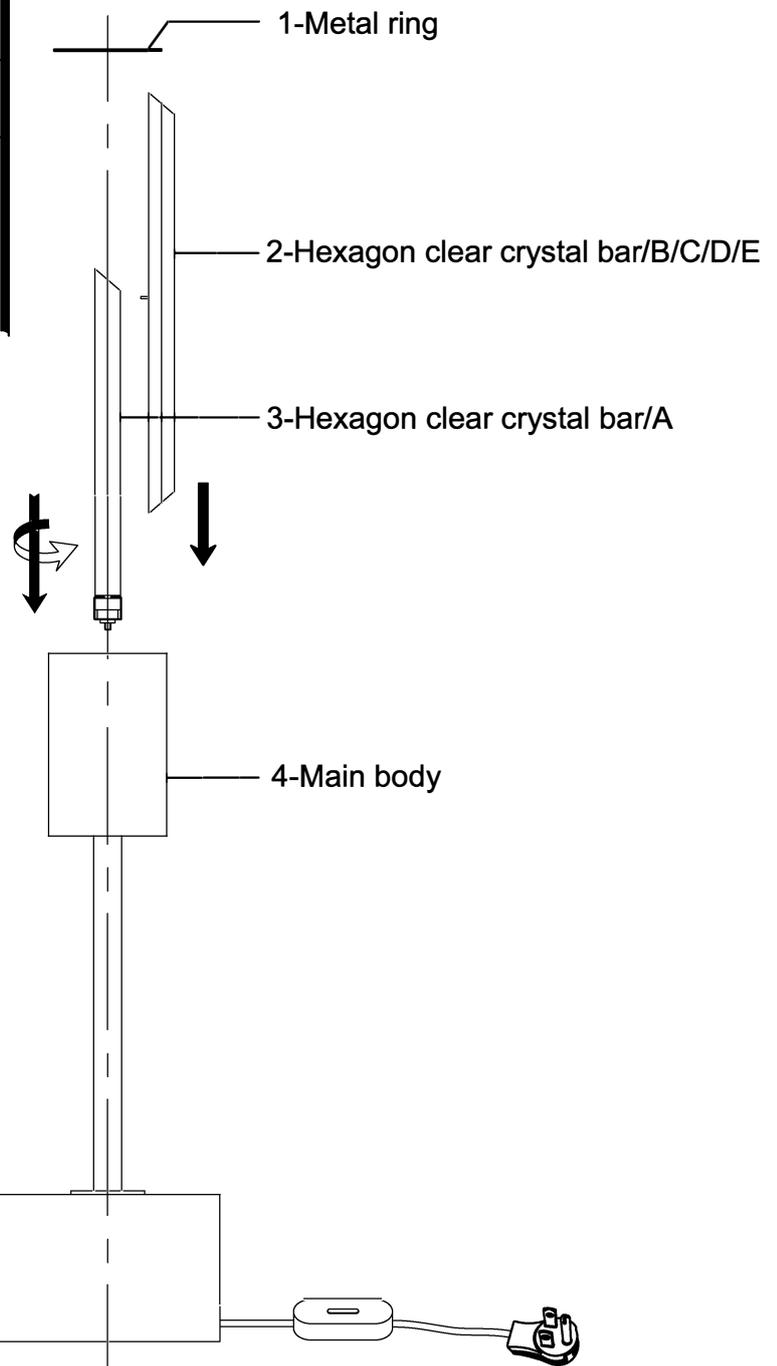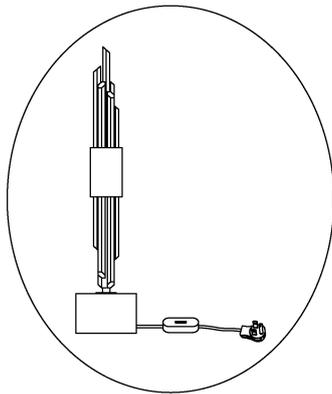

Wire connecting view

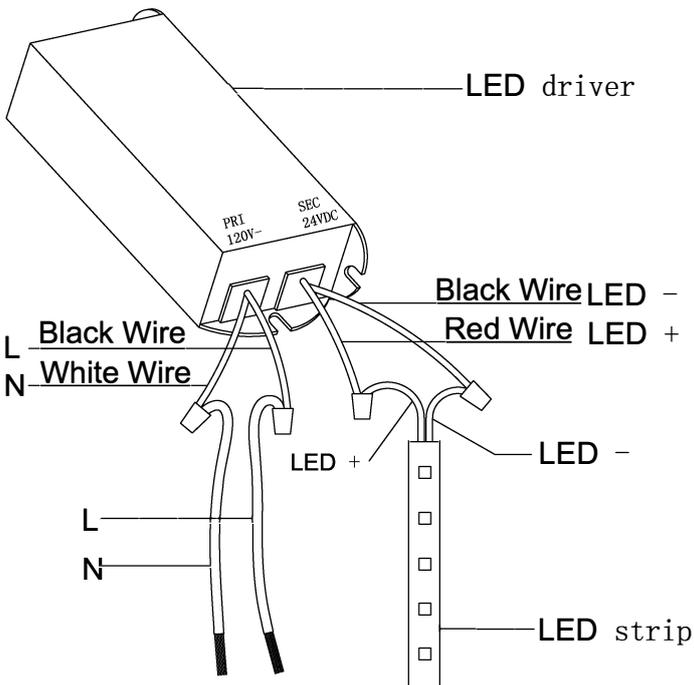




ALLEGRI.

BY KALCO LIGHTING™

Customer Service : (702)361-4345, (800)525-2655, customer.services@kalco.com

Assembly & Installation Instructions for:
037991 Table Lamp



Fixture Assembly

DIMMER SWITCH USE INSTRUCTION:

ON and OFF: quick pressure (less than 1 sec).

At ON, in order to help ignition of the lamp, it goes to the max, dimming value, after that it reaches latest memorized value.

MIN. and MAX: Continuous pressure (at every release of the button pressure the direction of the dimming is inverted).


Memorization of the latest setting made. It keeps the memory of last dimming, even in case of switching-off from a controlled electrical socket.

How to set the minimum adjustment modality: keep the button pressed for about 30 seconds to enter the minimum adjustment modality.

Once you have entered this function:

-the lamp switches on at the maximum brightness for about 2 seconds.

-Every 2 seconds the minimum brightness changes sequentially on 6 default values.
-to confirm the choice, release the button in correspondence of the wished brightness.

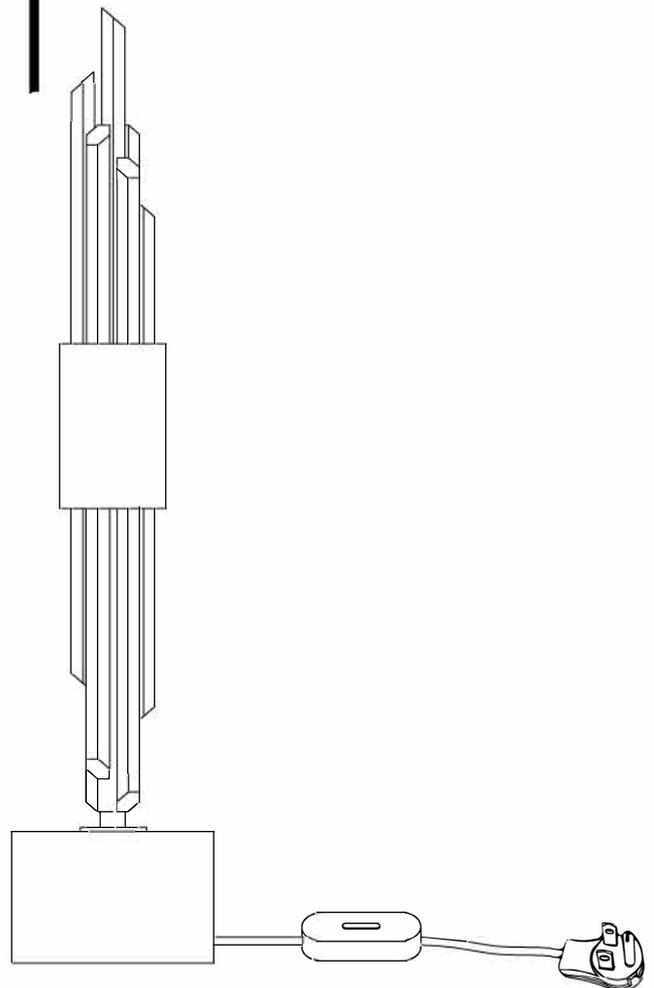




ALLEGRI.

BY KALCO LIGHTING™


Customer Service: (702) 361-4345, (800)525-2655, customer.services@kalco.com

Crystal Assembly:

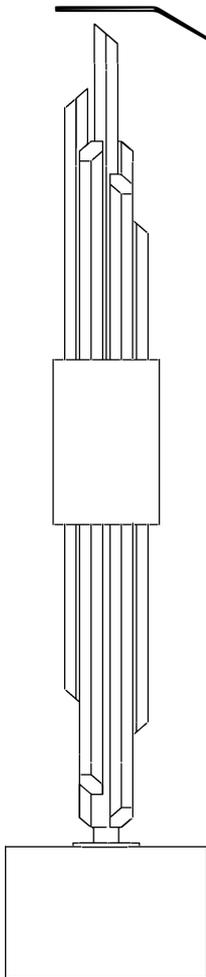


Metal ring (Lift the metal round ring from the frame first, then insert all of the crystal rods, then install this metal round ring into the frame to fix the crystal rods)

Code	Qty
A	1
B	1
C	2
D	2
E	1

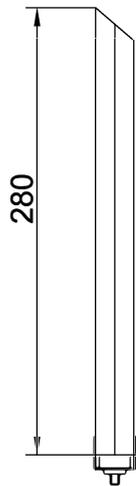


Hexagon clear crystal bar
20*L280mm
R20006-280-00-06

A

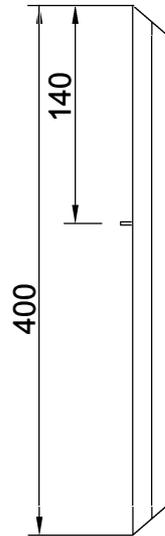



Hexagon clear crystal bar
20*L400mm
R20006-400-00-03

B

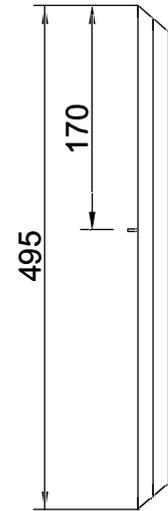


Hexagon clear crystal bar
20*L495mm
R20006-495-00-00

C

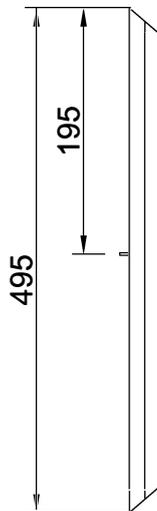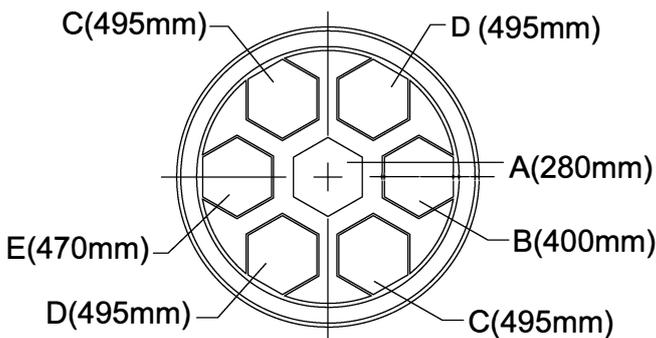

Hexagon clear crystal bar
20*L495mm
R20006-495-00-01

D

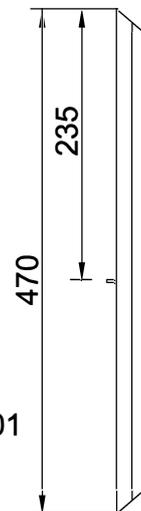

Hexagon clear crystal bar
20*L470mm
R20006-470-00-00

E