




If you have any questions or problems assembling your fixture please call us for assistance. Customer Service:(702)361-4345 or (800)525-2655, customer.services@kalco.com

WARNING:

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this. More than one person may be necessary to install this fixture, so make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.

FIXTURE ASSEMBLY

1. Use (2)8-32 screw to fix crossbar on the J-box;
2. Pass part#5&6 through part#4, then use hex nut to connect part#3 & #4 together;
3. Connect the main wire with the power supply circuit. See wire connection diagram.
4. Use grub screw to fix part#3 on the crossbar;
5. Push part#6 against wall, then use part#5 to fix;
6. Use part#1 to fix part#2 on part#4;
7. Screw part#7 on part#4;
8. Pass part#8 through part#7, then use part#9 to fix;
5. Install E12 bulbs,do not use bulbs that exceeds 40W.

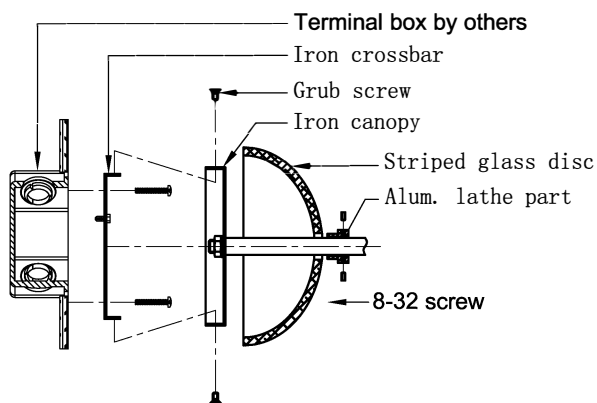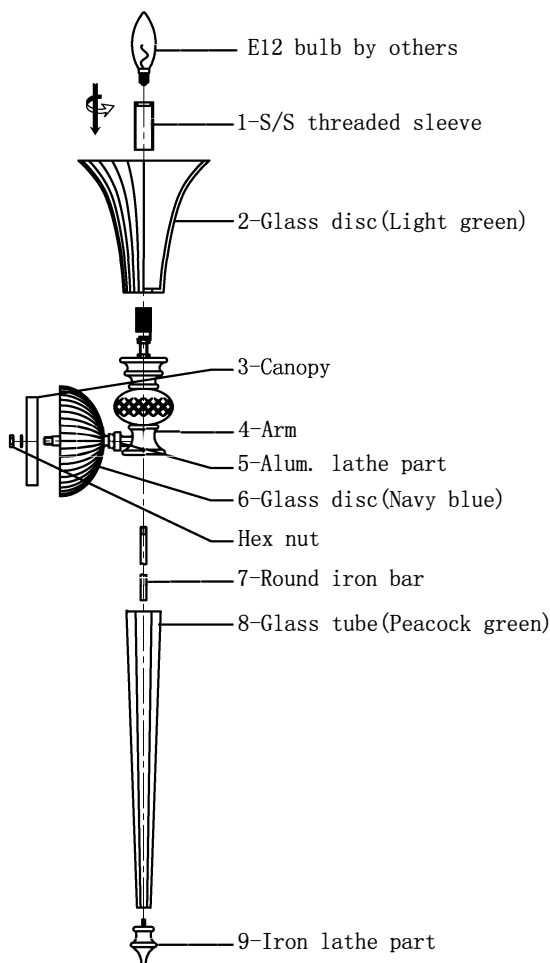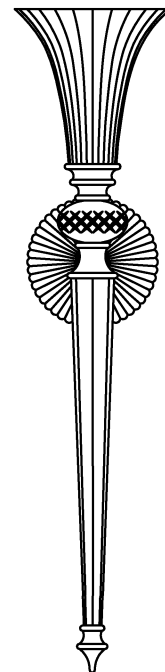

Wiring Diagram

