




ALLEGRI.

BY KALCO LIGHTING™

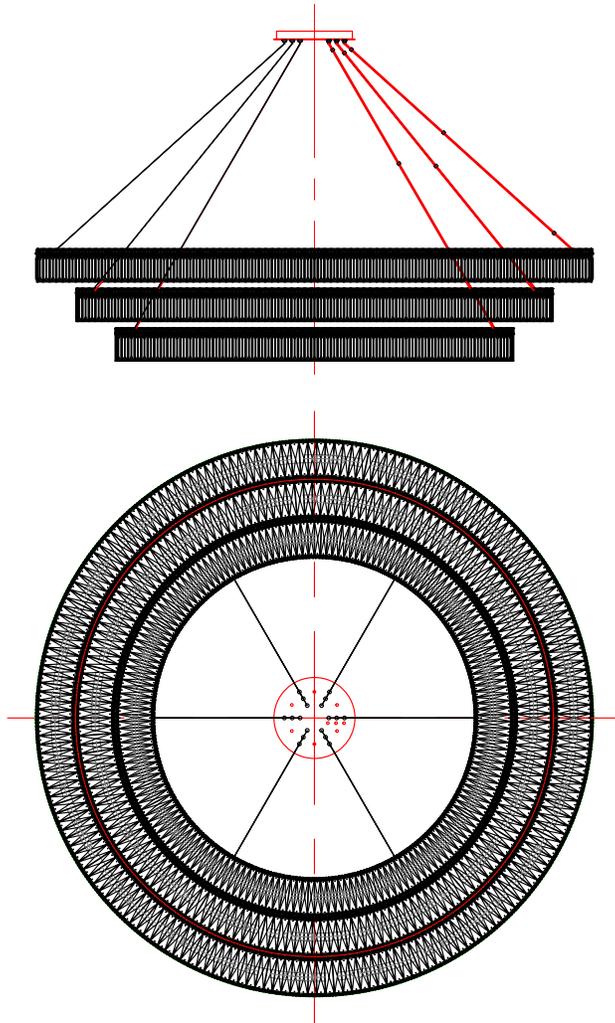

MODEL 11715

ASSEMBLY AND DRESSING INSTRUCTIONS

Blending innovative design, cutting-edge technology and the grace and elegance of traditional crystal, ALLEGRI® proudly brings you a new approach to lighting. ALLEGRI® fixtures are made from the finest raw materials and are brought to life through a combination of traditional manufacturing, such as sand casting, hand-forging and technology driven techniques including laser cutting.

Enclosed are detailed instructions on how to properly install your fixture. Please read all instructions carefully. If you need further assistance, please contact the dealer from which you purchased this product or call 800-525-2655 to speak with an ALLEGRI® customer service representative. We hope you enjoy your fixture!



ALLEGRI.

BY KALCO LIGHTING™

ASSEMBLY AND DRESSING INSTRUCTIONS

WARNING!

CONTENTS ARE FRAGILE HANDLE WITH CARE

THE METAL FRAME, FINISH AND CRYSTAL COMPONENTS OF THIS CHANDELIER ARE VERY DELICATE.
PLEASE EXERCISE EXTREME CAUTION DURING UNPACKING AND INSTALLATION.

PLACE ALL PIECES TOGETHER IN A NUMERICAL ORDER AND IN THE ORIENTATION DEPICTED.
REFER TO THE PARTS LIST TO AVOID ANY CONFUSION BETWEEN PARTS THE PARTS NUMBER MUST COINCIDE.

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY AND PROPERTY DAMAGE. All electrical components must be installed only by a Licensed Electrician. This product must be installed in accordance with the National Electric Code (NEC), and appropriate local electrical code(s), by a person familiar with the construction and operation of the product and the hazard involved.*

CAUTION: Do not exceed maximum wattage note on fixture. Uses only recommended bulbs with fixture.

GENERAL NOTES

- ❖ For your safety and proper operation of fixture, read and understand all instructions completely before commencing installation.
- ❖ This fixture is suited for dry locations. Never install fixture on damp ceiling; room should be dry and well ventilated.
- ❖ Extreme care should be taken to avoid damage to the surface of lighting fixture and wires. Wearing gloves is recommended for installation.
- ❖ Connect ribbed wire of lighting fixture to live wire, while smooth wire of lighting to neutral. Connect bare copper or silver color ground wire of fixture to the double colored or green wire of outlet box.
- ❖ Use UL LISTED wire nuts for the wiring connections in this fixture. Wrap wire nut connections with UL LISTED electrical tape.
- ❖ Keep lighting away from acid, alkali and other corrosive chemical or gas; clean the fixture with a clean cloth only.
- ❖ Fixture must be firmly secured when installing ceiling tube, chain pipe and other connecting parts.
- ❖ Never cover the lighting fixture when power is connected.
- ❖ Disconnect the power before installing, cleaning and/or replacing light bulb.
- ❖ Extreme care should be taken when installing and cleaning of Glass and/or Crystal Components.
- ❖ This product is rated 110-130V/60HZ bulb 40W Maximum.
- ❖ Save these instructions for future reference.

WARNING

The electricity must be turned off at the main fuse box or circuit breaker before installing this fixture. Turning the power off using the light switch may not be sufficient to prevent electrical shock.


*ALLEGRI will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.



ALLEGRI.


BY KALCO LIGHTING™

FRAME ASSEMBLY INSTRUCTIONS

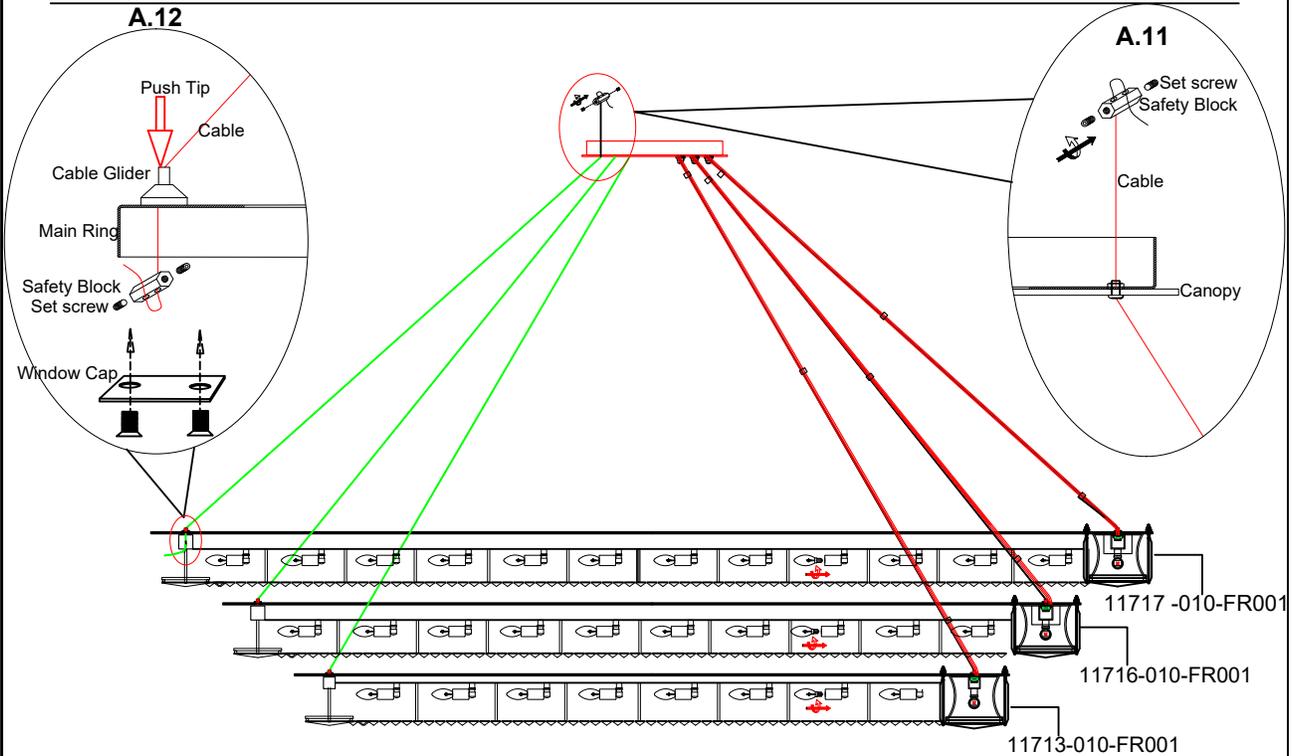

IDENTIFY FRAME COMPONENTS AND PACKING

- NOTE: This fixture is composed of 3 Main Rings. Each Ring is numbered with following codes from top to bottom:
 Tier 1: Code 11717-010-FR001 (Larger Ring) 84" dia.
 Tier 2: Code 11716-010-FR001 (Medium Size Ring) 72" dia.
 Tier 3: Code 11713-010-FR001 (Smaller Ring) 60" dia.
- Carefully unpack the 3 rings for assembly and lay them down on a clean working blanket (Place smaller Ring inside larger ones) release and extend all cables and wires to organize them, identify electric wires and line them up accordingly.
- Ring 11713-010-FR001 comes pre-assembled in one wood crate with its own crystal set. All bottom crystals (B) comes factory assembled (see page 6)
- Ring 11716-010-FR001 comes in two wood crates, because of the large diameter size they are packed in two halves. Look for the electric wire ends on both halves and make wire connections, tuck wire excess inside hollow square tube then Join the two halves together as shown in image A.13. Bottom crystals (B) are factory assembled (see page 6)
- Ring 11717-010-FR001 comes in two wood crates, because of the large diameter size they are packed in two halves. Look for the electric wire ends on both halves and make wire connections, tuck wire excess inside hollow square tube then Join the two halves together as shown in image A.13. Bottom crystals (B) are factory assembled. (see page 6)


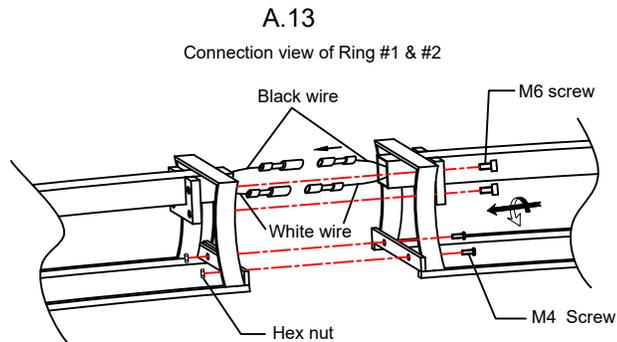




ALLEGRI.

BY KALCO LIGHTING™

CANOPY MOUNTING INSTRUCTIONS

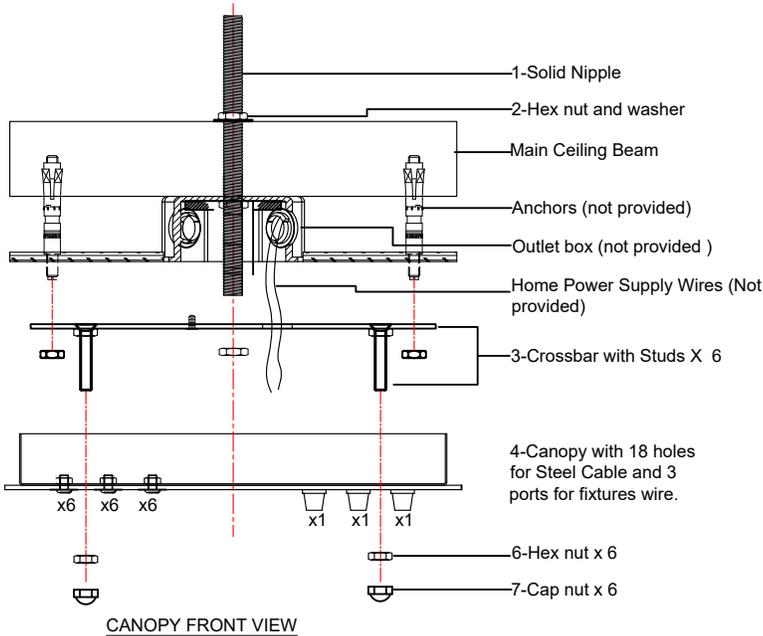

All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.




INSTALL CROSSBAR AS FOLLOWS:

CAUTION: Be sure power is off at the main breaker box prior to installation.

1. Drill a hole on main ceiling beam and pass Solid Nipple through.
2. Place Washer and Hex Nut on top of Solid Nipple to hold as shown in diagram.
3. Place Outlet Box through Solid Nipple and Secure it against beam with one more Hex Nut and Washer
4. Use crossbar3 center hole to Install it to Solid Nipple1 with the studs pointing towards the floor. Pass power supply and ground wires through crossbar side hole, secure crossbar with hex Nut and Washer. Install Anchors or screws depending on ceiling type.

(A.10) CANOPY BOTTOM VIEW

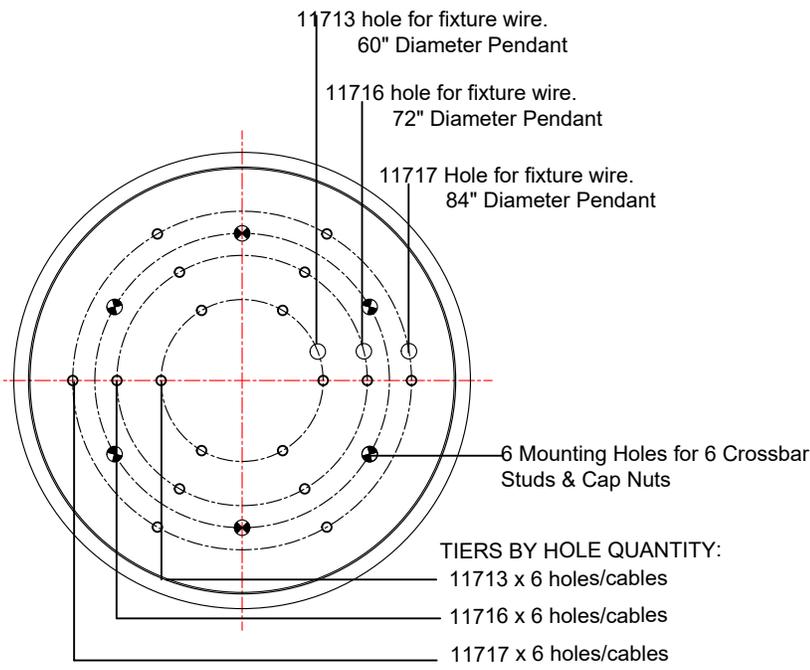

INSTALL RINGS ON CANOPY AS FOLLOWS:

8. Open each Ring Window Cap located under each Ring just below each Cable Glider (see image A.12 on page 3) then measure desired length for each cable from end of cable down to ring and mark it. Then pull excess of cable under ring, move Safety Block on cable against ring (do not cut cable just yet in case height adjustments are needed)
10. Install all cables to canopy and secure each end with the Safety Block inside canopy (See Image A.11 on page 3)
11. ADJUST CABLES:
Adjust cables from top Cable Glider on top of each ring and pull/push from the window located under each Cable Glider (see image A.12)
All cables can be adjusted for more length as desired or for more separation between Rings, just press down the tip of the Cable Glider on top of rings while pushing cable in or pulling from under the ring, release the tip and it will self lock. After all wires length are set secure cables with the Safety Block then cut cables with a few extra inches, tuck the excess inside square tube and close window, see image (A.12 on page 3)





ALLEGRI.

BY KALCO LIGHTING™

WIRE CONNECTIONS


MODEL: 11770

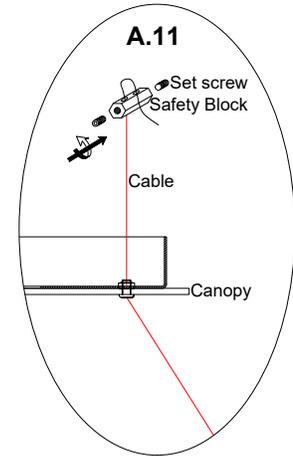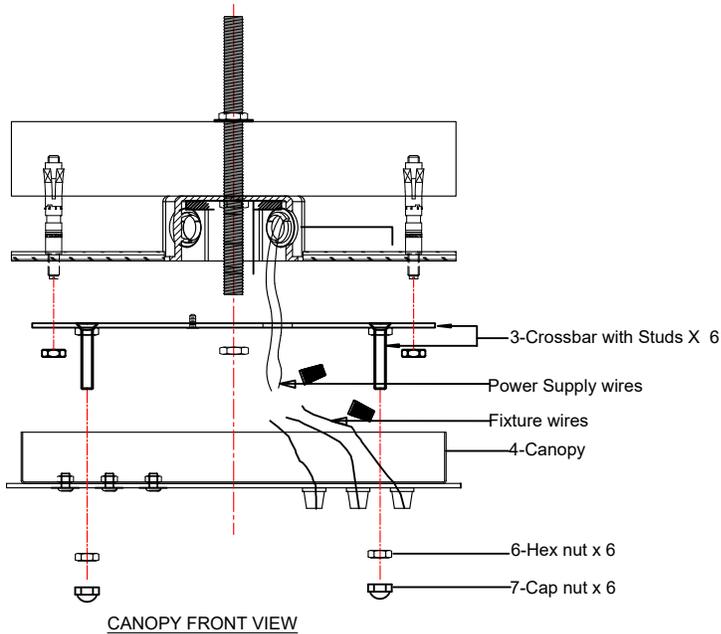

WIRING INSTRUCTIONS:

1-Identifying fixtures wires:

Each Tier comes with one 3 core clear silver wire type. Neutral, Live and Ground wires are encased into a round clear insulation sleeve. See image below:

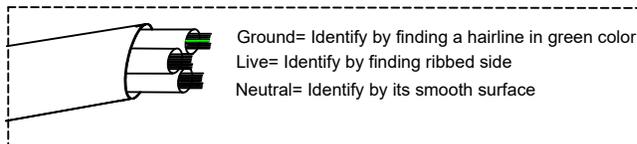


2-Using work blankets under fixtures to protect finish and crystals position fixtures on scaffolding close enough for the canopy to be raised close to ceiling to allow making the electric wire connections.

3-Make Sure main Breaker Panel is turned OFF!

Make connections as follows:

Connect fixture Ground Wire to Power Supply Green Ground Wire then connect fixture Live wire to Power Supply black wire finally connect fixture Neutral wire to Power Supply white wire. Review wire connections and make corrections before turning the breaker on. Make sure to isolate wire connections with wire nuts and black electricians tape or as determined by your local electric code.

4-Match 6 canopy holes to 6 crossbar studs and push flat to ceiling, install chrome hexnuts and capnuts, then install Candelabra bulbs to each Ring (max 40 watts ea.)
Proceed to Install Crystals on Rings as shown in page 6.

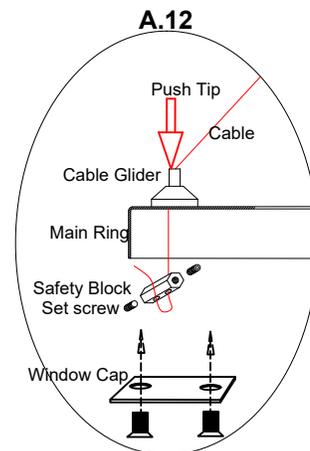




ALLEGRI®

BY KALCO LIGHTING™

CRYSTAL DRESSING INSTRUCTIONS

MODEL 11715

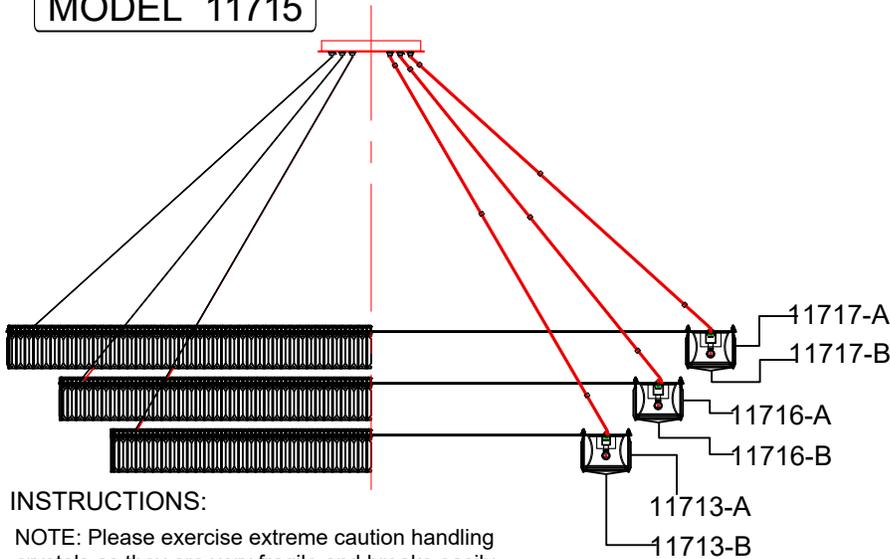

WARNING




Electrical Danger Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.



CODE	QTY
11713-A	342
11713-B	174

CODE	QTY
11716-A	418
11716-B	164

CODE	QTY
11717-A	490
11717-B	194


INSTRUCTIONS:

NOTE: Please exercise extreme caution handling crystals as they are very fragile and breaks easily, wear inspection cotton or latex gloves when touching crystals to avoid leaving finger print marks and to save time on cleaning.


-For our customers convenience all (B) crystals comes factory assembled.

Step1. Attach all crystal (A) to inner and outer side of ring as shown in image (A.14)

Keep these instructions for future maintenance purposes to purchase extra or replacement crystals.




Insert crystal strand sideways to the open slot in metal band, then turn crystal 45 degrees to the left and release. The square crystal will sit right in the slot.



K2021 22*22mm 1pcs


R20611-100-00-2G
22*100mm /1 pc

11713-A
11716-A
11717-A

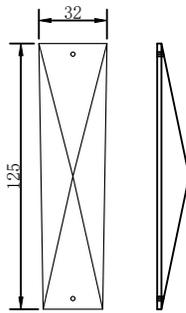

11716-B
11717-B

R20604-125-00-00
K604
32*28*L125*T15mm



11713-B

R20604-125-00-0G
K604
26*20*L125*T15mm



ALLEGRI.

BY KALCO LIGHTING™

LIGHTING CARE INFORMATION

Every ALLEGRI® fixture is of heirloom quality and will last for generations. To ensure it retains its brilliance and splendor for years to come, proper care and regular cleaning are necessary.

It is recommended that ALLEGRI® fixture, and particularly their crystal trim, be lightly dusted with a feather or lambs wool duster, or soft brush every two months, or whenever it appears dull or dusty. A thorough cleaning should be completed every six months.

Before cleaning an ALLEGRI® fixture, first locate the fixture's trim diagram. This will assist in replacing the crystal trim in its proper location after cleaning. Should a replacement trim diagram be required, please call 866-820-2665 to speak with an ALLEGRI® customer service representative, who can provide a new diagram.

ALLEGRI® recommends several different cleaning methods, depending on the type of fixture. Some fixtures can be cleaned with limited removal of crystal, while others must be completely untrimmed.

Place a soft towel or blanket directly beneath the fixture to limit the damage to both the crystal and the surface below the fixture, should a piece of crystal be dislodged during the cleaning process. Extreme care must be taken around any electrical fixture. For personal safety and the safety of the fixture, be sure that the fixture has been turned off. Never rotate or spin the fixture as this can cause the fixture to lose support and fall. Instead, move around the fixture while cleaning.

White Glove Method

Prepare a cleaning solution of one part isopropyl alcohol to three parts distilled water and place in a clean spray bottle. Do not use packaged cleaning fluids, as many of these contain ammonia, which may degrade the finish of the fixture and the quality of the crystal.

Wearing white cotton gloves, spray one glove with the solution and keep one dry. Gently polish each crystal with the damp glove and immediately wipe it with the dry glove. Do not tug or pull on the crystal, as this may cause the connectors to chip or crack the crystal, or dislodge it from the fixture.

Warning: To reduce the risk of personal injury due to fire and/or electric shock, never spray solution at or near the fixture.

Crystal Removal Method

Gently remove trim and hand-wash the crystal in lukewarm water using a mild detergent. Rinse in clean water and dry with a soft clean cloth. Do not soak finished crystal such as SWAROVSKI ELEMENTS Colors: Teak, Golden Shadow or Silver Shade, for extended periods, as this may degrade the crystal's finish.

With the fixture untrimmed and turned off, wipe the frame, including the light bulbs once they are completely cool, with a soft cloth.

Wearing white gloves, finger-cots or using a soft clean cloth, gently replace the trim as directed in the trim diagram.