KALCO Handcrafted Since 1980®

MODEL: 507540BI
MORRE 16" CONVERTIBLE (SEMI FLUSH/PENDANT)

I M A G E

FLUSH MOUNT

PENDANT

If you have any questions or problems assembling your fixture please call us for assistance.
Customer Service: (702) 361-4345 or (800) 525-2655
customer.service@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.

2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.

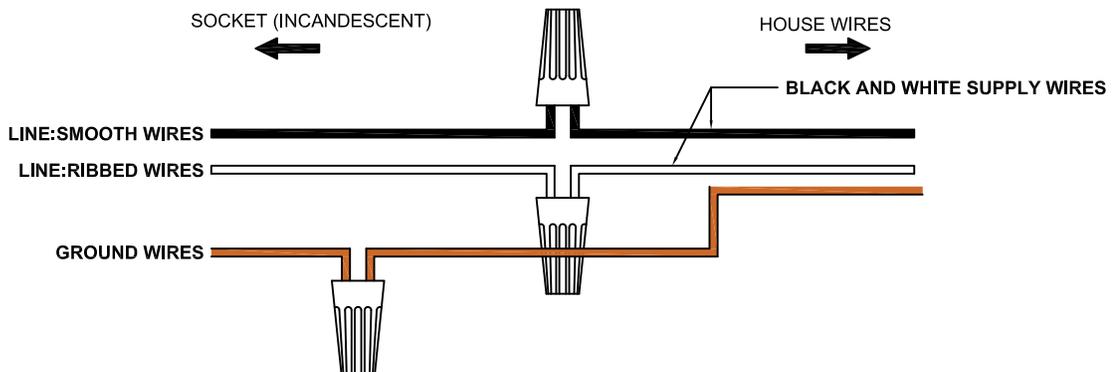3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problémes assemblage de votre dispositif s'il vous plait appel pour l'assistance.
Customer Service: (702) 361-4345 or (800) 525-2655
customer.service@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Si vous n'êtes pas familier avec le câblage électrique, appelez un électricien qualifié pour installer cet appareil. Plus d'une personne peut être nécessaire d'installer appareil, assurez vous que vous disposez de l'aide assez qualifié.

2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée

3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.
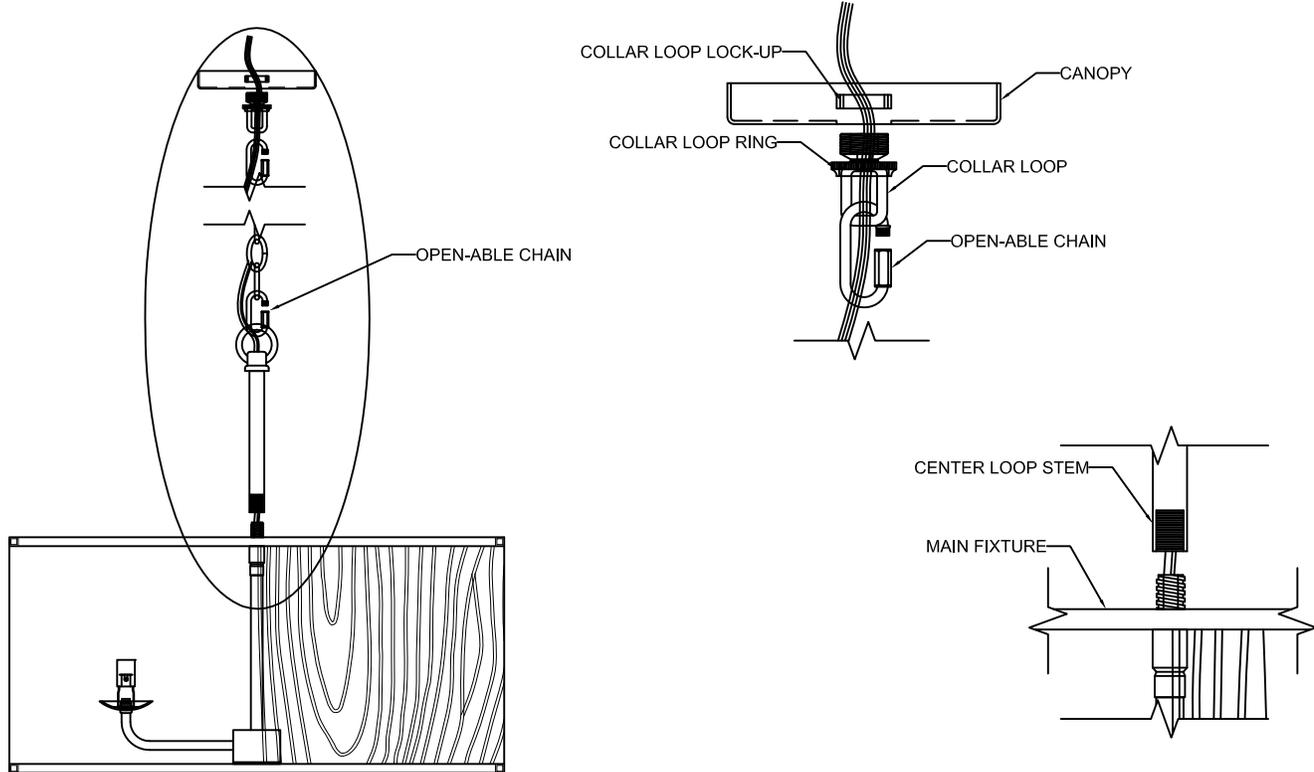
W I R I N G   D I A G R A M

SOCKET (INCANDESCENT)

HOUSE WIRES

BLACK AND WHITE SUPPLY WIRES

LINE:SMOOTH WIRES

LINE:RIBBED WIRES

GROUND WIRES

KNOCK DOWN ASSEMBLY INSTRUCTIONS 1 (PENDANT OPTION)

COLLAR LOOP LOCK-UP

CANOPY

COLLAR LOOP RING

COLLAR LOOP

OPEN-ABLE CHAIN

OPEN-ABLE CHAIN

CENTER LOOP STEM

MAIN FIXTURE

STEP 1: Determine fixture height and make adjustment on the chain and assemble pendant option as shown.

KNOCK DOWN ASSEMBLY INSTRUCTIONS 2 (SEMI-FLUSH OPTION)

COLLAR LOOP LOCK-UP

CANOPY

COLLAR LOOP RING

CUSTOMIZED COLLAR LOOP

CENTER STEM

MAIN FIXTURE
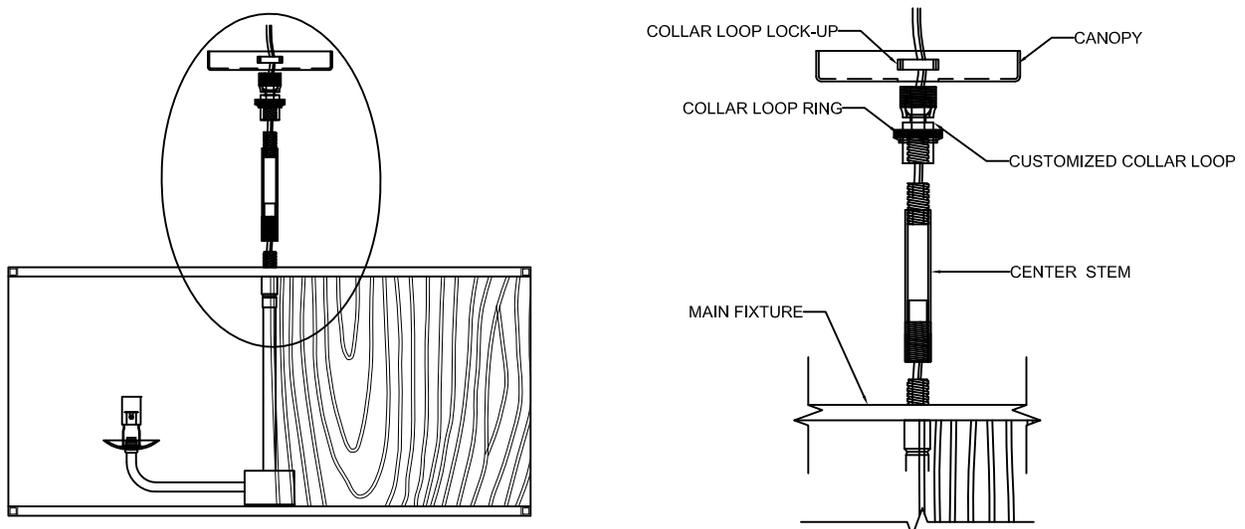
STEP 2: Use the center stem provided for semi flush option.

M O U N T I N G   I N S T R U C T I O N S

STEP 3: Fasten (2) 8-32 x 1 ½" studs into mounting plate so that they extend away from the ceiling when the mounting plate is installed.

STEP 4: Attach mounting plate to outlet box with the (2) 8-32 x 3/4" screws.

STEP 5: Connect bare ground wire from the outlet box (if supplied) with connectors.

STEP 6: Lace the wire through the chain link (every other link) (For pendant option).

STEP 7: Refer to wiring diagram. With wire carefully threaded thru canopy, connect the black supply wire to the smooth fixture wire with wire connector, connect the white supply wire to the ribbed fixture wire with wire connector.

STEP 8: Carefully tuck all wires into outlet box ensuring that there are no wires pinched between the canopy and ceiling.

STEP 9: Attach the canopy to mounting plated and lock it by using two (2) pcs. of ball nut.

JUNCTION BOX (NOT INCLUDED)
BLACK & WHITE SUPPLY WIRES
GROUND SUPPLY WIRE
MOUNTING PLATE
8/32" x 1 1/2" STUD
8/32" x 3/4" SCREW

MOUNTING PLATE
BLACK & SMOOTH WIRE
GROUND WIRE
WHITE & RIBBED WIRE
CANOPY
BALL NUT
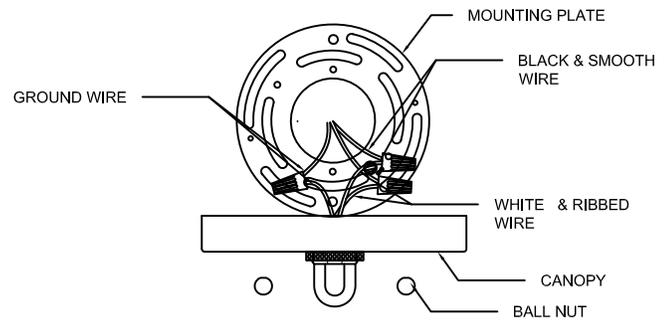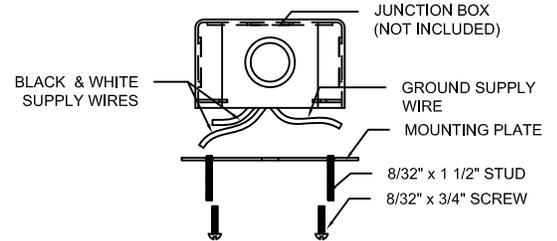
C O M P O N E N T   A S S E M B L Y   I N S T R U C T I O N S

60W BULB (NOT INCLUDED)
CANDLE COVER
SOCKET
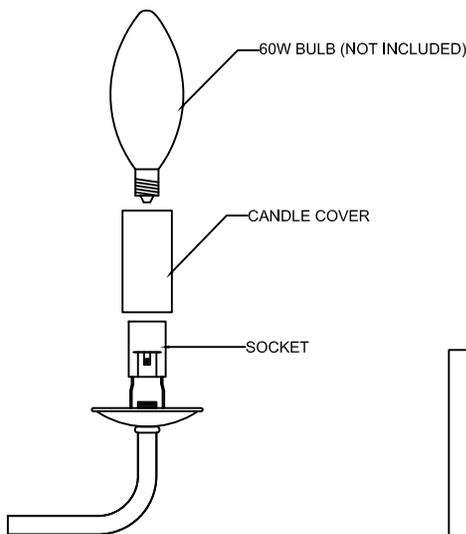
STEP 10: Insert the candle cover to the socket. Install bulb, do not use bulbs that exceed 60Watts.

LIGHTING MAINTENANCE:

- Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.

- Refrain from using harsh cleaning liquids that may cause chemical reaction on the hand painted finishes.

- Always refer to the Assembly Instruction before removing any components.
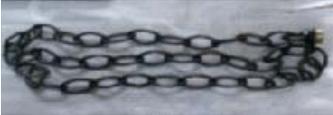
- **HANDLE WITH CARE.**

PARTS LIST

IMAGE	PARTS NAME	QTY
	X2-A Parts Bag	1 PC
	Screw	2 PCs
	Ball Nut	2 PCs
	Hex Nut	2 PCs
	Stud	2 PCs
	Canopy	1 PC
	Candle Cover	3 PCs
	Open-able Chain Link (Pendant)	2 PCs
	Chain (4ft.) with Collar Loop (For Pendant)	1 PC
	Fixture Loop (For Pendant)	1 PC
	Center Stem & Hang Straight (For Semi Flush)	1 PC / Set